

JOB NAME

ITEM NO.


SUBMITTED AS SHOWN

SUBMITTED AS NOTED

SEE ATTACHED FOR  
SUBMITTED MODIFICATION



ADA COMPLIANT

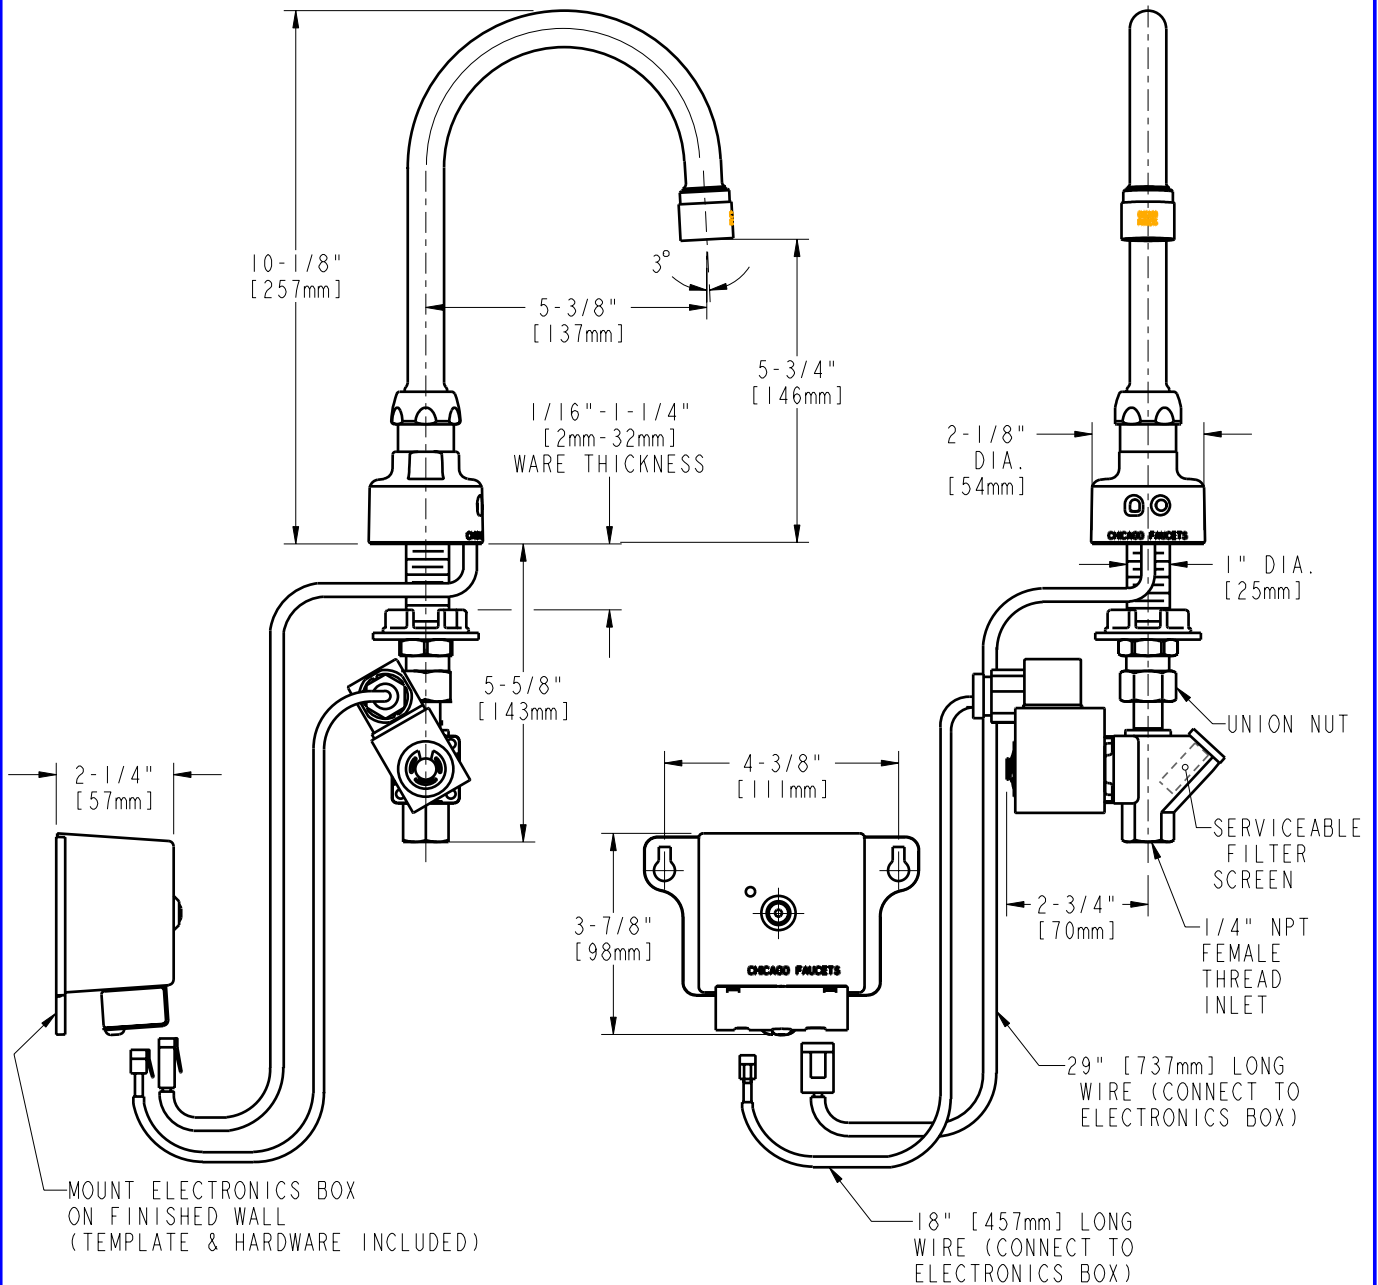

TECHNICAL DATA

- SINGLE HOLE ELECTRONIC SINK FITTING WITH INFRARED SENSOR
- FORGED BRASS SPOUT BASE
- GN2AH8 GOOSENECK SPOUT
- 6 VOLT D/C POWER REQUIRED. TRANSFORMER NOT SUPPLIED
- MULTIPLE FIELD CONFIGURABLE OPERATING MODES

- E2805-5 0.5 GPM (1.9 L/min) VANDAL RESISTANT ECONO-FLO SPRAY OUTLET
- INCLUDES OPTIONAL E3VP 2.2 GPM (8.3 L/min) AERATOR INSERT
- CHROME PLATE FINISH
- CSA B125 AND ASME A112.18.1M CERTIFIED

DATE: 05-01-02

BY: SID

CHK'D:

APP'D:

REV: 11-21-06

652

ROUGHING IN DIMENSIONS MAY VARY AND ARE SUBJECT TO CHANGE. NO RESPONSIBILITY IS ASSUMED FOR USE OF SUPERCEDED OR VOIDED DATA.