

RECESSED NIGHT LIGHTS

Installation instructions for RNLS-1 and RNLS-2

Please read carefully before installation


WARNING: To avoid electrical shock or fire, turn off electrical power at circuit breaker or fuse. Test and make sure the power is off before wiring. These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with the owners manual, current electrical codes and/or the current National Electric Code (NEC).

1. Remove decorative faceplate of the Recessed Night Light.
2. Check if fixture will fit in your junction box first. Knock out appropriate screw mounting holes.
3. Remove existing wall plate and outlet if applicable.
4. Strip wire insulation to expose 3/4" bare copper at end of each circuit lead.
5. Using wire nuts, connect white wire from Recessed Night Light to white wire from house.
6. Using wire nuts, connect black wire from Recessed Night Light to black wire from house.
7. Connect green ground wire from the Recessed Night Light to green ground wire from house.
8. Secure all wire nuts to wires with electrical tape to assure they will not come off accidentally.
9. Mount fixture to the junction box with screws provided. Snap on decorative faceplate.
10. Turn on the power at circuit breaker or fuse.

To Replace Bulb:

1. Turn off fixture and allow lamp to cool before replacing bulb.
2. Use only 10 watt/120 volt maximum JCD G8 bulb (Part no. LXCP-10BP).
3. Remove the faceplate and the cover.
4. Remove the old bulb and insert new bulb, using a soft cloth. Do not touch bulb with fingers. The oil from your hands will shorten the life of the bulb.
5. Reattach the faceplate and turn on the fixture.

NOTE: This product is designed for indoor use only. Do not use it outdoors.

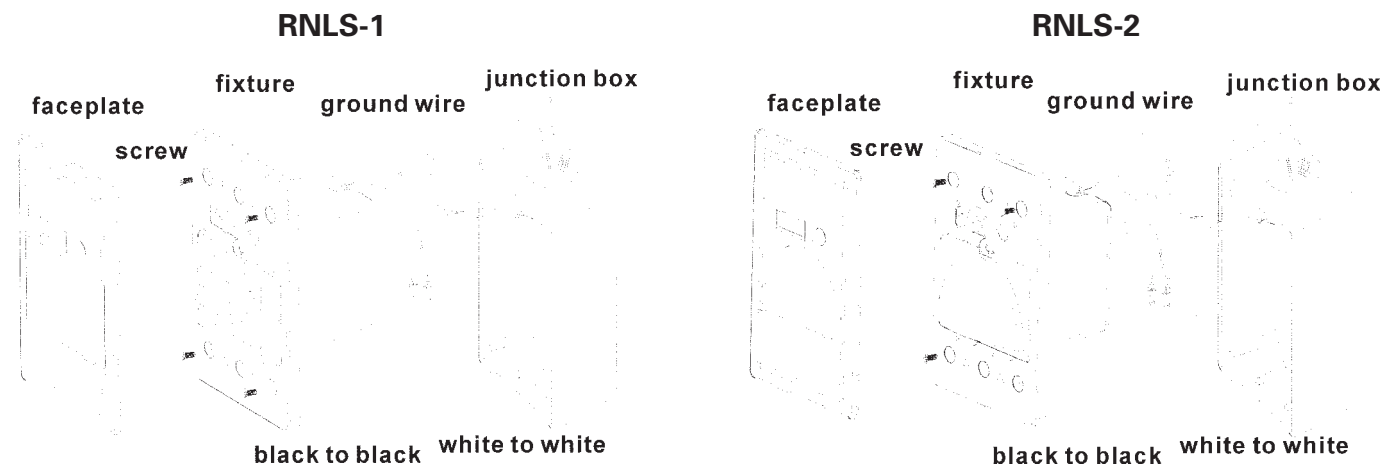

AMERICAN LIGHTING
BRIGHT IDEAS • INNOVATIVE PRODUCTS

www.americanlighting.com

RECESSED NIGHT LIGHTS


Installation instructions for RNLS-3 and RNLS-4

Please read carefully before installation

WARNING: To avoid electrical shock or fire, turn off electrical power at circuit breaker or fuse. Test and make sure the power is off before wiring. These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with the owners manual, current electrical codes and/or the current National Electric Code (NEC).

1. Remove decorative faceplate of the Recessed Night Light.
2. Check if fixture will fit in your junction box first. Knock out appropriate screw mounting holes.
3. Remove existing wall plate and outlet if applicable.
4. Strip wire insulation to expose 3/4" bare copper at end of each circuit lead.
5. Using wire nuts, connect white wire from Recessed Night Light to white wire from house.
6. Using wire nuts, connect black wire from Recessed Night Light to black wire from house.
7. Connect green ground wire from the Recessed Night Light to green ground wire from house.
8. Secure all wire nuts to wires with electrical tape to assure they will not come off accidentally.
9. Mount fixture to the junction box with screws provided. Snap on decorative faceplate.
10. Turn on the power at circuit breaker or fuse.

NOTE: This product is designed for indoor use only. Do not use it outdoors.

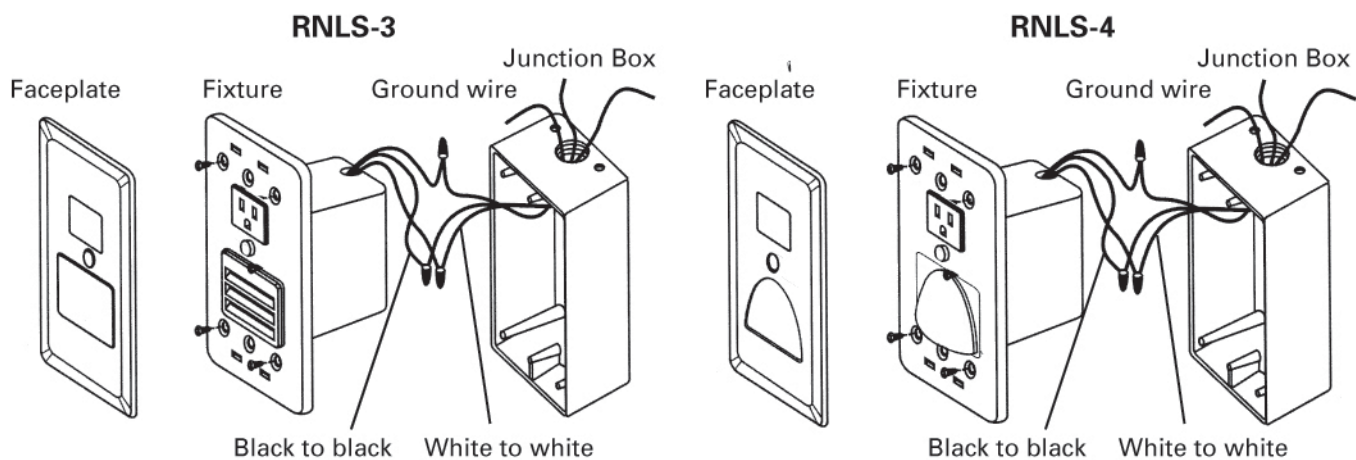

AMERICAN LIGHTING
BRIGHT IDEAS • INNOVATIVE PRODUCTS

www.americanlighting.com