GLIDE ADJUSTMENT

INSTALLATION INSTRUCTIONS

Illustration 1

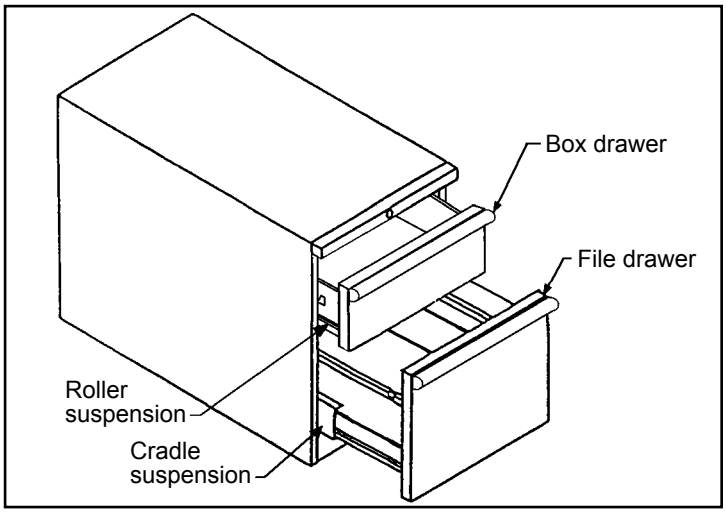

Illustration 2

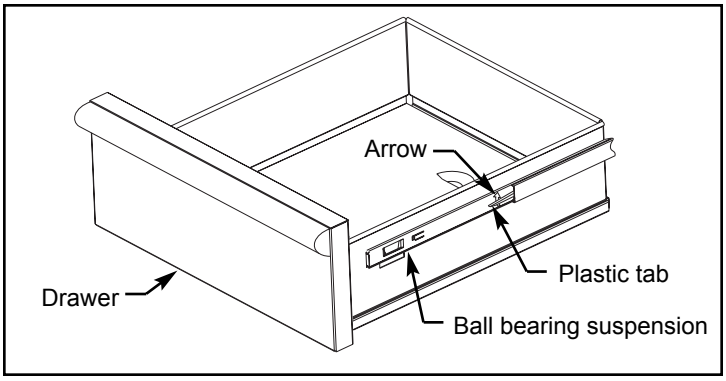

Illustration 3

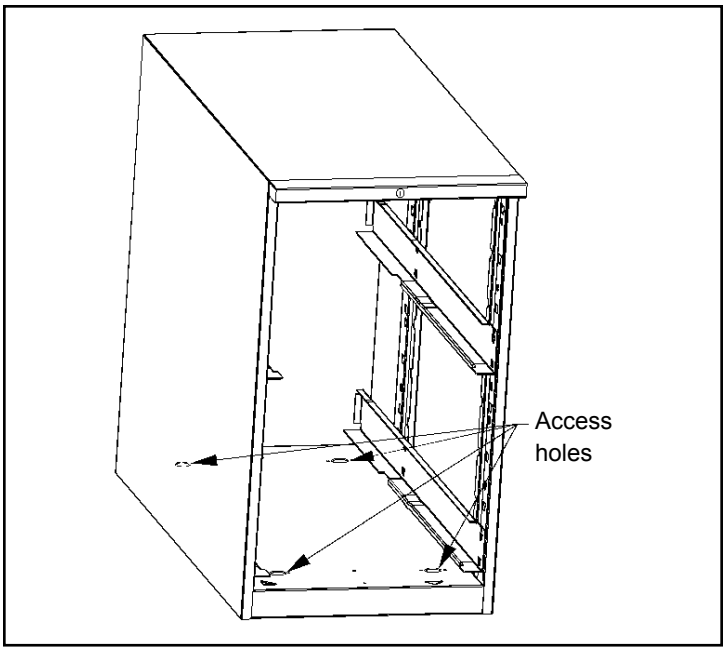

Read all instructions and review illustrations before installing.

Tools required for assembly:
¼" Socket Socket wrench
Flat blade screwdriver (optional)

Assembly hardware pack contains:
None

⚠WARNING

Full drawers can be very heavy. To avoid injury, remove contents before removing drawer.

Lifting a drawer with a drawer accessory (hangrails, dividers, or followers) can cause the drawer accessory to come loose. The drawer can fall and cause serious injury to you or others. Lift drawer by a fixed part of the drawer.

Sharp edges may cause injury. Take care when handling metal parts.

Glide Adjustment:

1. After unloading, remove drawers from hanging pedestal as described below:

   Roller suspended drawers (box drawer only): Refer to Illustration 1. Open completely, lift front approximately 2½", and slide out until drawer stops. Lower front of drawer and lift rear free of tracks.

   Cradle suspended drawers (file drawer only): Refer to Illustration 1. Open completely, lift front approximately 2½", and slide out until free of cradle. Lift front of cradle and slide it free of cabinet.

   Ball bearing slide suspended drawers (box or file drawer): Refer to Illustration 2. Open completely. Locate plastic tabs, and arrows, on side of each ball bearing slide suspension. Push plastic tabs in the direction of the arrows and slide drawer free of cabinet.
2. Position pedestal under work surface.
3. Refer to Illustration 3. Locate glide access holes in bottom of pedestal.
4. Insert ¼" socket through access hole and onto hex post on top of glide. Turn glide clockwise to raise pedestal or counter-clockwise to lower.
5. Repeat Step four for each glide until pedestal is level.
6. Reinstall drawers.