Philippe Starck Two-Handle Wall-Mount Lavatory Faucet 10313XX1 Trim

Trim kit available in chrome (00) or satinox (81)

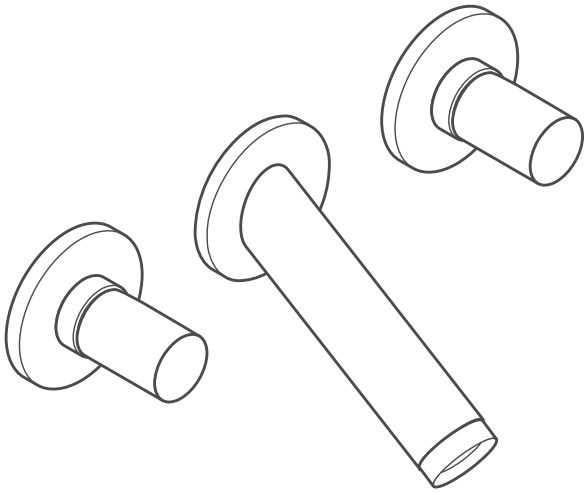

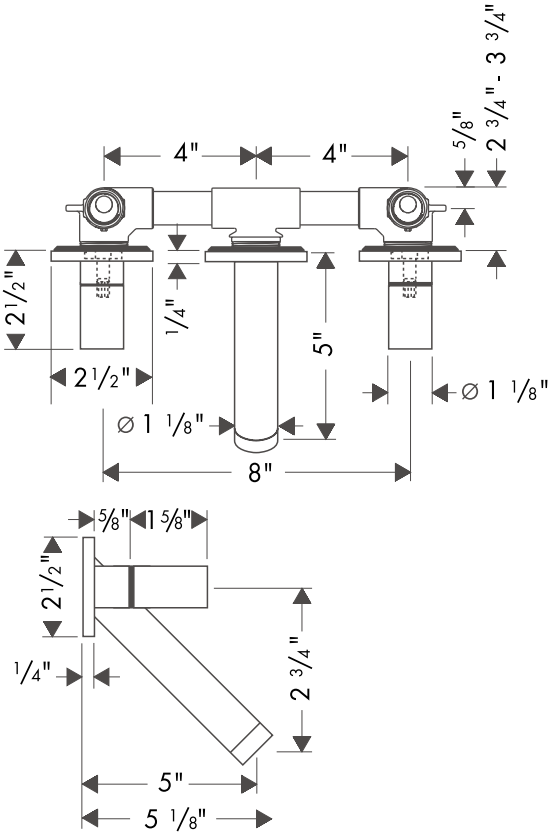

Product Specification

Flow Rate	2.2 GPM
Maximum incoming water pressure	145 PSI
Recommended incoming water pressure	22 - 72.5 PSI
Recommended incoming hot water temp	120° - 140° F*
Ceramic valve cartridges	
Drain not included	
Requires rough-in 10303181	

*Some governing bodies require that the water heater be set to 120° F or less. Please know and follow all local codes when setting the temperature on the water heater.

Follow all local codes regarding the required air gap between the end of the spout and the flood level of the sink.

AXOR®