


# INSTALLATION AND SAFETY INSTRUCTIONS

## GENERAL

You don't need special tools to install this fixture. Be sure to follow the steps in the order given. Under no circumstances should a fixture be hung on house electrical wires, nor should a swag type fixture be installed on a ceiling which contains a radiant type heating system. NOTE: Proper wiring is essential for the safe operation of this fixture. Read instructions carefully. **If you are unclear as to how to proceed, consult a qualified electrician.**

**WARNING: BE SURE THE ELECTRICITY TO THE WIRES YOU ARE WORKING ON IS SHUT OFF. EITHER THE FUSE REMOVED OR THE CIRCUIT BREAKER OFF.**

NOTE: These fixtures are equipped with a Hi/Low switch. Dimming these fixtures are not recommended.

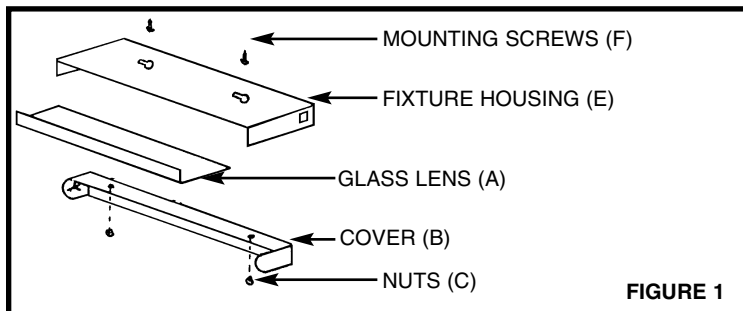

## INSTALLATION

Carefully remove the fixture from the carton and check that all parts are included, as shown in Figure 1. Be careful not to misplace any of the screws or parts which are needed to install this fixture.

### STEP 1:

Remove glass lens (A). Remove cover (B) by taking off the (2) nuts (C) at each end of the fixture.

### STEP 2:

Knock out hole for power supply in fixture housing (E). In the knocked-out hole insert a "Romex Type" connector (not supplied) or a "BX type" connector (not supplied) which-ever is applicable. Feed supply wires through it and secure the wires in place.

### STEP 3:

Mount fixture housing in desired location using mounting screws (F).

### STEP 4:

Attach black wire (or red wire which ever is applicable) from switch wire, with a wire connector (not supplied) to the black supply wire.

### STEP 5:

NOTE: Undercabinet mount only.

Attach white wire from fixture, to the white supply wire using a wire connector (not supplied).

**GROUNDING INSTRUCTIONS:** Connect the ground wire from the fixture (if supplied) and the ground wire from the supply wires using a small wire connector (not supplied).

NOTE: Underwriters Laboratories (U.L.) does not require all fixtures to have ground wires. These fixtures still meet all U.L. specifications. The listing mark of Underwriters on the product identifies products manufactured under its listing and Follow-Up Service Programs.

**NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.**

## FINAL ASSEMBLY

### STEP 1:

After wires are connected, replace cover (B). Secure with nuts (C).

### STEP 2:

Install lamp(s).

### STEP 3:

Install glass lens (A).

## CAUTION

1. "CAUTION-RISK OF FIRE OR ELECTRICAL SHOCK,CONNECT ONLY TO OTHER LIGHTS. DO NOT EXCEED 6 UNITS OR 240 WATTS MAXIMUM."
2. BULB GETS HOT QUICKLY! TURN OFF AND ALLOW TO COOL BEFORE REPLACING BULB, OR INSTALLING OR REMOVING SPRING.
3. DO NOT LOOK DIRECTLY AT LIGHTED BULB.
4. "WARNING - RISK OF FIRE.  
- FOR FIXTURES: 9818, 9819 & 9820: USE 12 VOLT T5 WEDGE BASE 18W MAX XENON LIGHT BULB (#9774).  
- FOR FIXTURES: 9821, 9822 & 9823: USE 120v T4 G-8 HALOGEN 35 WATT MAX. LIGHT BULB (# 9734-32).
5. CAUTION - RISK OF FIRE: KEEP AWAY FROM COMBUSTIBLE MATERIALS.  
DIMMING HALOGEN LAMPS GREATLY REDUCES LAMP LIFE  
IMPORTANT SAFETY INSTRUCTIONS  
DO NOT OPERATE THE LUMINAIRE FITTING WITH A MISSING OR DAMAGED SHIELD.
6. BE SURE THERE IS 2" OF SPACE AROUND EACH SIDE OF THE FIXTURE TO DISSIPATE HEAT.
7. FOR FIXTURE NUMBERS 9821, 9822, 9823 THE MAXIMUM DISTANCE FROM FIXTURE TO OUTLET (OR INTERCONNECTING FIXTURE) IS DETERMINED BY LENGTH OF CORD AND PLUG OF FIXTURE. MAXIMUM DISTANCE 36".



**sea gull lighting®**

## Installation And Safety Instruction HC-528 062606

Line art shown may not exactly match the fixture enclosed. However, the installation instructions do apply to this fixture.

Fill In Item Number On Carton And  
File This Sheet For Fixture Reference. ITEM# \_\_\_\_\_