



W•A•C | LIGHTING


Experience the value.
Value the experience.

615 South Street, Garden City, NY 11530
Tel: (516) 515-5000 Fax: (516) 515-5050
www.waclighting.com © 2005

CATALOG NUMBER	TYPE
PROJECT	

LOW VOLTAGE ELECTRONIC TRANSFORMER

MODEL EN-1260-RB2

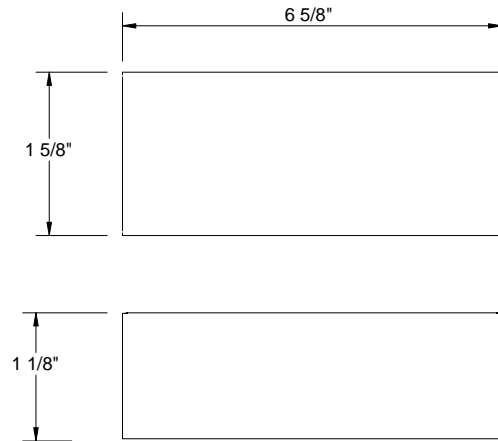

Ordering Matrix

Model	Finish	Accessories
EN-1260-RB2	BK	See table below

Ordering Example (*model*) : EN-1260-RB2

Product Details

Description:	Low Voltage Class II electronic transformer designed to be used as an enclosed remote transformer. Enclosure has separate compartments for transformer, line and low voltage wiring. Transformer may be safely loaded to 100% of stated capacity.
Catalog Number:	EN = Advanced electronic circuitry 1260 = 12 volt , 60 watt RB = Remote Boxed, Class II AR = Auto-Reset
Input:	120V (50/60Hz)
Output:	12V
Min Load:	20W
Max Load:	60W
Max Input Amp:	0.53A (@ 120V)
Transformer Frequency:	20khz. True RMS meter is required to read the high frequency output.
Dimming:	Dimmable with electronic low voltage dimmers. Dimmers should always be installed on the primary side of the transformer.
Listing:	U.L. listed, File Number E204239.
Accessories:	MTB-01 – Terminal Block

Specification Features

- U.L. 2108 listed Class II electronic low voltage transformer.
- Built-in auto reset, soft start, short and overload circuit protection features.
- Soft start delayed start feature extends lamp life.
- Protects the lighting system from both normal and abnormal short circuits.
- Class II transformers are inherently protected and power limited.
- 3 year W•A•C Lighting product warranty.