


FSCT Flat Screen 0° - 15° Tilt Ceiling Mount

Direct Monitor Attachment

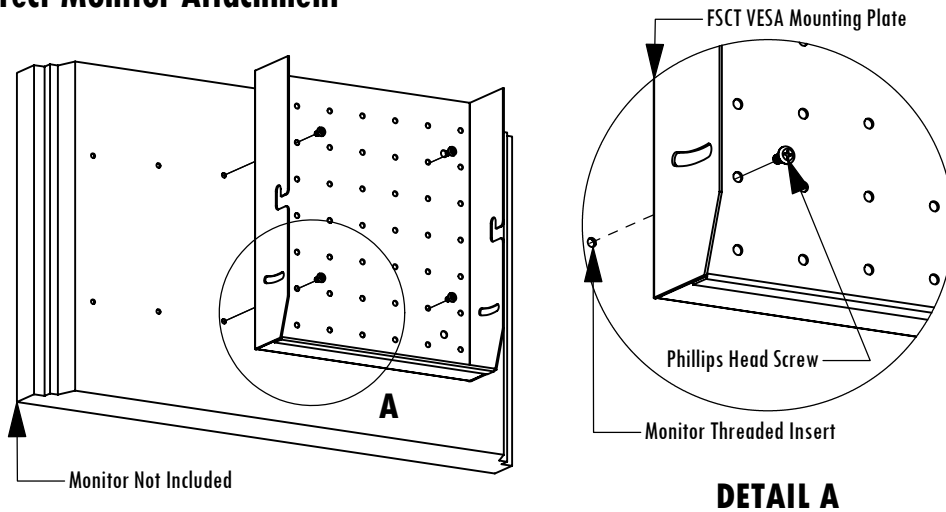

Determine which type of monitor attaching hardware is required for the monitor as specified by the monitor manufacturer. Various sizes of monitor attaching screws are provided for convenience (See the Hardware List below). If mounting the monitor directly to the FSCT VESA Mounting Plate, follow the Direct Monitor Attachment instructions. If mounting the monitor using an Adaptor Plate, follow the Monitor Attachment with Adaptor Plate instructions.


Direct Monitor Attachment

Use fasteners as specified by the monitor manufacturer to attach the monitor directly to the FSCT VESA Mounting Plate. (DETAIL A)

Monitor Attachment with Adaptor Plate

Secure the Adaptor Plate to the FSCT VESA Mounting Plate with the provided hex bolts, nuts, and washers. (DETAIL B). Refer to the specific Adaptor Plate instructions to attach the adaptor plate to the monitor.

Monitor Attachment with Adaptor Plate

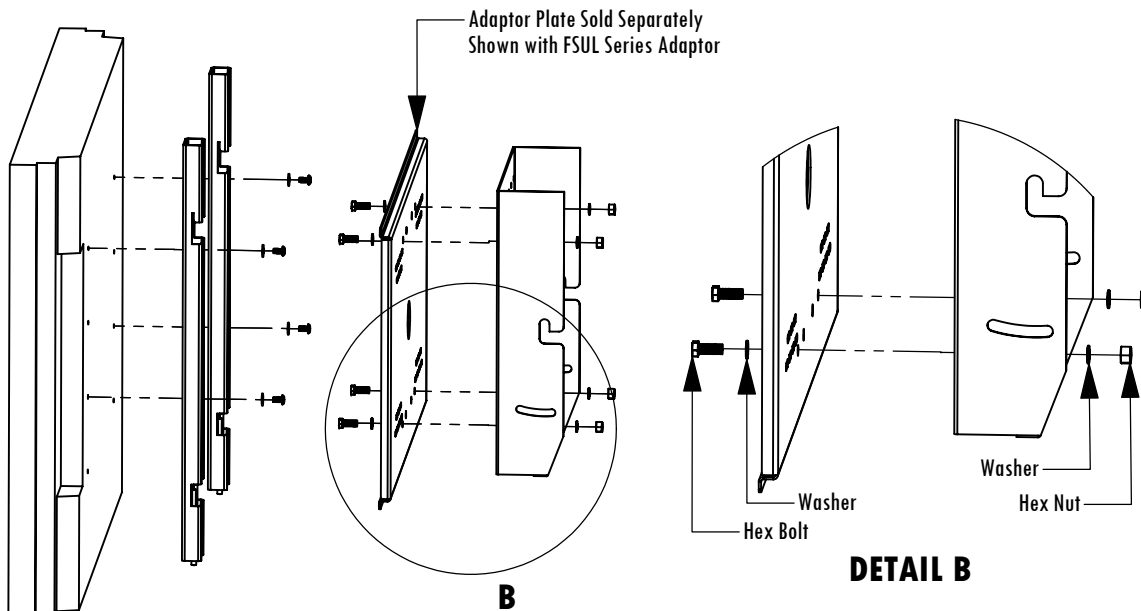

Hardware List

3/8-16 x 3/4" Hex Bolt, Black	2		
1/2-13 Nylock Nuts, Black	2		
5/16-18 x 3/4" Hex Bolts, Black	4		
5/16" Flat Washers, Black	8		
5/16-18 Hex Nuts, Black	4		
4mm x 25mm Set Screws ...	4	4mm Hex Nuts ...	8
5mm x 30mm Set Screws ...	4	5mm Hex Nuts ...	8
6mm x 30mm Set Screws ...	4	6mm Hex Nuts ...	8
4mm x 12mm Phillips Screws ...	4	5mm Flat Washers ...	12
5mm x 12mm Phillips Screws ...	4	1/4" Flat Washers ...	12
6mm x 12mm Phillips Screws ...	4		

