

# MAXUS™

EX55803V

## 5.0HP<sub>RUNNING</sub> 80 Gallon Air Compressor

**TWO  
STAGE**


High Output  
3 Phase Motor

Pre-wired for 240 volt

CAST IRON oil-lubricated  
TWO STAGE pump

Oil sight gauge

80 gallon ASME Code tank

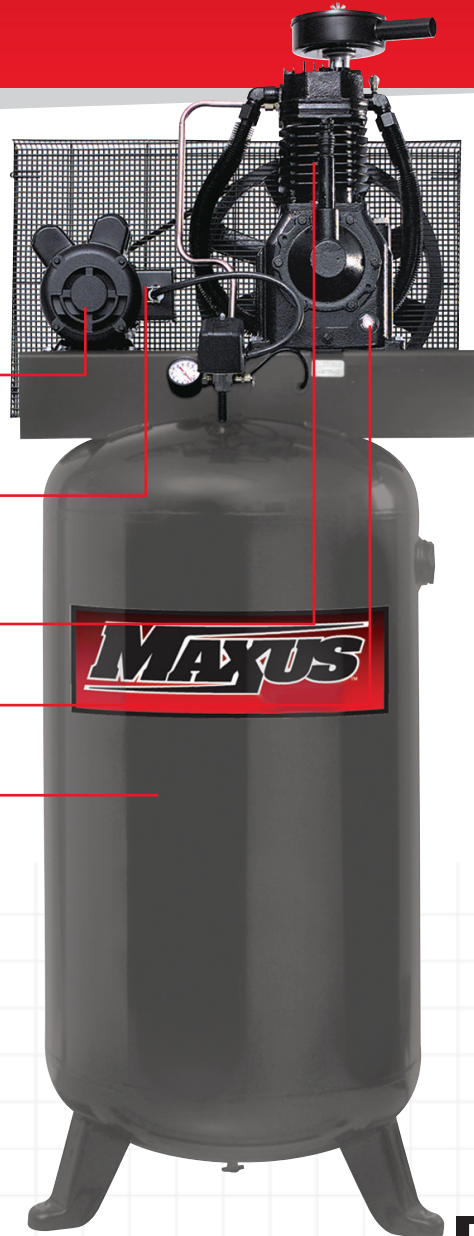

### FEATURES

### BENEFITS

Rugged CAST IRON  
two cylinder pump

High Output  
3Phase Motor

Oil-lubricated pump

Durable 80 gallon  
ASME code tank

- Up to 10,000 hours of extended life\*. Over 35% quieter and 60<sup>o</sup> cooler than aluminum pumps with cast iron cylinder sleeves
- Designed for heavy-duty environments such as automotive body shops and production air tool applications
- A traditional design that is quieter and longer lasting
- 80 gallon vertical, space saving tank design



\* Based on B10 bearing rating

### PRODUCT SPECIFICATIONS

UPC Information: 0-45564-61396-9

Item	HP Running	Tank Capacity	SCFM @ 90 PSI	SCFM @ 175 PSI	Amps	Weight	Voltage	Max. PSI
EX55803V	5.0	80 Gallons	14.3	14.1	21	460 lbs	240	175

MAXUS • 100 Production Dr. • Harrison, OH 45030 • 513-367-4811 FAX: 513-367-3176 • Copyright © 2005 MAXUS

EX55803V 0405