

# Cold Cathode Accent Light

## Installation instructions for 025-0001


**WARNING:** These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with the owners manual, current electrical codes and/or the current National Electric Code (NEC).

### IMPORTANT SAFETY INSTRUCTIONS

1. This product should not be modified in any way. If any modifications are made, it will void the warranty and may render the product unsafe.
2. Do not connect any other electrical appliance to this lamp or power supply and do not connect the fixture to any sort of appliance.
3. The Cold Cathode Accent Light must be used with a 12V DC power supply from American Lighting. Multiple fixtures may be linked to a single power supply only up to the maximum wattage capacity listed on the power supply. Refer to chart below for maximum number of fixtures that can be linked together.

Item Number	Maximum number of fixtures allowed	
	025-0002 (7.2 watt capacity)	025-0003 (18 watt capacity)
025-0001 (5 watts each)	1	3

Figure 1

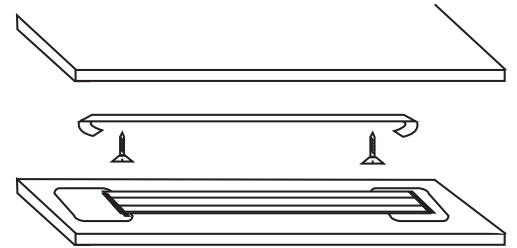

### MOUNTING INSTRUCTIONS

1. Locate desired position for the light.
2. Mark the position of mounting holes for each mounting clip.
3. Attach mounting clips using enclosed screws. See Figure 1.
4. Snap or slide the light into the clips. Handle with care to avoid damaging the fixture or breaking the bulb. Make sure that there are no wires or cables between the light and the mounting surface.


### For two or three fixtures

5. Multiple fixtures, up to three, can be linked together using the included in-line connector or the 12" linking extension. Both are included with the fixture.
6. Follow steps 1-4 above for subsequent lights, making sure in advance that the locations of the lights are close enough together to allow the linking extension or the inline connector to reach each of them.
7. Connect the fixtures to each other with either the inline connector or the 12" linking extension. See Figure 2.
8. Connect power cord to the side of the fixture by pushing DC jack into the first fixture's power outlet.
9. Plug 12V DC power supply's power cord into 120-volt AC wall outlet. Note: This light is designed to be used with 12V DC power supply 025-0002 or 025-0003 (c/UL listed, sold separately). Use of any other power supply may damage the fixture(s) and void the warranty.


Figure 2




Plug-in Driver  
(025-0003)



Cold Cathode  
(025-0001)



Cold Cathode  
(025-0001)



Cold Cathode  
(025-0001)



AMERICAN LIGHTING  
BRIGHT IDEAS • INNOVATIVE PRODUCTS

www.americanlighting.com