American Standard

"Standard" COLLECTION by American Standard

Standard Collection
BATHING POOL
HIGH GLOSS ACRYLIC

Standard Collection BATHING POOL with INTEGRAL APRON

- ❑ **2083.102 Bathing Pool, Right Hand Outlet**
- ❑ **2083.202 Bathing Pool, Left Hand Outlet**

Product Features:
- Acrylic with fiberglass reinforcement
- Integral apron design
- Integral three-sided, tiling/water retention flange
- Generous back rest
- End drain outlet
- Design coordinated to the Standard Collection of accessories, faucets and fixtures

Nominal Dimensions:
(60" x 32" x 20") 1524 x 813 x 508mm

To Be Specified - Required:

- ❑ Color: (White only)
- ❑ Bath Filler*: (specify finish)
- ❑ Drain: 1501.170 (specify Chrome or Satin)

To Be Specified - Optional:

- ❑ Bath Caddie: 9533.100 (in Chrome only)

For color/finish availability and other faucet choices, please see the Product Selector and Pricing Guide.

Compliance Certifications -
Meets or Exceeds the Following Specifications:
- Underwriters Laboratories - Hydromassage Bathtubs UL 1795
- ASME A112.19.7M for Whirlpool Appliances
- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

GENERAL SPECIFICATIONS FOR 2083 BATHING POOL

INSTALLED SIZE	60 x 32 x 20 In. (1524 x 813 x 508mm)
WEIGHT	100 Lbs. (45 Kg.)
WEIGHT w/WATER	551 Lbs. (250 Kg.)
GAL. TO OVERFLOW	54 Gal. (204 L)
BATHING WELL AT SUMP	18 x 42 In. (457 x 1067mm)
BATHING WELL AT RIM	25 X 54 In. (635 x 1372mm)
WATER DEPTH TO OVERFLOW	14 In. (356mm)
FLOOR LOADING (PROJECTED AREA)	41 Lbs./Sq.Ft. (202 Kgs./Sq.m)
PTS.	20.8
CUBE (FT^3)	35.3

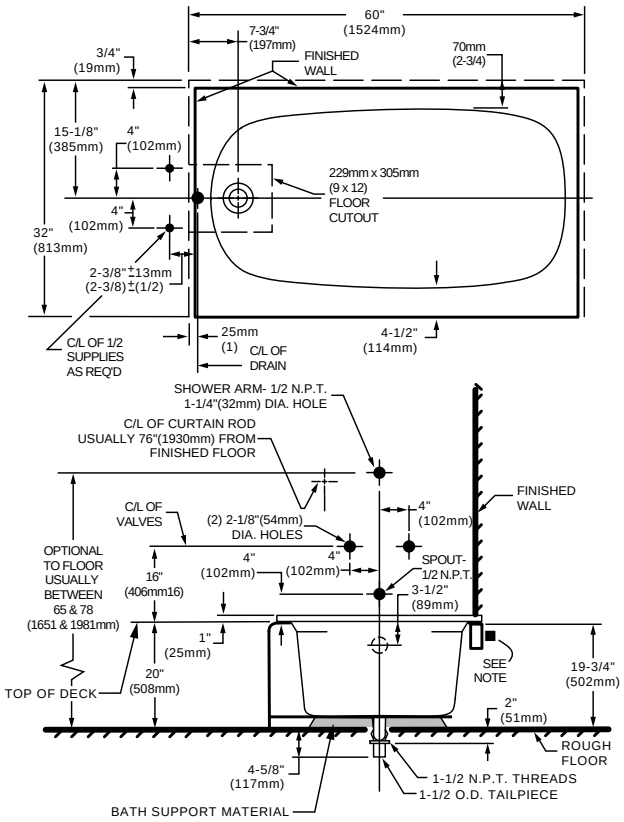

NOTES:

BATH TO BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION.

BATH TO BE INSTALLED ABOVE FLOOR LINE AS A RECESS INSTALLATION.

LEFT HAND OUTLET SHOWN, RIGHT HAND REVERSE DIMENSIONS (2083.202).

FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY.

PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standards Z124.1 and A112.19.7. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided pages.

© 2003 American Standard Inc.