

American Standard



CULINAIRE™

SINGLE CONTROL KITCHEN FAUCET with PULL OUT SPRAY

MODEL NUMBER:

4147.100 Pull Out Faucet

Brass body with pull out spray. Escutcheon plate (installation is optional).

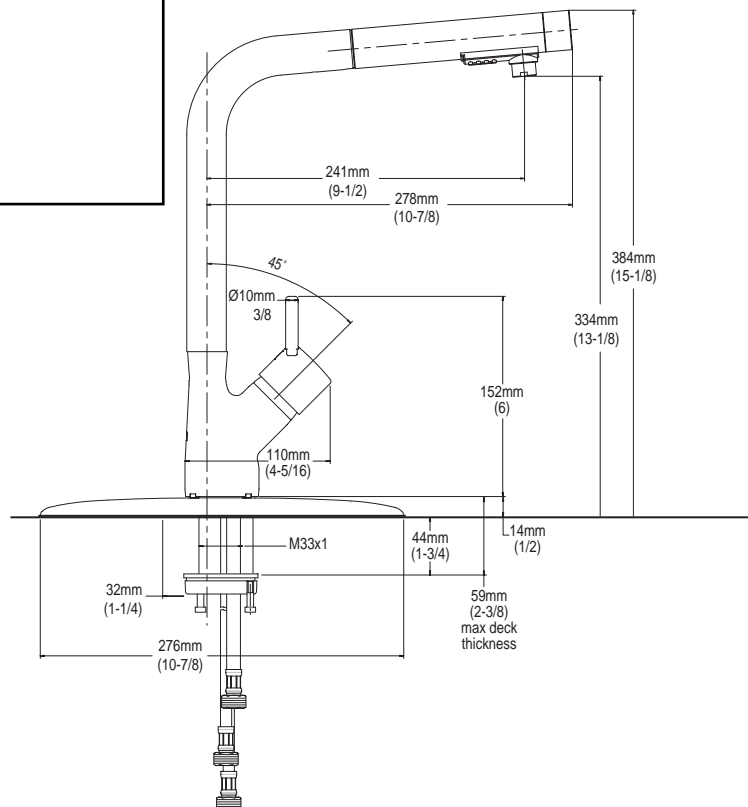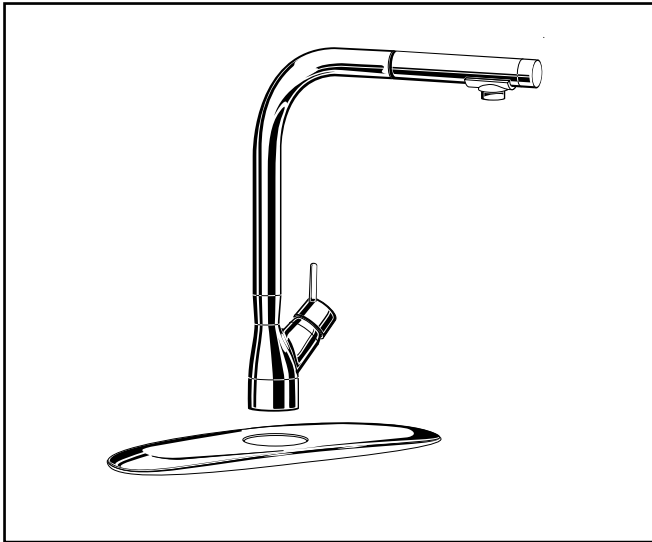

GENERAL DESCRIPTION:

Forged brass body with brass swivel spout and stamped brass escutcheon. Pull-out swivel spray spout. Nylon reinforced hose is 6ft long. Washerless 35mm ceramic disc valve cartridge with hot limit safety stop. 3/8" O.D. copper supplies with 1/2" male threaded adaptors and nuts. 2.2 gpm/8.3L/min. maximum flow rate. Fitting can be mounted with or without supplied escutcheon plate (escutcheon size 10-7/8"L x 2-1/2"W x 9/16"H). Faucet can be right or left hand mounted.

PRODUCT FEATURES:

Ceramic Disc Valve Cartridge: Assures smooth, precise valve control and a lifetime of drip-free, maintenance-free performance.

Brass and Copper Waterway: Highest quality materials for durability & long life.

Memory Position Valving: Allows user to turn valve on and off at preferred temperature setting without readjusting handle position each time.

Low Lead: Meets Prop 65 lead requirements.

Pull-out Spray: Adjustable spray patterns - stream to spray.

Larger Spout: Increased height, reach and diameter.

Choice of Finishes: Available in Polished Chrome and Stainless Steel (PVD).

SUGGESTED SPECIFICATION:


Single control kitchen faucet shall feature a forged brass body with pull-out spray. Shall also feature washerless ceramic disc valve cartridge. Fitting shall be American Standard Model # 4147.100._____

SINGLE CONTROL KITCHEN with PULL OUT SPRAY FAUCET


CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ANSI A117.1
ASME A112.18.1
CSA B125

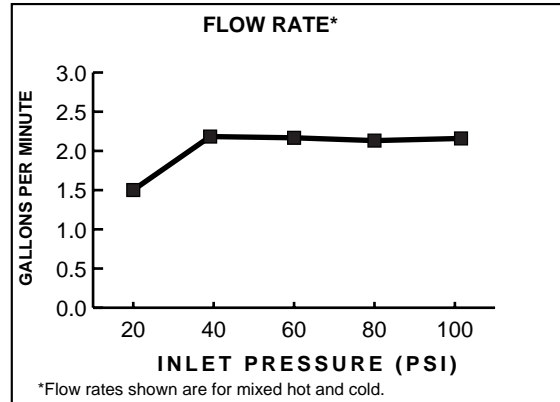

Product Number	Description	Finish Options	
		Polished Chrome	PVD Stainless Steel
		002	075
4147.100	Hi flow faucet with pull out spray and hose. 3/8" copper inlets with 1/2" male threaded connectors and nuts.		

 Meets the American Disabilities Act Guidelines and **ANSI A117.1** Requirements for the physically challenged.