

B-722T

ASSEMBLY INSTRUCTIONS

Note: One person can assemble this unit.



Bell'O International Corporation



711 Ginesi Drive • Morganville, NJ 07751-1235

Customer Service: (888) 235-7646

E-mail: support@bello.com • Web: www.bello.com

LIST OF SUPPLIED HARDWARE

1 x		Ordering part # CHFE 003 Item # ALLEN KEY
8 x		Ordering part # VTAC 194 Item # 8
4 x		Ordering part # PDPL 009 Item # 3
8 x		Ordering part # PDPL 021 Item # 9

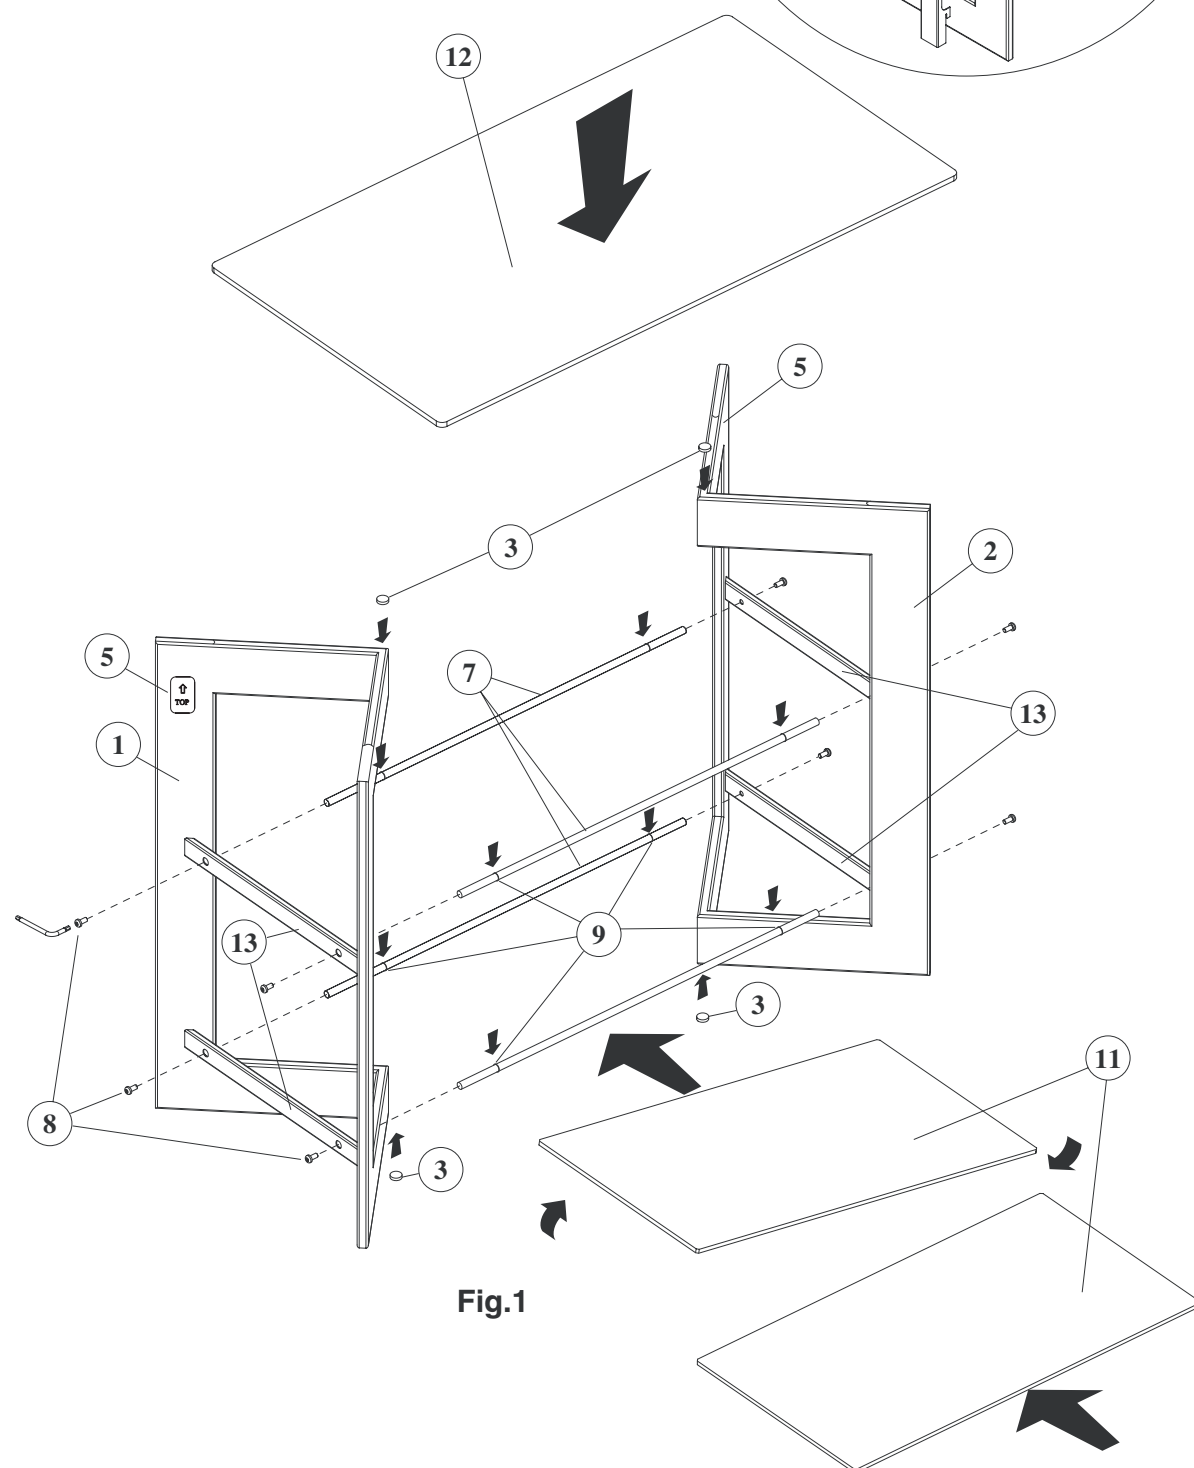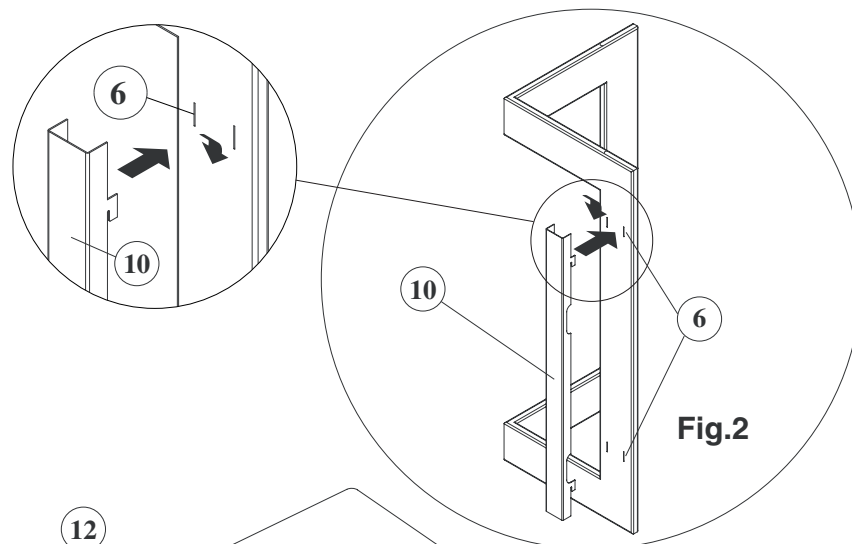

A. **REMOVE** the left side frame (1) and the right side frame (2) from the box and place the two frames on the floor so that the two sides are resting flat.

B. **APPLY** the four supplied large rubber glass pads (3) onto the top and bottom frame inside corners of the left frame (1) and right frame (2) as shown in Fig. 1.

Note: When facing the two side frames, the LEFT frame (1) will have the CMS® (Cable Management System) slots (6) face the LEFT outside rear side of the frame and the "TOP" sticker facing toward the front and affixed on the top inside rear of the frame as shown. The RIGHT frame (2) will have the CMS® slots (6) facing the outside RIGHT rear of the frame and the "TOP" sticker facing toward the front and affixed on the top inside rear of the frame.

C. **STAND** both frames upright with the closed "V" of each frame facing each other and toward the center of the unit, and place them approximately 36" apart.

Note: The two "TOP" stickers affixed on the inside rear of each side frame should be facing forward as shown in the assembly diagram. These stickers can be removed after assembly.

D. **APPLY** two of the eight supplied small rubber O-rings (9) onto the ends of each of the four glass shelf support rods (7) where indicated in Fig. 1.

E. **ALIGN** each end of two of the four supplied shelf support rods (7) with the lower pre-drilled holes of the frame crossbars (13) and **INSERT** a screw (8) through the lower pre-drilled holes on both of the crossbars (13) and into the shelf support rod ends. **SECURE** the screws using the supplied Allen wrench. **REPEAT** this procedure for the remaining two upper crossbar rods (7) as shown in Fig. 1. **TIGHTEN ALL EIGHT SCREWS (8) FULLY.**

F. **POSITION** the furniture in the location it will occupy in the room when fully assembled and in use.

G. Facing the assembled furniture, and starting with the middle shelf, **CAREFULLY TILT** one of the two supplied smaller glass shelves (11) and, from the **FRONT** of the unit, **CAREFULLY INSERT** it onto the two center glass shelf support rods (7) as shown in Fig. 1. **REPEAT** the same procedure for the remaining smaller bottom glass shelf (11).

H. **CAREFULLY CENTER** and **PLACE** the large top glass shelf (12) onto the top of the assembled furniture as shown in Fig. 1. Position the CMS® channel (10) on either the right side frame (2) or the left side frame (1), inserting it into the four vertical slots located on the rear of each side frame, and pushing it down as shown in Fig. 2.

IMPORTANT: REMOVE ALL GLASS, TV AND OTHER EQUIPMENT FROM THE FURNITURE PRIOR TO MOVING THE ASSEMBLED UNIT.

DO NOT ATTEMPT TO MOVE THE ASSEMBLED FURNITURE AFTER THE GLASS SHELVES HAVE BEEN INSTALLED, AND/OR WHEN THERE IS EQUIPMENT LOCATED ON THE FURNITURE AS THIS MAY CAUSE THE SHELVES TO BECOME UNSECURED AND FALL. MAKE SURE THAT THE FRONT OF THE TV IS POSITIONED A FEW INCHES BACK FROM THE FRONT OF THE TOP GLASS. WHEN IN USE, THIS FURNITURE MUST BE PLACED ON A FLAT AND LEVEL SURFACE.

ALWAYS PLACE THE HEAVIEST EQUIPMENT ON THE BOTTOM SHELF.