

# INSTALLATION INSTRUCTIONS

## UNIVERSAL CEILING MOUNT

### CMA-365

The Universal Ceiling Mount is designed for ease of installation with any height of ceiling. By using any length of standard NPT 1½" pipe threaded both ends, you can extend the height capabilities to meet your needs.

**WARNING: IMPROPER INSTALLATION MAY RESULT IN SERIOUS PERSONAL INJURY!**

When mounting Chief Manufacturing accessories, the structural system and mounting method **MUST** be capable of supporting 5 times the combined weight of the total installation.

Unpack and check contents:

- |  |                       |
|--|-----------------------|
| (1) Truss Ceiling Mounting Plate CMA-365 | (4) 3/8" Washer, Flat |
| (1) 1/4"-20 X 3/8" Allen Set Screw       | (4) 3/8"-16 Nut, Hex  |
| (2) 3/8"-16 U-Bolt                       |                       |

1. Place two u-bolts onto supporting structure (pipe, truss beam, ceiling joist, etc.) (see Figure 1).
2. Install mounting plate by aligning and insert two u-bolts through four corner mounting holes (NOTE: The notch on the flanges run along the length of the beam).
3. Secure the mounting plate using four 3/8"-16 nuts and washers, making sure the plate is level prior to tightening nuts.
4. Install extension pipe in coupler and secure using the 1/4"-20 X 3/8" set screw.

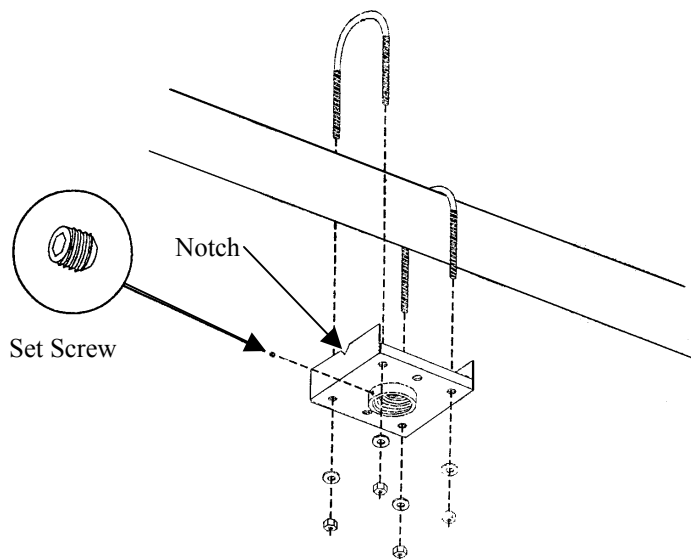


Figure 1. Ceiling Plate Assembly



CHIEF MANUFACTURING INC.  
1-800-582-6480 952-894-6280 FAX 952-894-6918  
12800 HIGHWAY 13 SOUTH, SUITE 500  
SAVAGE, MINNESOTA 55378 USA

8803-00023  
2002 Chief Manufacturing  
[www.chiefmfg.com](http://www.chiefmfg.com)  
03/02