INSTALLATION INSTRUCTIONS

CEILING PLATES

CMA-101

The Ceiling Plate is designed for ease of installation with any height of drop ceiling. By using any length of standard NPT 1½" pipe threaded both ends, you can extend the height capabilities to meet your needs.

WARNING: IMPROPER INSTALLATION MAY RESULT IN SERIOUS PERSONAL INJURY!
When mounting Chief Manufacturing accessories, the structural system and mounting method **MUST** be capable of supporting 5 times the combined weight of the total installation.
The maximum weight to be installed on the ceiling plate is 500 pounds (226.8 Kg).

Unpack and check contents:

(1) 4" Flat Ceiling Plate CMA-101
(1) 5/16-18 X 3/8" Socket Set Screw
(1) 5/16-18 X 3/8" Security Set Screw
(1) 5/32" Hex Wrench

1. Securely install the ceiling plate to the ceiling joists. **(SEE WARNING ABOVE)**
   Bolthole spacing is shown on Figure 1. NOTE: If using only two holes for mounting, you must use opposing holes.
2. Thread your standard NPT 1½" pipe into coupler, tighten securely.
3. Install and securely tighten the 5/16-18 X 3/8" socket set screw or, if desired, security set screw.
4. Follow the Ceiling Mount Instructions for mating components or mounts.

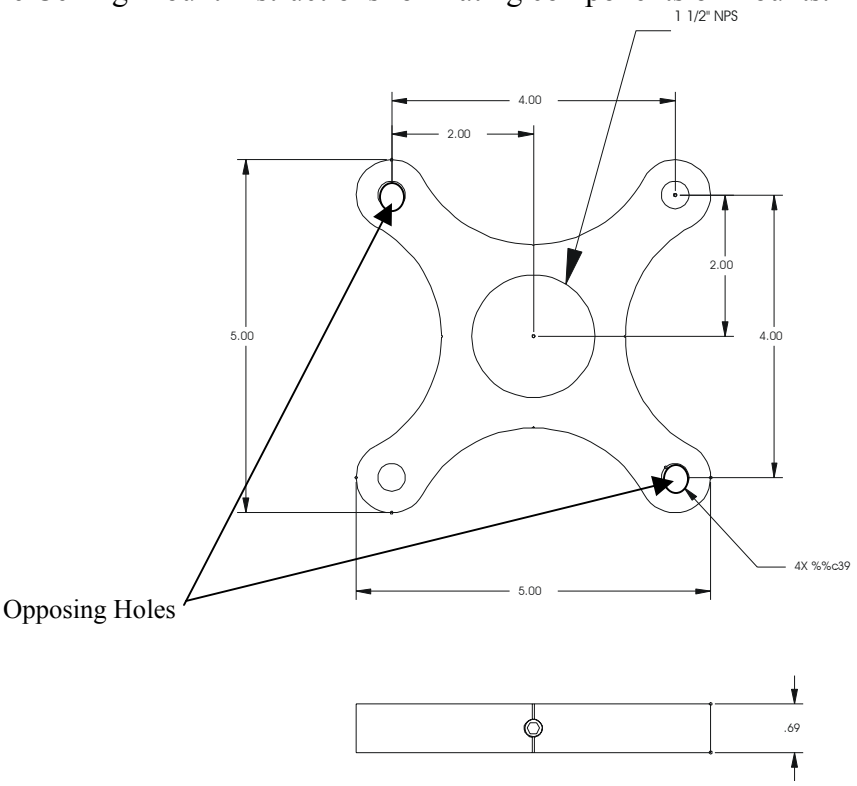

Figure 1. CMA-101 Dimensions

CHIEF MANUFACTURING INC.
1-800-582-6480 952-894-6280 FAX 952-894-6918
12800 HIGHWAY 13 SOUTH, SUITE 500
SAVAGE, MINNESOTA 55378 USA

8803-000040

2004 Chief Manufacturing

www.chiefmfg.com
01/04