

Submitted Model No.: _____
 Specific Features: _____



PERSONAL HAND HELD SHOWERS

- 69" (1753 mm) Plastic Hose
- Certified Dual Check Valves
- 24" Wall Bar, Wall Mount or Shower Arm Mount

<p>54713</p> <p>69" (1753 mm)</p> <p>24" (610 mm)</p> <p>Accepts 1/2" - 14 NPSM Male</p>	<p>56713</p> <p>69" (1753 mm)</p> <p>24" (610 mm)</p> <p>Accepts 1/2" - 14 NPSM Male</p>	<p>55710</p> <p>69" (1753 mm)</p> <p>24" (610 mm)</p> <p>Accepts 1/2" - 14 NPSM Male</p>
<p>54613</p> <p>69" (1753 mm)</p>	<p>56613</p> <p>69" (1753 mm)</p>	<p>54510</p> <p>69" (1753 mm)</p> <p>Accepts 1/2" - 14 NPSM Male</p>
<p>54513</p> <p>69" (1753 mm)</p> <p>Accepts 1/2" - 14 NPSM Male</p>	<p>56513</p> <p>69" (1753 mm)</p> <p>Accepts 1/2" - 14 NPSM Male</p>	<p>56510</p> <p>69" (1753 mm)</p> <p>Accepts 1/2" - 14 NPSM Male</p>




COMPLIES WITH:
 ■ ASME A1 12.18.1/CSA B125.1 ◆

STANDARD SPECIFICATIONS:

- ABS hand held shower with one or three spray patterns – not a positive shut-off.
- 69" (1753 mm) flexible plastic hose.
- Certified dual check valves.
- 24" (610 mm) wall bar with adjustable slide (allows for adjustable shower height) - 54713, 55710 and 56713 only. Not to be used as a Grab Bar. Not ADA compliant.
- Wall mount bracket - 54510, 54513, 56510 and 56513 only.
- Shower Mount Bracket - 56613 and 54613.
- 2.5 gpm @ 80 psi (9.5 L/min @ 552 kPa)

◆ Your Delta Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A1 12.18.3, CSA B125 and ASME A1 12.18.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

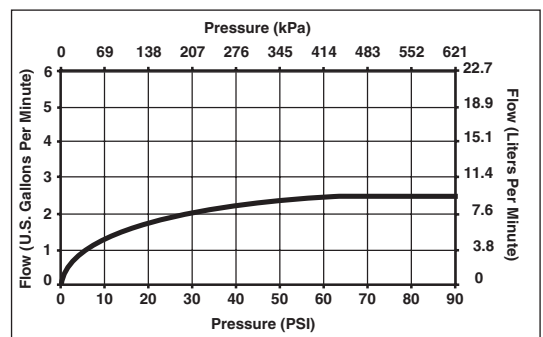

Standard Features	54510	54510-SS	54513	54513-PB	54513-PT	54513-RB	54513-SS	54613	54613-PT	54613-RB	54613-SS	54713	54713-PB	54713-PN	54713-PT	54713-RB	54713-SS	55710	55710-SS	56510	56513	56513-NN	56513-SS	56613	56613-SS	56713	56713-NN	56713-SS	
Matched Finish ABS Hand Held Shower - Not a Positive Shut-Off	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
One Spray Pattern	◆	◆																◆	◆	◆									
Three Spray Patterns			◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆				◆	◆	◆	◆	◆	◆	◆	◆	◆
Matched Finish 69" (1753 mm) Flexible Plastic Hose	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Certified Dual Check Valves	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
24" (610 mm) Matched Finish Wall Bar with Adjustable Slide (allows for adjustable shower height). Not To Be Used As A Grab Bar. Not ADA Compliant.												◆	◆	◆	◆	◆	◆	◆	◆								◆	◆	◆
Matched Shower Arm Mount								◆	◆	◆	◆													◆	◆				
Matched Finish Wall Mount Hand Held Shower Bracket	◆	◆	◆	◆	◆	◆	◆													◆	◆	◆	◆						
2.5 gpm @ 80 psi (9.5 L/min @ 552 kPa)	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆	◆
Aged Pewter Finish					◆				◆						◆														
Chrome Finish	◆		◆					◆				◆						◆		◆	◆			◆		◆			
Brilliance® Pearl Nickel Finish																							◆					◆	
Brilliance® Polished Brass Finish				◆									◆																
Brilliance® Polished Nickel Finish														◆															
Brilliance® Stainless Finish		◆					◆				◆						◆		◆				◆		◆				◆
Venetian Bronze Finish						◆				◆						◆													◆


Available Options for Field Conversion:
Note: Wall Bar Not To Be Used As Grab Bar.



50560 (Available in chrome, NN, PB, PN, PT, RB & SS)
 • 90° Wall supply elbow & flange, 1/2" IPS Female Inlet and 1/2" - 14 NPSM Male Threaded Outlet.




50650 (Available in chrome, NN, PB, PN, PT, RB & SS)
 • Brass Shower Arm Diverter.




RP3914
 • Chrome Plated Pull-Up Diverter Spout (for hand shower only or tub and hand shower only applications), for 1/2" or 3/4" IPS.

Spray Patterns



Massage Spray



Full Spray



Aerated Soft Spray



Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2005 Masco Corporation of Indiana