



DYNAPAC

LP6500

Vibratory Double Drum Pedestrian Roller



Technical data

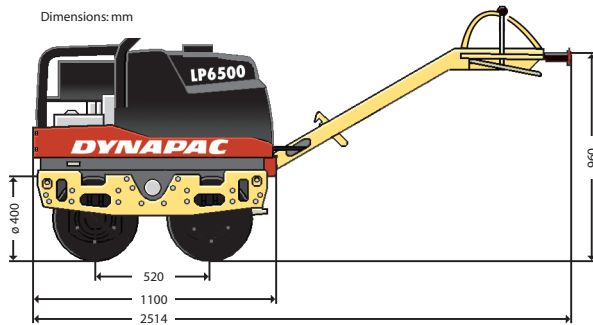


Weight	Electrical start	Manual start
Net weight, kg	678	658
Operating weight CECE, kg	716	696

Engine		
Manufacturer	Hatz	Hatz
Type	1D50S	1D50S
Starting system	Electrical start	Crank
Fuel	Diesel	Diesel
Output kW/rpm	6,8/2600	6,8/2600
Fuel tank capacity, l	5	5
Fuel consumption, l/h	1,35	1,35


Compaction		
Static linear load, kg/cm	5.5	5.35
Speed forward, km/h	0-3,6	0-3,6
Speed reverse, km/h	0-2,3	0-2,3
Gradeability, %	35	35
Drive system	Fully hydraulic	Fully hydraulic
Frequency, Hz/rpm	61/3660	61/3660
Amplitude, mm	0,45	0,45
Centrifugal force, kN	21	21

Sprinkler system		
Tank capacity, l	71	71
Type of sprinkling	Gravity	Gravity

Asphalt compaction capacity

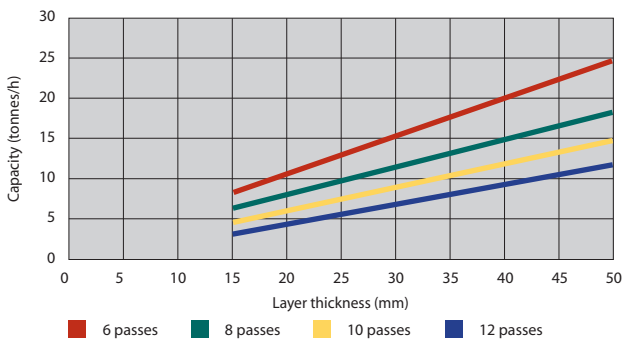

Compaction data

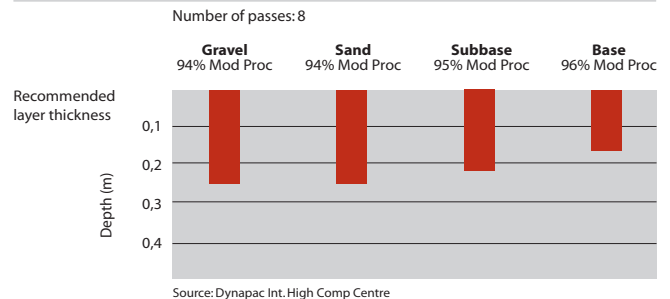

Dynapac Compaction Equipment AB, Box 504, SE-371 23 Karlskrona, Sweden, Tel: +46 455 30 60 00, Fax: +46 455 30 60 30

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

www.dynapac.com