


The Edgewood® Series

TF600/700/900 Series Fans



SPECIFICATION SHEET

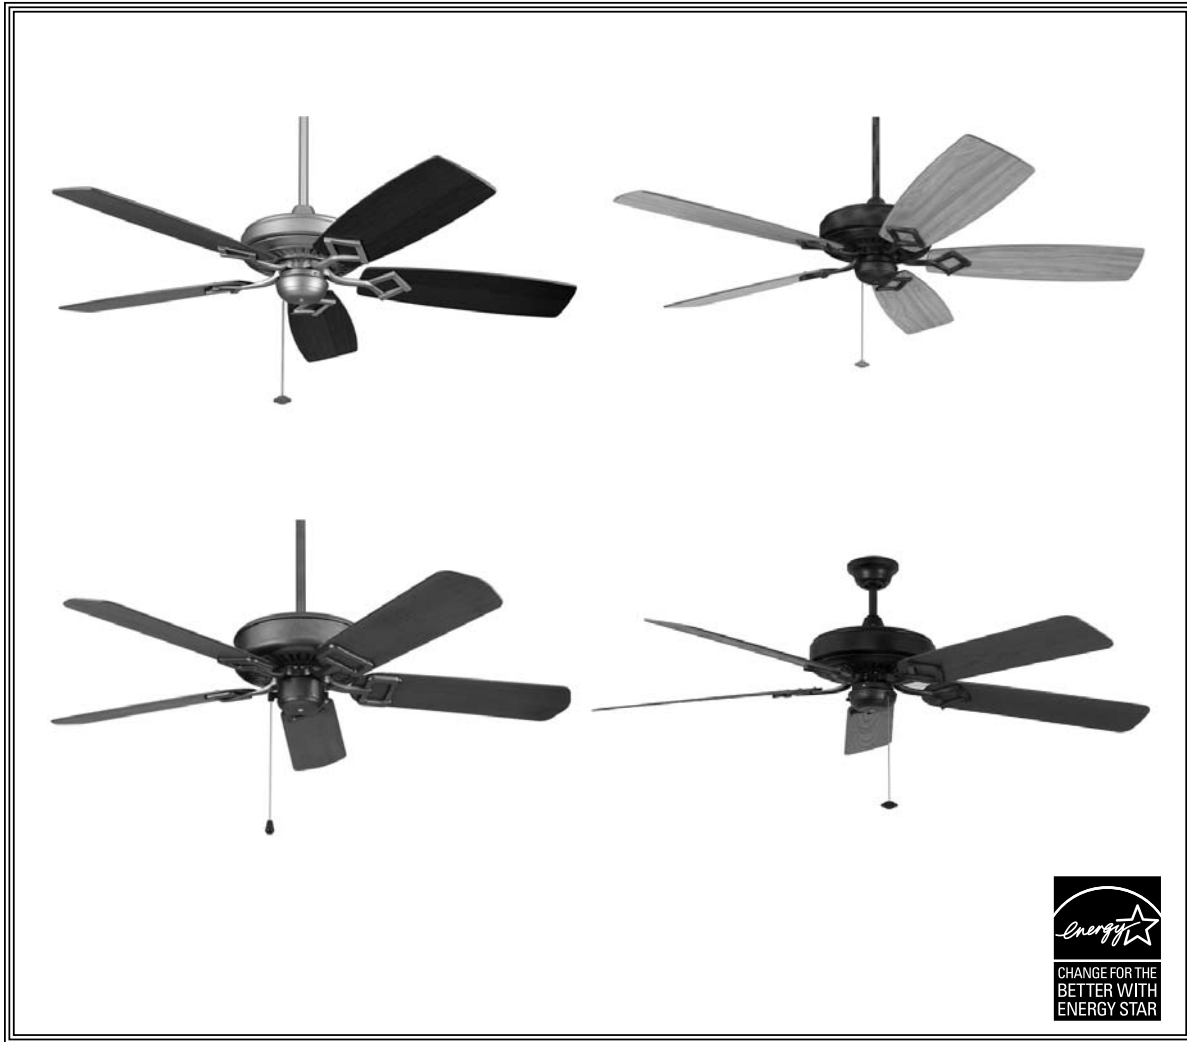

celebrating 25 years


Product Specifications subject to change

Decorative / Deluxe Models



Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	205	6876	80	0.73	87
Med	126	4309	119	0.48	36
Low	72	2020	173	0.27	12

DECORATIVE – TF600**	
Electrical Requirements	120 VAC, 60 Hz, 15 amp circuit
Fan Motor; Energy Star Rated	188 x 20
Blade Sweep / Pitch	52" / 14°
Dimension (w/4½" DR)	13¾" from ceiling to switch cup
	10¼" from ceiling to blade edge
Fan Controls (*Options)	Pull chain and reverse switch
3-Speed, Reversible - RPM	High—190; Med—115; Low—60
Blades, Reversible (A set of 5)	Traditional wood—included
Down Light Kit / Glass	Optional—sold separately
Net Hanging Weight	21 lbs
Location Use	Dry location rated only
Available Unpacked Finishes	
Fan / Housing Assembly	Blades - Traditional
SN – Satin nickel	Walnut / light walnut
TS – Tortoise shell	Walnut / light walnut
WH – White	White / white oak

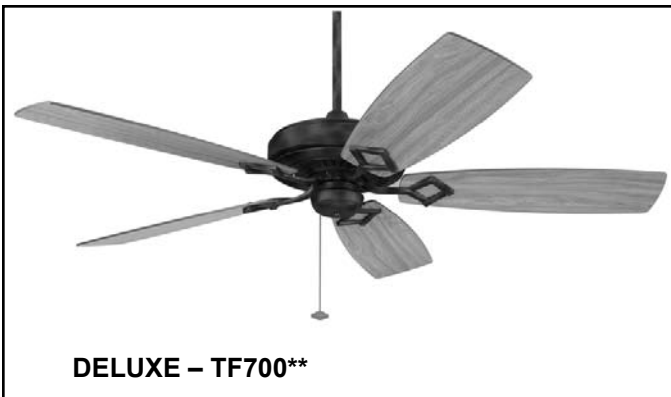

Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	143	7893	96	0.69	82
Med	94	4751	125	0.47	38
Low	54	2566	173	0.29	15

DELUXE – TF700**	
Electrical Requirements	120 VAC, 60 Hz, 15 amp circuit
Fan Motor; Energy Star Rated	212 x 25
Blade Sweep / Pitch	60" / 16°
Dimension (w/4½" DR)	14.6" from ceiling to switch cup
	13" from ceiling to blade edge
Fan Controls (*Options)	Pull chain and reverse switch
3-Speed, Reversible - RPM	High—140; Med—90; Low—50
Blades, Reversible (A set of 5)	Traditional wood—included
Down Light Kit / Glass	Optional—Sold Separately
Net Hanging Weight	29 lbs
Location Use	Dry location rated only
Available Unpacked Finishes	
Fan / Housing Assembly	Blades - Traditional
SN – Satin Nickel	Walnut / light walnut
TS – Tortoise Shell	Walnut / light walnut
WH – White	White / white oak

***FAN CONTROL OPTIONS—sold separately:**

Optional C1 and C2 wall controls and C4 remote control with canopy-style receiver unit available. Instructions are provided with each control.



*Fans are rated for dry locations only
Product Specifications subject to change*

Wet Location Model



Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	188	5570	92	0.51	61
Med	137	3698	122	0.37	30
Low	50	1955	176	0.22	11

WET LOCATION – TF900**	
Electrical Requirements	120 VAC, 60 Hz, 15 amp circuit
Fan Motor; Energy Star Rated	188 x 12
Blade Sweep / Pitch	50" / 14°
Dimension (w/4½" DR)	13.6" from ceiling to switch cup
	11.7" from ceiling to blade edge
Fan Controls (*Options)	Pull chain and reverse switch
3-Speed, Reversible - RPM	High—185; Med—125; Low—70
Plastic Blades (A set of 5)	Traditional wood style—included
Down Light Kit / Glass	Optional—sold separately
Net Hanging Weight	18 lbs
Location Use	Fan rated for dry, damp and wet
Available Unpacked Finishes	
Fan / Housing Assembly	Blades - Traditional
AW – Antique White	Antique white
AZ – Aged Bronze	Dark cherry
SN – Satin Nickel	Light cherry
WH – White	White



Airflow / Energy Efficiency Info (120V)					
Fan Speed	Max RPM	CFM	CFM / Watts	Amps	Watts
High	141	9173	94	0.70	97
Med	95	5985	130	0.48	46
Low	43	3311	171	0.22	19

WET LOCATION – TF970**	
Electrical Requirements	120 VAC, 60 Hz, 15 amp circuit
Fan Motor; Energy Star Rated	212 x 25
Blade Sweep / Pitch	60" / 16°
Dimension (w/4½" DR)	13.6" from ceiling to switch cup
	11.7" from ceiling to blade edge
Fan Controls (*Options)	Pull chain and reverse switch
3-Speed, Reversible - RPM	High—155; Med—105; Low—45
Plastic Blades (A set of 5)	Dark cherry—included
Down Light Kit / Glass	Optional—sold separately
Net Hanging Weight	32 lbs
Location Use	Fan rated for dry, damp and wet
Available Unpacked Finishes	
Fan / Housing Assembly	Blades - Traditional
TS – Tortoise shell	Dark cherry, painted

***FAN CONTROL OPTIONS (Dry Applications Only):**

Optional C1 and C2 wall controls and C4 remote control with canopy-style receiver unit available. Instructions are provided with each control.



*Fans are rated for dry, damp and wet locations
Product Specifications subject to change*



Copyright 2009 Fanimation, Inc.

**10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215
Outside U.S. call (317) 733-4113
Visit Our Website www.fanimation.com**



2009/01