


The Belleria[®]

FP4320 Series




SPECIFICATION SHEET

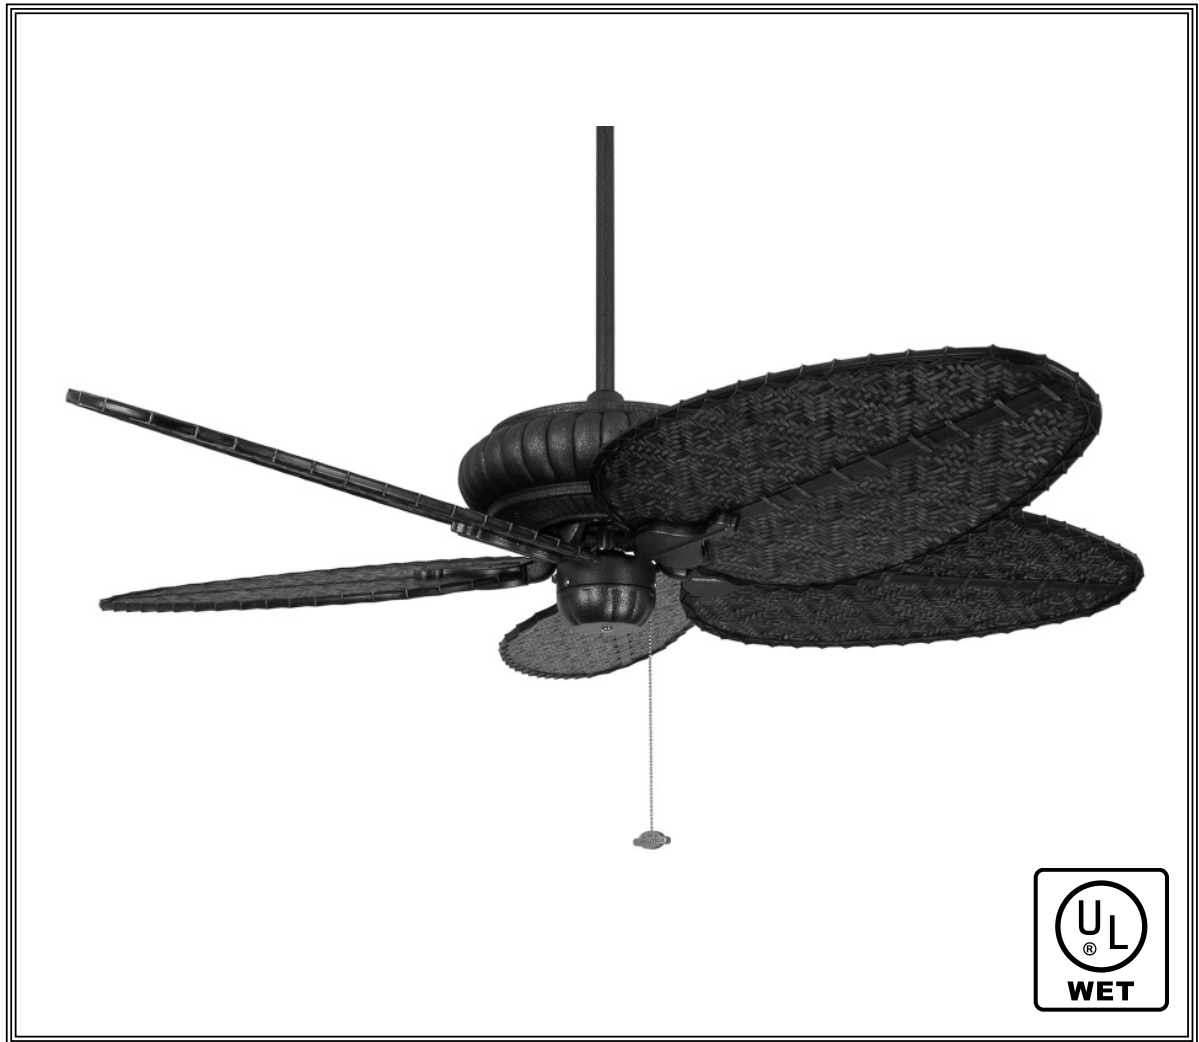

Product Specifications subject to change

The Belleria® Fan Assembly – FP4320**

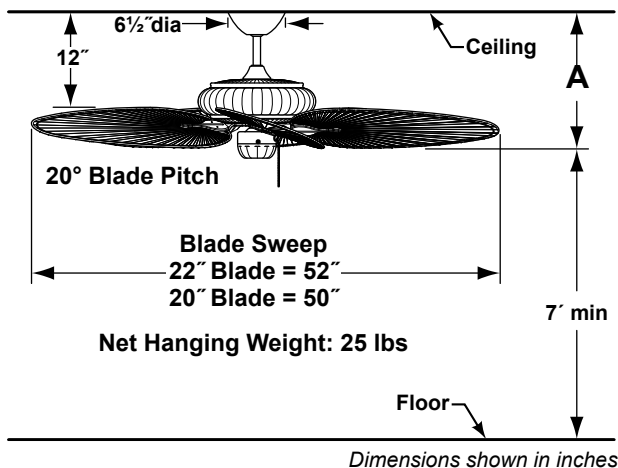

| **Available Finishes | |
|----------------------|----------------|
| AG | Aged Copper |
| AN | Antique Nickel |
| AZ | Aged Bronze |
| LT | Latte |
| MW | Matte White |
| TB | Textured Black |
| TS | Tortoise Shell |

| Distance from Ceiling to Edge of Blade | A |
|--|-----|
| Fan w/6" downrod | 15" |
| Fan w/12" downrod | 21" |
| Fan w/18" downrod | 27" |
| Fan w/24" downrod | 33" |
| Fan w/36" downrod | 45" |
| Fan w/48" downrod | 57" |
| Fan w/60" downrod | 69" |
| Fan w/72" downrod | 81" |

| Available Plastic Blades | | |
|--------------------------|---------|-------------------------------|
| Palm Leaf | BPP1 | Natural - 22" Wide Oval |
| Palm Leaf-Brown | BPP1BR | Painted - 22" Wide Oval |
| Palm Leaf | BPP4 | Natural - 22" Narrow Oval |
| Palm Leaf-Brown | BPP4BR | Painted - 22" Narrow Oval |
| Palm Leaf-Green | BPP4GR | Painted - 22" Narrow Oval |
| Woven Bamboo | BPD1A | Antique - 22" Wide Oval |
| Woven Bamboo | BPD4A | Antique - 22" Narrow Oval |
| Woven Bamboo | BPD4MW | Matte White - 22" Narrow Oval |
| Woven Bamboo | BPD4BL | Black - 22" Narrow Oval |
| Traditional Wood | BPW10CY | Cherry - 20" Narrow |
| Traditional Wood | BPW10WO | Washed Oak - 20" Narrow |

INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

FAN SPEEDS:

3-speed pull-chain with reversing switch (on the motor). 1st Pull-High – 155 rpm; 2nd Pull-Med – 95 rpm; 3rd Pull-Low – 65 rpm (with BPW blades)

BLADE OPTIONS:

Wet-Location (Plastic - BP, BPD & BPW Series) Palm, Bamboo, and Wood blades are available (sold separately in sets of 5). See catalog or visit our website, www.fanimation.com for more information.

CONTROL OPTIONS (Dry Applications Only):

Optional controls are: C1 or C2 wall controls; C4 remote control with canopy receiver. Installation & operating instructions provided with each control.

LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a variety of four-light fixtures with a maximum of 240 watts. Some are water-sealed and UL wet location approved. See catalog or visit our website, www.fanimation.com for more lighting options.

DOWN ROD OPTIONS:

The Belleria® fan comes with a standard 6" wet-location down rod. Optional wet-location down rods are available in 12", 18", 24", 36", 48", 60", and 72". The Belleria® fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 6" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.

DAMP / WET LOCATION:

Fan rated for both Damp & Wet Location usage.



10983 Bennett Parkway
Zionsville, IN 46077
Toll Free (888) 567-2055
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website www.fanimation.com

