

# **The Extraordinaire™**

## **OF110 Series**




# **SPECIFICATION SHEET**



*Product Specifications Subject To Change*

# The Extraordinaire™ Fan – OF110\*\*

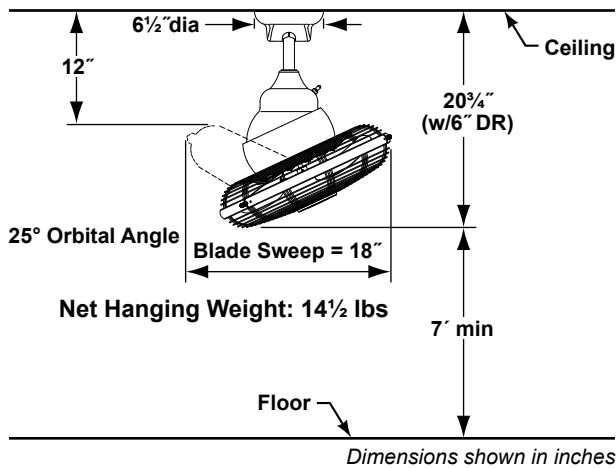

Available Finish	
OB	Oil-Rubbed Bronze
PW	Pewter
SN	Satin Nickel

Distance from Ceiling to Bottom of Fan	A
Fan w/6" downrod	20 <sup>3</sup> / <sub>4</sub> "
Fan w/12" downrod	26 <sup>3</sup> / <sub>4</sub> "
Fan w/18" downrod	32 <sup>3</sup> / <sub>4</sub> "
Fan w/24" downrod	38 <sup>3</sup> / <sub>4</sub> "
Fan w/36" downrod	50 <sup>3</sup> / <sub>4</sub> "
Fan w/48" downrod	62 <sup>3</sup> / <sub>4</sub> "
Fan w/60" downrod	74 <sup>3</sup> / <sub>4</sub> "
Fan w/72" downrod	86 <sup>3</sup> / <sub>4</sub> "

## INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

## ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit.

## FAN SPEEDS:

3 fan speeds (forward only) with rotary switch (on top of the motor). High – 1,270 rpm; Med – 1,050 rpm; Low – 725 rpm

## CONTROL OPTIONS:

The 3-speed fan-only wall control (CW110) is included.

## DOWNROD OPTIONS:

The Extraordinaire™ fan comes with a 1" Dia. x 6" (DR1-6) downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer downrod, a downrod coupler is available. The Extraordinaire™ fan can be mounted on a sloped ceiling up to 50°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Call tech support for more information.

## DAMP LOCATION:

Fan is not rated for Damp Location usage.



10983 Bennett Parkway  
Zionsville, IN 46077  
Toll Free (888) 567-2055  
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website [www.fanimation.com](http://www.fanimation.com)

