


Uni-Packed Ceiling Fan Assembly – LX25**



LX25ML

LX25ML Uni-packed Finishes	
Fan / Housing / Blade Assembly	Description
Fan Motor	Black
Motor Housing (Side-Light Kit Adaptable)	Malawi®
Blades (set of 3)	B2040BL Black Carved Wood

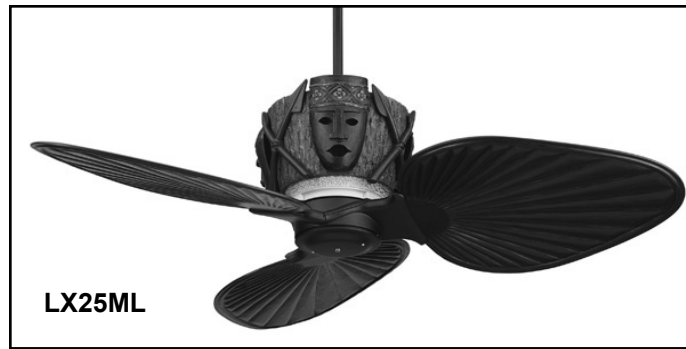

LX25PW

LX25PW Uni-packed Finishes	
Fan / Housing / Blade Assembly	Description
Fan Motor	Pewter
Motor Housing	Amalfi® – Pewter
Blades (set of 3)	B2070CP Cairo Purple Wood



LX25RS

LX25RS Uni-packed Finishes	
Fan / Housing / Blade Assembly	Description
Fan Motor	Rust (Damp)
Motor Housing	Amalfi® – Rust (Damp)
Blades (set of 3)	B3000IM Brown Wicker Weave



LX25ZB

LX25ZB Uni-packed Finishes	
Fan / Housing / Blade Assembly	Description
Fan Motor	Black
Motor Housing (Side-Light Kit Adaptable)	Zanzibar®
Blades (set of 3)	B2040BL Black Carved Wood



Copyright 2007 Fanimation, Inc.

10983 Bennett Parkway
 Zionsville, IN 46077
 Toll Free (888) 567-2055
 FAX (866) 482-5215
 Outside U.S. call (317) 733-4113
 Visit Our Website www.fanimation.com



2007/12

The Treventi® FP2500 / LX25 Series




Select Finishes

SPECIFICATION SHEET



Product Specifications subject to change

The Treventi® Fan Assembly – FP2500**

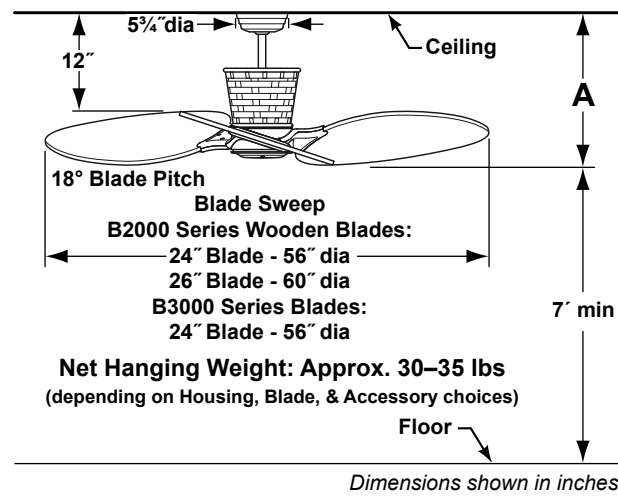

** Available Finishes	
AB	Antique Brass
BL	Black (Damp)
MW	Matte White (Damp)
PW	Pewter
RS	Rust (Damp)

Distance from Ceiling to Edge of Blade	A
Fan w/7" downrod	18"
Fan w/12" downrod	23"
Fan w/18" downrod	29"
Fan w/24" downrod	35"
Fan w/36" downrod	47"
Fan w/48" downrod	59"
Fan w/60" downrod	71"
Fan w/72" downrod	83"

INSTALLATION REQUIREMENTS:

Ceiling fan is secured to a structural member such as a ceiling joist and must be capable of withstanding a load of at least 50 pounds. A lag bolt will pass through the junction box and into the wood member above.

ELECTRICAL REQUIREMENTS / MOTOR ASSEMBLY (MA25**):

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz version is available.

FAN SPEEDS:

Material, shape, and size of fan blade will affect the speed of the fan. In general, the larger blades will turn slower than the smaller blades and the narrower blades will turn faster than the wide blades.

HOUSING ASSEMBLY (HA25__):

The motor housing (sold separately) are available in many different styles, materials and finishes to fit your decor. See catalog or visit our website, www.fanimation.com for more housing selections.

CONTROL OPTIONS:

The remote control (C22), wall control (C23, includes white faceplate) and receiver (P2550) are all included. Push button control with frequency code settings located on both the transmitter and the receiver units. Each push button unit will consist of 3 separate speeds, reverse, up/down light controls, and off button. Installation and operating instructions provided with each control.

LIGHTING OPTIONS:

The 3-bulb uplight fixture is included with this fan assembly, with a maximum of 120 watts (candelabra bulbs, 40 watt max - not included). Optional Side-Light Kit (LK25 - bulbs included) is available. Maximum wattage including uplight, sidelight and downlight not to exceed 300 watts. See catalog or visit our website, www.fanimation.com for more lighting options.

DOWN ROD OPTIONS:

The Treventi® fan comes with a standard 7" down rod. Optional down rods are available in 12", 18", 24", 36", 48", 60", and 72". For installations requiring a longer down rod, a down rod coupler is available. The Treventi® fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a down rod longer than the standard 7" down rod. Optional sloped ceiling ball kits (SCB52) are available for up to 52°. Call tech support for more information.


BLADE SETS:

B2000 & B3000 Series Blades: (sold separately) are available, see catalog or visit our website, www.fanimation.com for more blade selections.

Uni-Packed Ceiling Fan Assembly – LX25**

General Specs (see previous page for more detailed specs information)	
Electrical Requirements	120 VAC, 60 Hz, 15 amp
Blade Sweep / Pitch	56" / 18°
Dimension (w/7" DR)	18" from ceiling to blade edge
Fan Controls	C22 Remote & C23 Wall Controls
Built-in Uplight (bulbs not included)	3-40 watts, candelabra
Down Light Kit / Glass	Optional – Sold Separately
Net Hanging Weight	30 – 35 lbs
Damp Location Usage	Not Recommended (except LX25RS)

LX25CT Uni-packed Finishes	
Fan / Housing / Blade Assembly	Description
Fan Motor	Pewter
Motor Housing (Side-Light Kit Adaptable)	Chianti®
Blades (set of 3)	Adirondack Pine Carved Wood

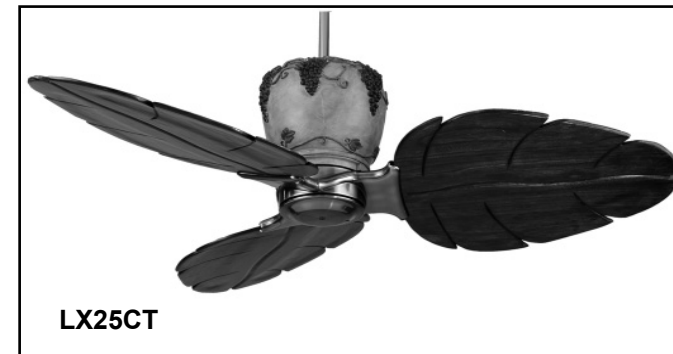


LX25CT

LX25IM Uni-packed Finishes	
Fan / Housing / Blade Assembly	Description
Fan Motor	Rust
Motor Housing (Side-Light Kit Adaptable)	Islamorada®
Blades (set of 3)	B2070CP Cairo Purple Wood



LX25IM

LX25KR Uni-packed Finishes	
Fan / Housing / Blade Assembly	Description
Fan Motor	Rust (Damp)
Motor Housing (Side-Light Kit Adaptable)	Keramos®
Blades (set of 3)	B3000BW Dark Brown Weave

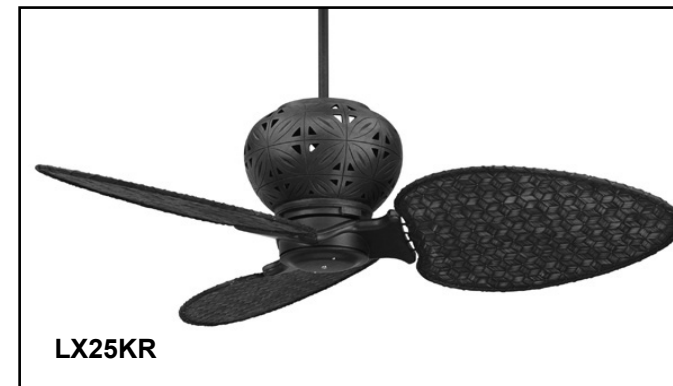

LX25KR