


# **The Palisade<sup>®</sup>**

## **FP240 Series**

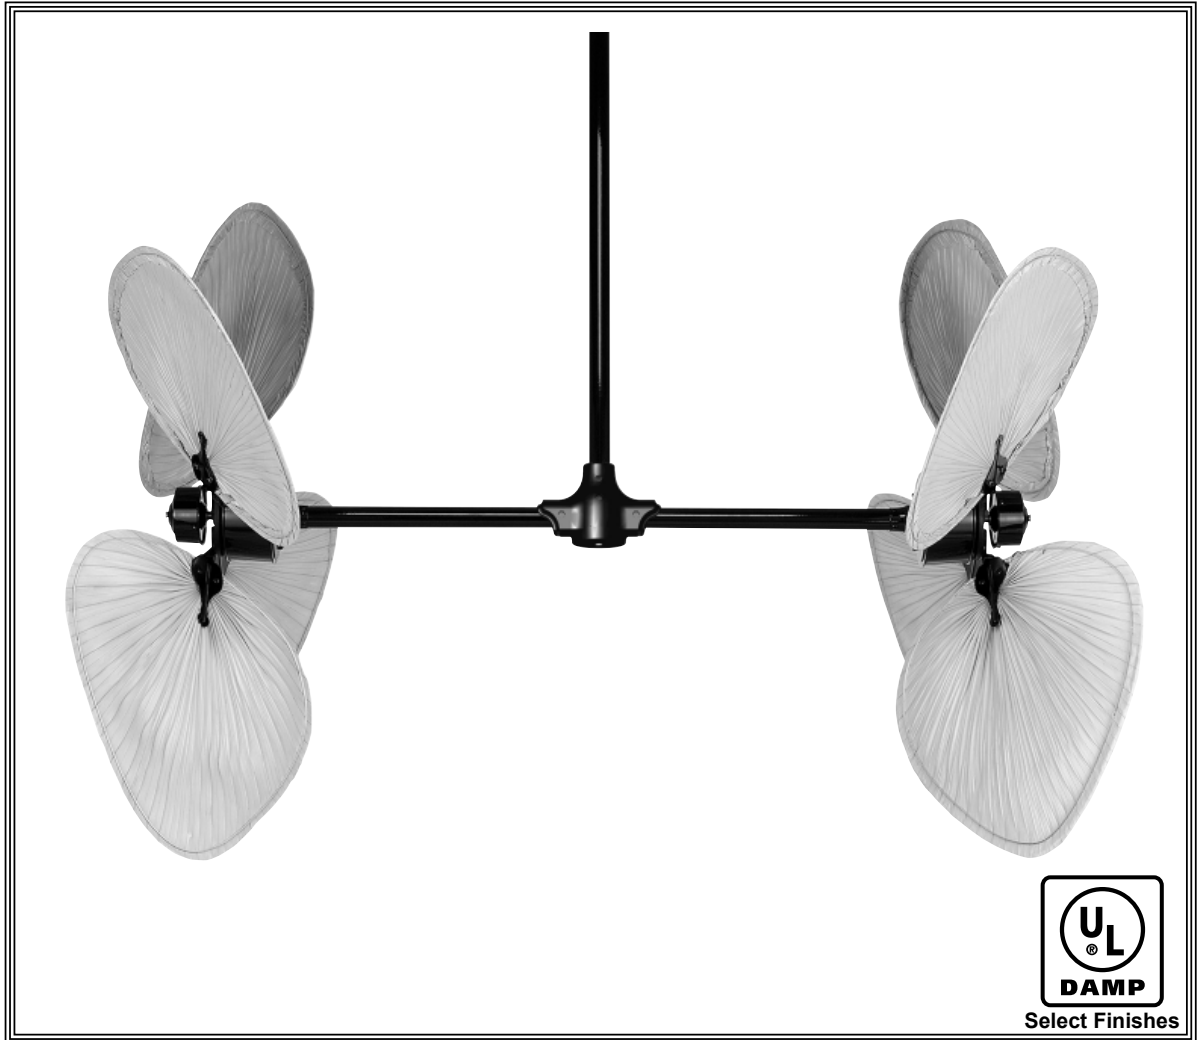


Select Finishes

# **SPECIFICATION SHEET**



*Product Specifications subject to change*

# The Palisade® Fan Assembly – FP240\*\*

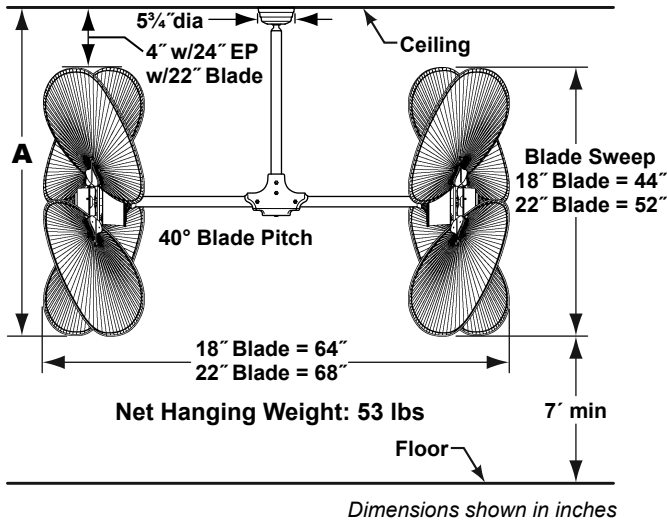

Available Finishes	
AB	Antique Brass
BL	Black ( <b>Damp</b> )
MW	Matte White ( <b>Damp</b> )
OB	Oil-Rub'd Brnz ( <b>Damp</b> )
PW	Pewter
RS	Rust ( <b>Damp</b> )
SN	Satin Nickel

Distance from Ceiling to Bottom of Blades	A
*24" Pole w/18" Palm Blades	51"
30" Pole w/22" Palm Blades	61"
36" Pole w/22" Palm Blades	67"
48" Pole w/22" Palm Blades	79"
60" Pole w/22" Palm Blades	91"
72" Pole w/22" Palm Blades	103"

\* 24" Extension Pole may be used with 18" blades only

\* Can be mounted on a sloped ceiling up to 45°

Component Weights	
Motor Assembly Unit (2)	14 lbs
Horizontal Tube Assembly	5 lbs
Blade Set (8) <sup>†</sup>	3-5 lbs
Extension Pole <sup>†</sup>	1 lb/ft

<sup>†</sup>Sold Separately

## INSTALLATION REQUIREMENTS:

Ceiling fan is secured to a structural member such as a ceiling joist and must be capable of withstanding a load of at least 100 pounds. A 3/8" x 5" long lag bolt passes through the loop of the ceiling support cable, hanger bracket plate, the outlet box and into the wood member above.

## ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. Two motors per fan: 120 VAC, 60 Hz, 0.90 amps (each motor). [Single-speed (no control) 220 VAC, 50 Hz version available]

## FAN SPEEDS:

High – 50 rpm; Low – 30 rpm

## DESIGN FEATURES:

Redesigned to assure stability, convenient assembly and easier installation. The Palisade® fan is now remote control adaptable (see control option below).

## CONTROL OPTIONS:

1. Wall control (C3) supplied with fan. Instructions provided with control.
2. Optional fan & light remote control receiver unit (SW24) is available, to be used in conjunction with: C24 hand-held remote control and/or C25 wall-mount remote control. Instructions provided with each control.

## LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more lighting options.

## BLADE OPTIONS:

Various Palm, Bamboo, and Wood blades are sold separately. See catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more blade selections.

## ACCESSORY OPTIONS:

Various optional accessories are available. Optional sloped ceiling kits (SCK52) are available for up to 52°. See catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more information.



10983 Bennett Parkway  
Zionsville, IN 46077  
Toll Free (888) 567-2055  
FAX (866) 482-5215

Outside U.S. call (317) 733-4113

Visit Our Website [www.fanimation.com](http://www.fanimation.com)

