

# The Palmetto<sup>®</sup> Ceiling Fan Assembly

## INSTALLATION REQUIREMENTS:

It is recommended that each drive shaft support requires backing consisting of 3/4" plywood (20" x 20") attached to the ceiling joists, snug above the sheet rock, and able to support 100 lbs. Not recommended for sound-sensitive areas.

## ELECTRICAL REQUIREMENTS:

The drive shaft support that contains the motor will require a 120 VAC, 60 Hz, 15 amps electrical feed via a flush mount junction box positioned on center and wired back to an on/off switch (motor unit is single speed). Any support that contains a light fixture will also require a junction box on center with a circuit wired back to a dimmer circuit or on/off switch. The lights and motor should be on separate switch legs.

## FAN SPEED:

Single-speed, 15 rpm; NOT designed for significant air movement.

## BLADE OPTIONS:

Various Palm and Bamboo blades are sold separately. See Catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more blade selections.

## LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. Can be only mounted on the cap housing. Installation instructions provided with each light fitter and light kit. See Catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more lighting options.

## DAMP LOCATION:

Fan not rated for Damp Location usage.



Copyright 2007 Fanimation, Inc.

10983 Bennett Parkway  
Zionsville, IN 46077  
Toll Free (888) 567-2055  
FAX (866) 482-5215  
Outside U.S. call (317) 733-4113  
Visit Our Website [www.fanimation.com](http://www.fanimation.com)



2007/12

# The Palmetto<sup>®</sup>

## FP600 Series




## SPECIFICATION SHEET



Product Specifications subject to change

# The Palmetto®

# Fan Assembly

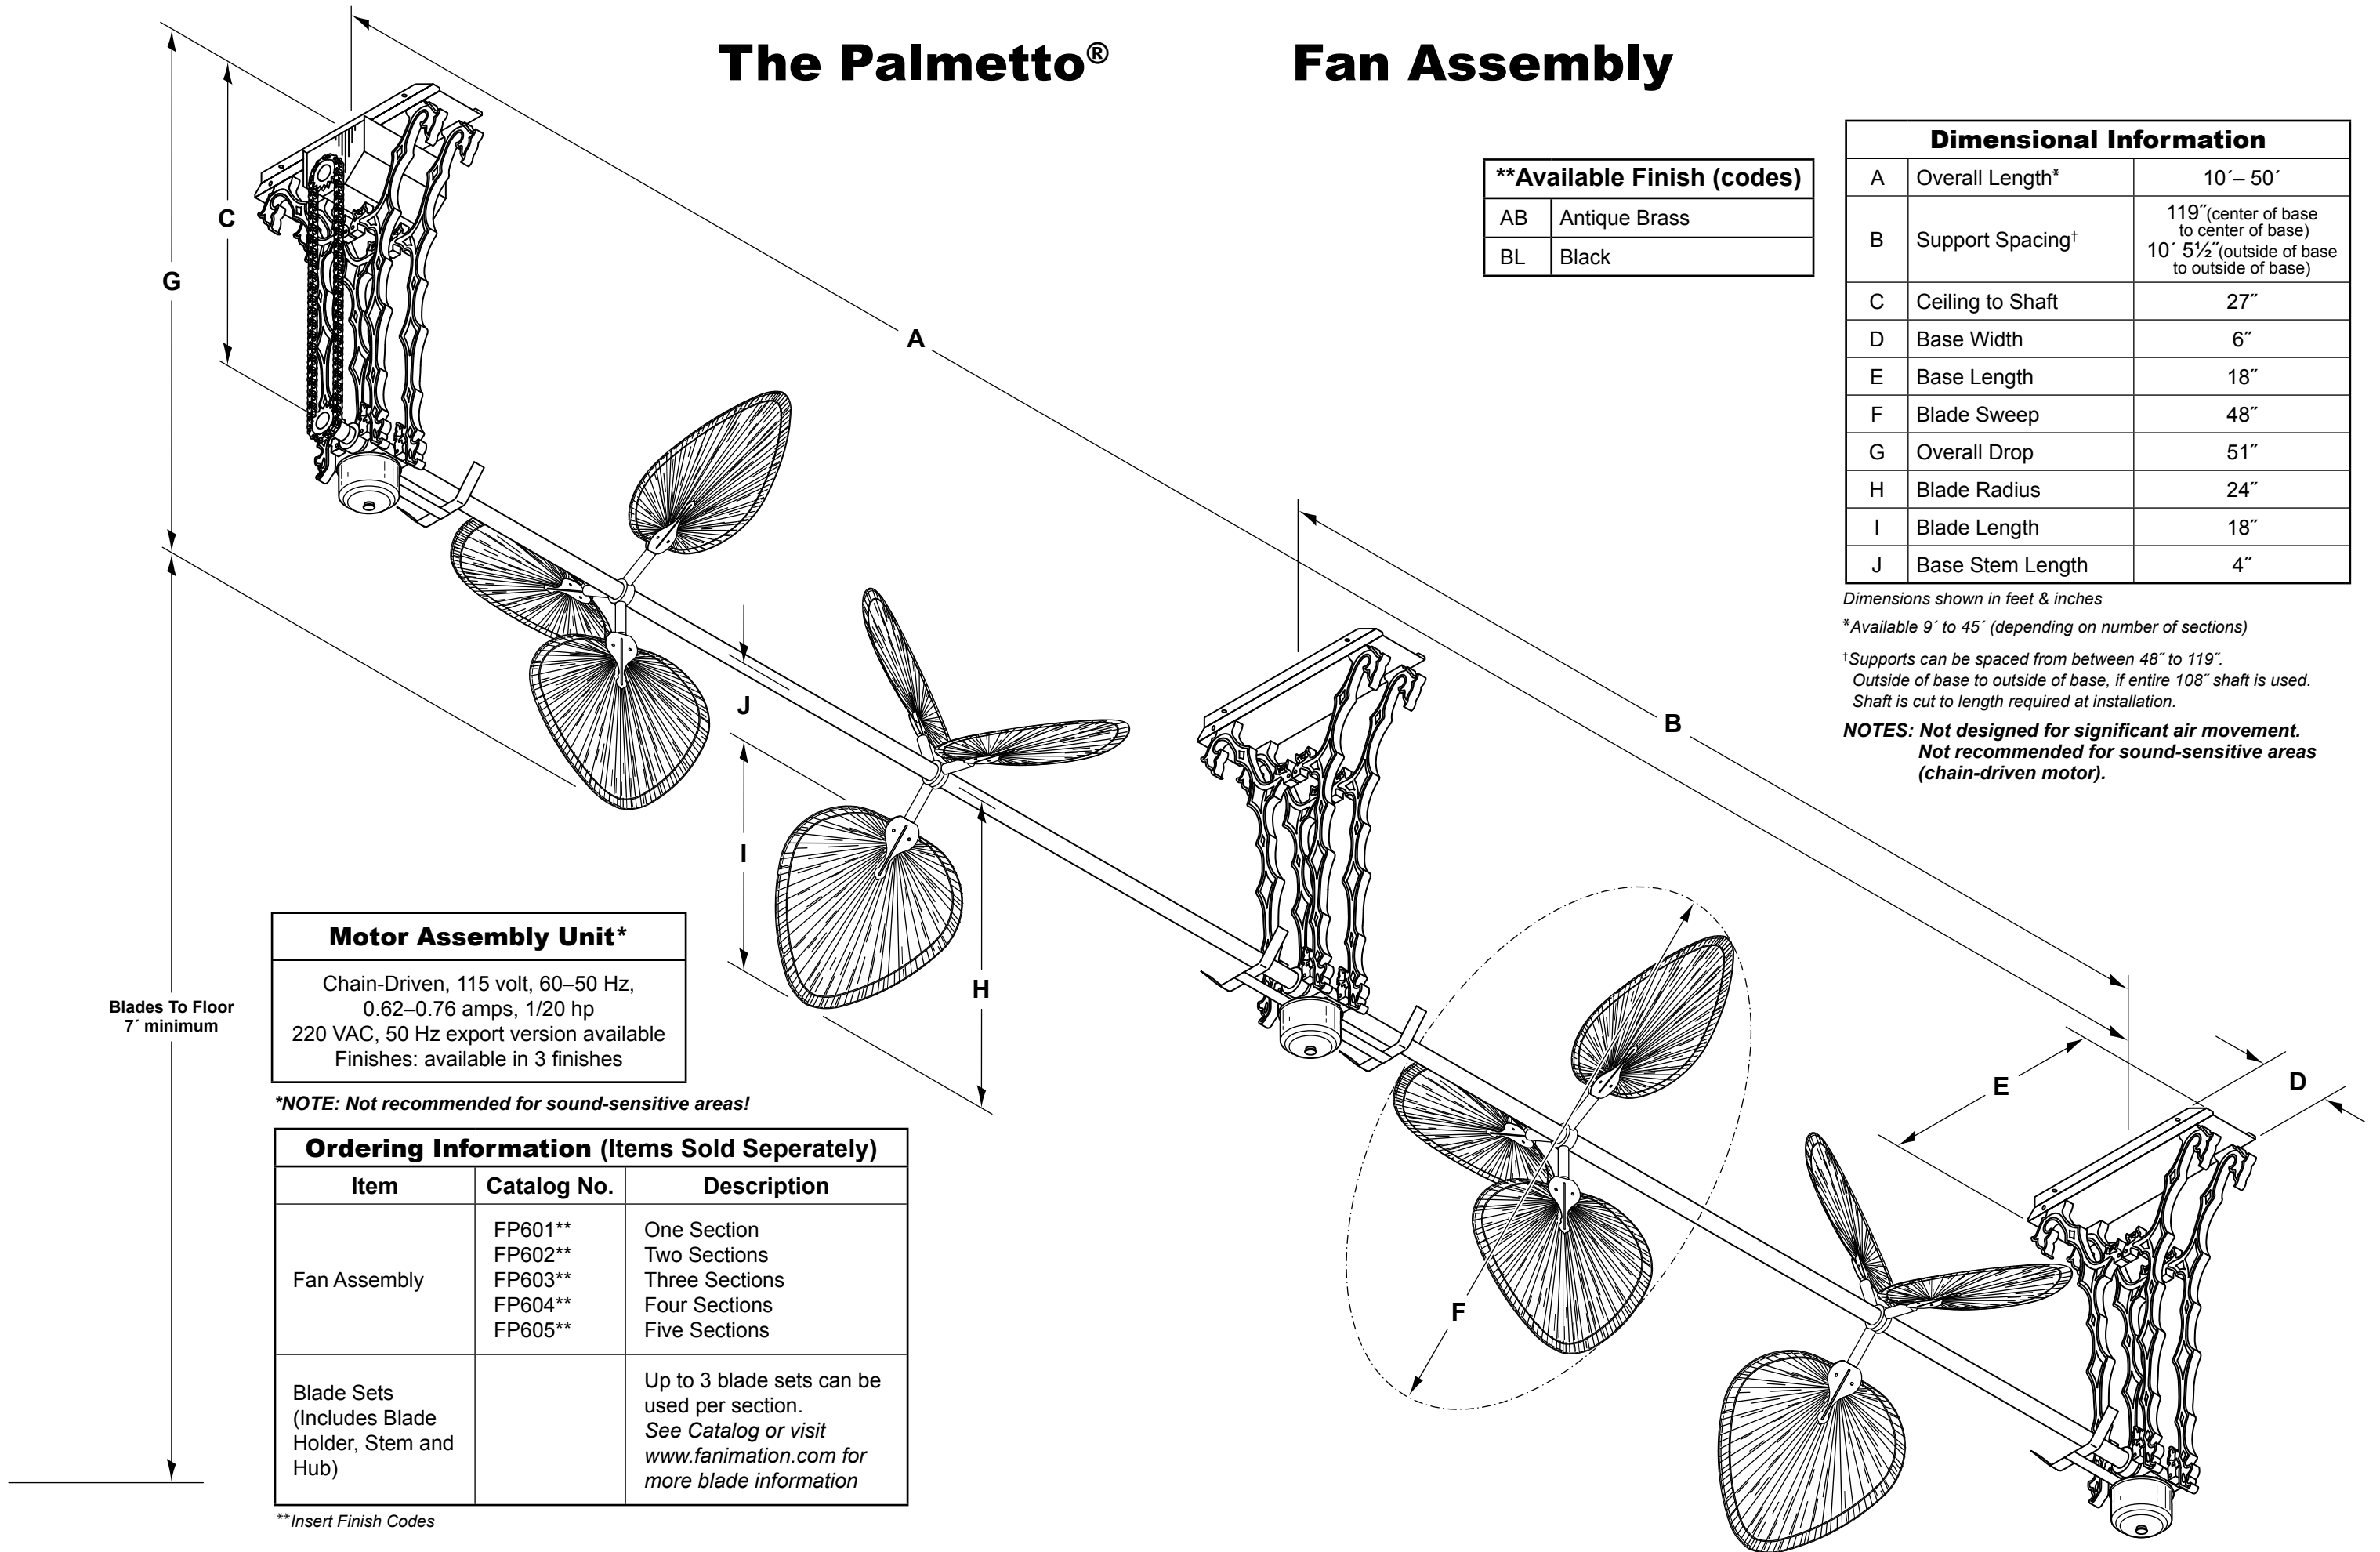

**Available Finish (codes)	
AB	Antique Brass
BL	Black

Dimensional Information		
A	Overall Length*	10' - 50'
B	Support Spacing†	119" (center of base to center of base) 10' 5½" (outside of base to outside of base)
C	Ceiling to Shaft	27"
D	Base Width	6"
E	Base Length	18"
F	Blade Sweep	48"
G	Overall Drop	51"
H	Blade Radius	24"
I	Blade Length	18"
J	Base Stem Length	4"

Dimensions shown in feet & inches

\*Available 9' to 45' (depending on number of sections)

†Supports can be spaced from between 48" to 119".  
Outside of base to outside of base, if entire 108" shaft is used.  
Shaft is cut to length required at installation.

**NOTES: Not designed for significant air movement.  
Not recommended for sound-sensitive areas (chain-driven motor).**

Motor Assembly Unit*
Chain-Driven, 115 volt, 60-50 Hz, 0.62-0.76 amps, 1/20 hp 220 VAC, 50 Hz export version available Finishes: available in 3 finishes

**\*NOTE: Not recommended for sound-sensitive areas!**

Ordering Information (Items Sold Separately)		
Item	Catalog No.	Description
Fan Assembly	FP601**	One Section
	FP602**	Two Sections
	FP603**	Three Sections
	FP604**	Four Sections
	FP605**	Five Sections
Blade Sets (Includes Blade Holder, Stem and Hub)		Up to 3 blade sets can be used per section. See Catalog or visit <a href="http://www.fanimation.com">www.fanimation.com</a> for more blade information

\*\*Insert Finish Codes

Blades To Floor  
7' minimum