

## 5 – Blade Traditional Style Model

### FP7500 Series – Traditional, 5 Blades

#### Available Uni-Packed Finishes

Fan Motor Assembly (188 x 25)	Blades - Palm/Bamboo (18° Pitch)	Blade Sweep	Ceiling to Blade Bottom Edge	Ceiling to Switch Cup	RPM's (H / M / L)
FP7500AB – Antique Brass	ISP4 – 22" Narrow Oval Palm	52"	14"	14½"	90 / 65 / 40
FP7500MW – Matte White	ISP5 – 18" Narrow Oval Palm	44"	14"	14½"	120 / 95 / 50
FP7500RS – Rust ( <b>Damp</b> )	ISD4A – 22" Narrow Oval Bamboo	52"	14"	14½"	95 / 70 / 40
<b>220V Models</b>					
FP7500AB-220 – Antique Brass	ISP4 – 22" Narrow Oval Palm	52"	14"	14½"	90 / 65 / 40
FP7500RS-220 – Rust ( <b>Damp</b> )	ISD4A – 22" Narrow Oval Bamboo	52"	14"	14½"	90 / 70 / 40

#### INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

#### ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz export version available.

#### FAN SPEEDS:

Pull-chain, 3 fan speeds with reversing switch (on switch cup housing). Speeds will vary depending on blade size and type.

#### CONTROL OPTIONS:

Optional remote and wall controls are available. See Catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more control options.

#### LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See Catalog or visit our web site, [www.fanimation.com](http://www.fanimation.com) for more lighting options.

#### DOWNROD OPTIONS:

The fan comes with a 1" Dia. x 6" (DR1-6) downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". The fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call tech support for more information.

#### BLADE SETS:

A set of 5 Palm or Bamboo blades are included.


#### DAMP LOCATION:

Rust finish model with bamboo blades is rated for Damp Location.



Copyright 2007 Fanimation, Inc.

10983 Bennett Parkway  
Zionsville, IN 46077  
(888) 567-2055  
FAX (866) 482-5215  
Outside U.S. call (317) 733-4113  
Visit Our Website [www.fanimation.com](http://www.fanimation.com)




2007/07

# The Windpointe™

## UNI-PACK SERIES FANS

FP7300 / FP7400 / FP7500

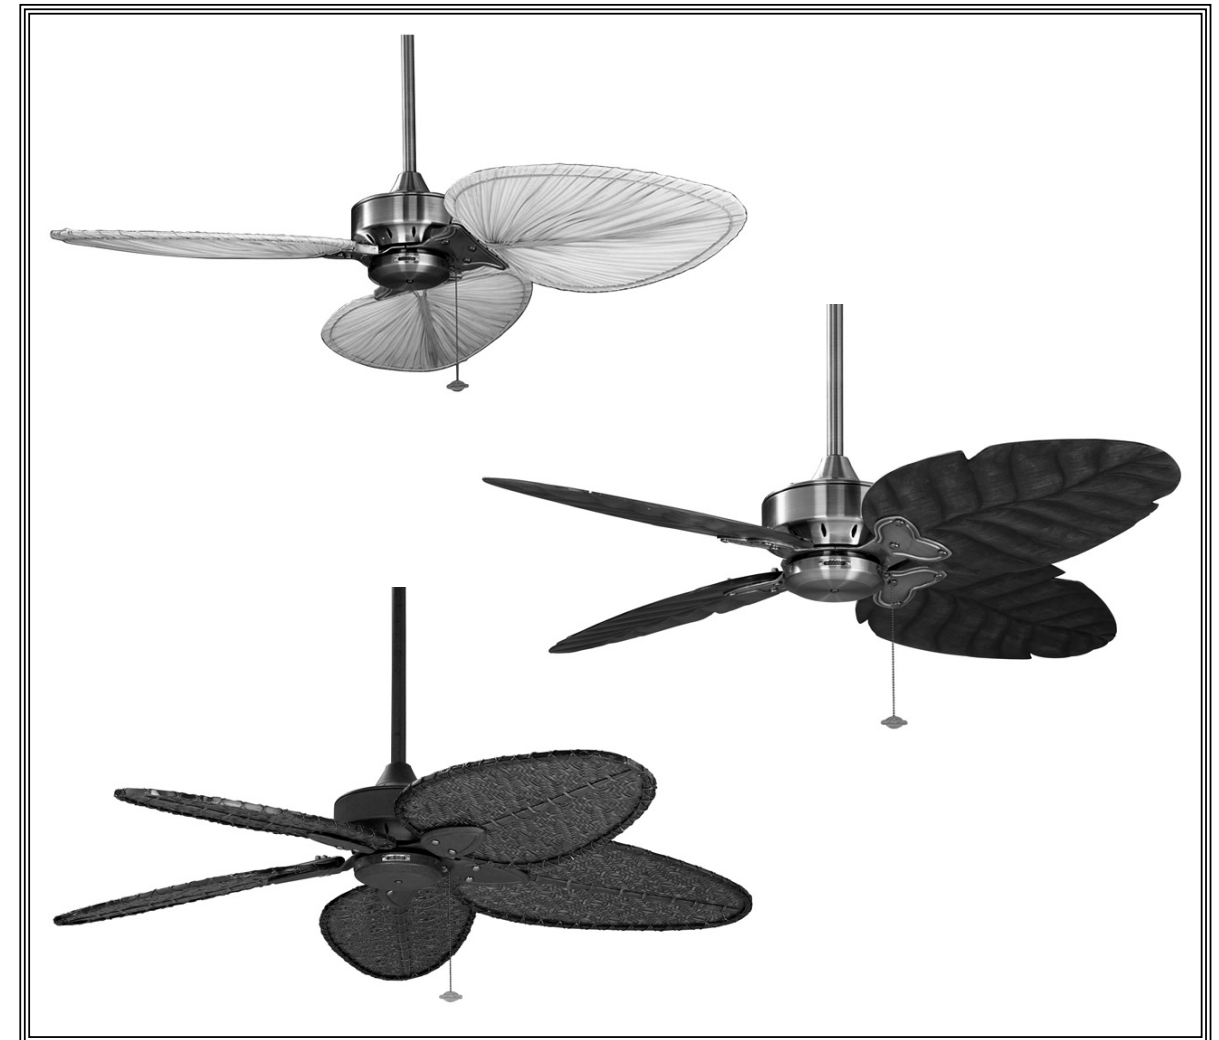

## SPECIFICATION SHEET



Product Specifications subject to change



## 3 – Blade Style Model

FP7300 Series – 3 Blades					
Available Uni-Packed Finishes					
Fan Motor Assembly (188 x 25)	Blades (14° Pitch)	Blade Sweep	Ceiling to Blade Bottom Edge	Ceiling to Switch Cup	RPM's (H / M / L)
FP7300AB – Antique Brass	B3000P – Wide Oval Palm	56"	15"	14½"	110 / 90 / 55
FP7300PW – Pewter	B2000CP – Wood	60"	13½"	14½"	125 / 95 / 60
FP7300RS – Rust (Damp)	B3000BW – Wide Oval, Woven	56"	15"	14½"	120 / 95 / 50
220V Model					
FP7300RS-220 – Rust (Damp)	B3000BW – Wide Oval, Woven	56"	15"	14½"	120 / 85 / 50

### INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz export version available.

### FAN SPEEDS:

Pull-chain, 3 fan speeds with reversing switch (on switch cup housing). Speeds will vary depending on blade size and type.

### CONTROL OPTIONS:

Optional remote and wall controls are available. See Catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more control options.

### LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See Catalog or visit our web site, [www.fanimation.com](http://www.fanimation.com) for more lighting options.

### DOWNROD OPTIONS:

The fan comes with a 1" Dia. x 6" (DR1-6) downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". The fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call tech support for more information.

### BLADE SETS:

A set of 3 blades are included.

### DAMP LOCATION:

Rust finish model with woven blades is rated for Damp Location.



## 4 – Blade Style Model

FP7400 Series – Wood, 4 Blades					
Available Uni-Packed Finishes					
Fan Motor Assembly (188 x 25)	Blades - Wood (14° Pitch)	Blade Sweep	Ceiling to Blade Bottom Edge	Ceiling to Switch Cup	RPM's (H / M / L)
FP7400AB – Antique Brass	B4010CP – Cairo Purple Wood	52"	14"	14½"	175 / 120 / 70
FP7400PW – Pewter	B4010PO – Pickled Oak Wood	52"	14"	14½"	175 / 120 / 70
FP7400RS – Rust	B4020SS – Sambel Sand Wood	52"	14"	14½"	160 / 110 / 65
220V Model					
FP7400RS-220 – Rust	B4020SS – Sambel Sand Wood	52"	14"	14½"	160 / 110 / 65

### INSTALLATION REQUIREMENTS:

Ceiling fan attaches to electrical junction box securely anchored and capable of withstanding a load of at least 50 lbs.

### ELECTRICAL REQUIREMENTS:

Ceiling fan requires a grounded electrical supply line of 120 volts AC, 60 Hz, 15 amp circuit. 220 VAC, 50 Hz export version available.

### FAN SPEEDS:

Pull-chain, 3 fan speeds with reversing switch (on switch cup housing). Speeds will vary depending on blade size and type.

### CONTROL OPTIONS:

Optional remote and wall controls are available. See Catalog or visit our website, [www.fanimation.com](http://www.fanimation.com) for more control options.

### LIGHTING OPTIONS:

Optional lighting fitters and light kits are available, including a single bowl fixture with a maximum of 180 watts and a variety of four-light fixtures with a maximum of 240 watts. See Catalog or visit our web site, [www.fanimation.com](http://www.fanimation.com) for more lighting options.

### DOWNROD OPTIONS:

The fan comes with a 1" Dia. x 6" (DR1-6) downrod. Optional downrods are available in 12", 18", 24", 36", 48", 60", and 72". The fan can be mounted on a sloped ceiling up to 30°. Most sloped ceiling installations require a downrod longer than the standard 6" downrod. Optional sloped ceiling ball kits (SCB1-52) are available for up to 52°. Call tech support for more information.

### BLADE SETS:

A set of 4 wood blades are included. Not recommended for Damp Location.

### DAMP LOCATION:

Fan not rated for Damp Location usage.