

*Complement
your purchase
with these
fine accessories
also from
GINGER®:*

*Towel Bars
Towel Rings
Toilet Tissue Holders
Hooks
Soap Dishes
Tumbler Holders
Toiletry Shelves
Grab Bars
Mirrors
Lights
Bud Vases
Hotel Shelves
Shower Curtain Rods
Soap & Bottle Baskets
Cabinet Hardware*

G U S A

460-N Greenway Industrial Drive
Fort Mill, SC 29708



MIRROR

WITH TILT MECHANISM

INSTALLATION
INSTRUCTIONS


for
CIRCA





INSTALLATION INSTRUCTIONS FOR MIRRORS

MIRROR Model #0741 with tilting mechanism

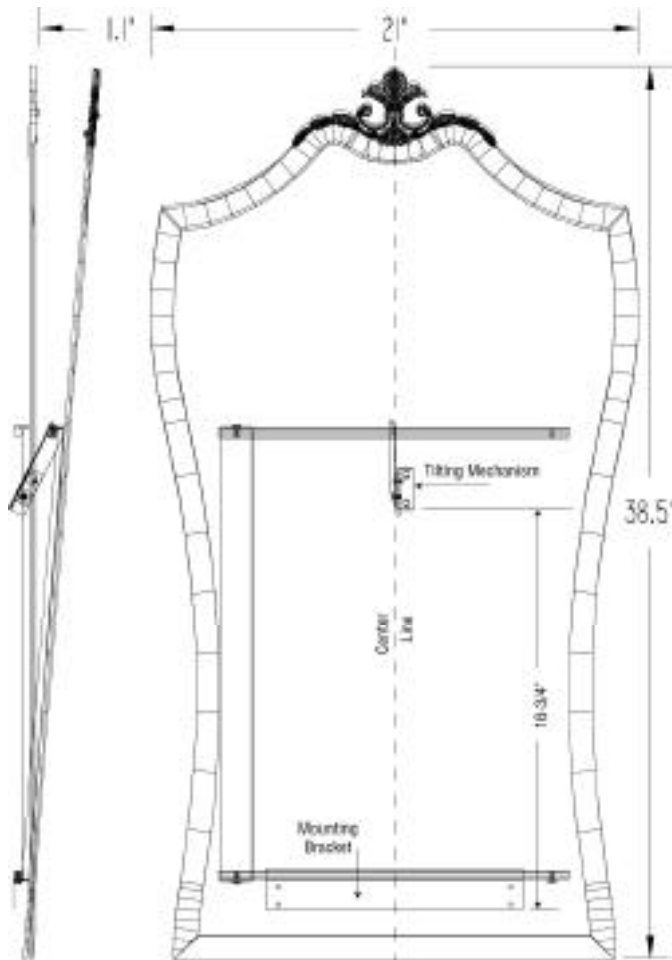

CIRCA TILTING MIRROR

TILTING MIRROR INSTALLATION:

1. Determine location of mirror on wall.
2. Position the mounting bracket as illustrated. The bracket should be level and in the center of the desired mirror location. Mark the location of the mounting bracket screw holes on the wall.
3. Position the tilting mechanism as illustrated. Mark the location of the mounting screw holes on the wall.
4. Drill 3/16" (5mm) holes in dry wall, 1/4" (6mm) in tile at the screw hole marks. Insert anchors and tap flush with wall.
5. Position the mounting bracket and the tilting mechanism over the anchors and install screws.
6. Swing the tilting mechanism to the vertical position (flush against the wall.)
7. Slide mirror down wall until cross rods are engaged in tilting mechanism and mounting bracket. The bracket, not the tilting mechanism, should support weight of mirror. Adjust mounting bracket or tilting mechanism position if necessary.

Tools needed:

Pencil
Tape measure
Phillips Screwdriver
Drill
Level.