



Grohsafe 35 251 Pressure Balance rough-in valve

Description

Diaphragm cartridge
 Handle limit stop (temperature control)
 Built-in by-pass
 Check valves
 Service stops 3-port (2 inlets, 1 outlet)
 Inlets and Outlets: Universal connection,
 1/2" male by copper sweat

Flow Rate


6.8 at 45 psi

Code Compliance

- ASME/ANSI A112.18.M

Finish Options

35 251 OOO Rough Brass

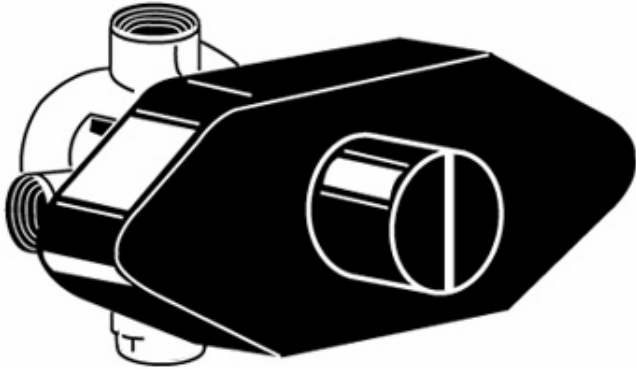

Flow Rates:

Psi	15	30	45	60	75	90
g/min.	4.1	5.9	6.8	8.1	8.7	9.5

