




Grohsafe 35 252 Pressure Balance rough-in valve

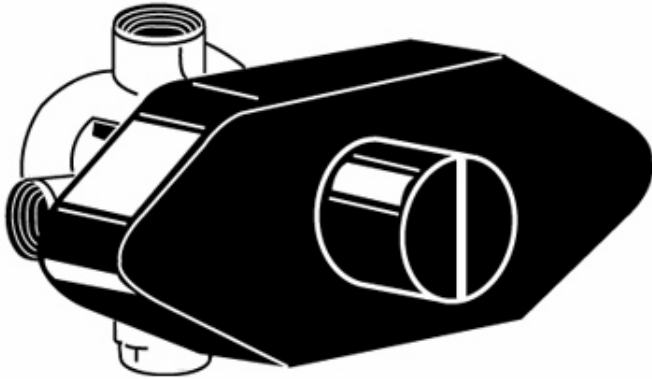

Description

Diaphragm cartridge
 Handle limit stop (temperature control)
 Built-in by-pass
 Check valves
 No service stops 4-port (2 inlets, 2 outlets)
 Inlets: 1/2" FIP (Copper connection adapters provided)

Outlets: Universal connection is 1/2" male by copper sweat

Flow Rate

6.8 at 45 psi

Code Compliance

- ASME/ANSI A112.18.M

Finish Options

35 252 000 Rough Brass

Flow Rates: (- - - = shower outlet)

Psi	15	30	45	60	75	90
g/min.	3.8	5.3	6.8	7.7	8.3	8.9
- - -	3.6	5.1	6.2	7.3	7.9	8.3

