
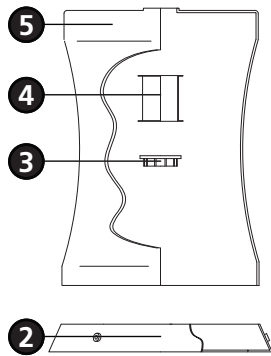


## Drawing 1 - Fixture Assembly

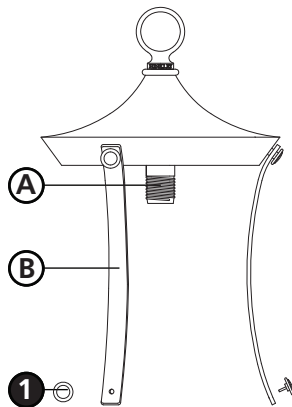

## ▼ start here

1

1. Find a clear area in which you can work.
2. Unpack fixture and glass from carton.
3. Carefully review instructions prior to assembly.

**\*\*\* The construction of this fixture will be accomplished by first installing the glass, installing the mounting strap, making all necessary electrical connections, and then hanging the fixture.**

**SAFETY WARNING: READ WIRING AND GROUNDING INSTRUCTIONS (I.S. 18) AND ANY ADDITIONAL DIRECTIONS. TURN POWER SUPPLY OFF DURING INSTALLATION. IF NEW WIRING IS REQUIRED, CONSULT A QUALIFIED ELECTRICIAN OR LOCAL AUTHORITIES FOR CODE REQUIREMENTS.**

2

1. To install glass, remove decorative knob (1) from the bottom of the 3 uprights (B).
2. Remove bottom ring (2).
3. Remove socket ring (3) and spacer (4) from threaded socket (A).
4. Slip glass (5) over socket (A) and hold in position.
5. Slip spacer (4) over socket and hold in position.
6. Thread socket ring (3) onto socket and tighten.
7. Slip bottom ring (2) onto bottom of glass (5) and line up the hole in the ring with the holes in the uprights (B).
8. Thread decorative knob (1) back into ring (2).
9. Fixture can now be lamped accordingly.
10. Please refer to the hanging instruction sheet (I.S. 19) provided to complete installation of this fixture.

Note: Maximum wattage for 1282 fixture is 100 watts per bulb.