

ODEL: 02253

ASSEMBLY INSTRUCTIONS

READ AND SAVE THESE INSTRUCTIONS


CAUTION:
HEAVY STONE FOUNTAIN
TWO PEOPLE REQUIRED TO LIFT AND ASSEMBLE

UNPACK THE FOUNTAIN


YOU SHOULD HAVE RECEIVED THE FOLLOWING PARTS:
UPPER COLUMN, PUMP WITH LIGHT, (2) BULBS, (3)
BIRDS, RESERVIOR, LOWER COLUMN, BASE AND
TRANSFORMER.

FOUNTAIN ASSEMBLY


1. PLACE LOWER COLUMN ON TOP OF BASE AND
ROTATE THE LOWER COLUMN TO SECURE.

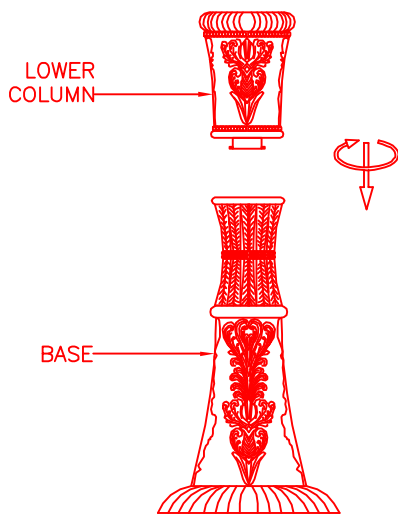


2. PLACE RESERVIOR ON TOP OF LOWER COLUMN
AND ROTATE THE RESERVIOR TO SECURE.

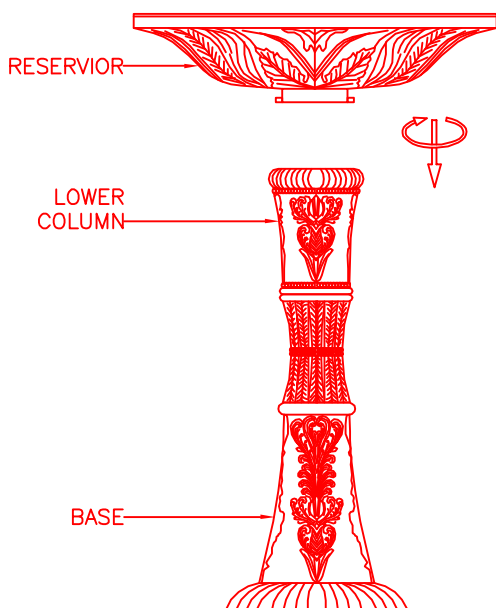


3. FEED THE PUMP POWER CORD THROUGH
THE PLASTIC TUBE TOWARD BOTTOM OF BASE
AND CORD EXITS OUT FROM THE BOTTOM.

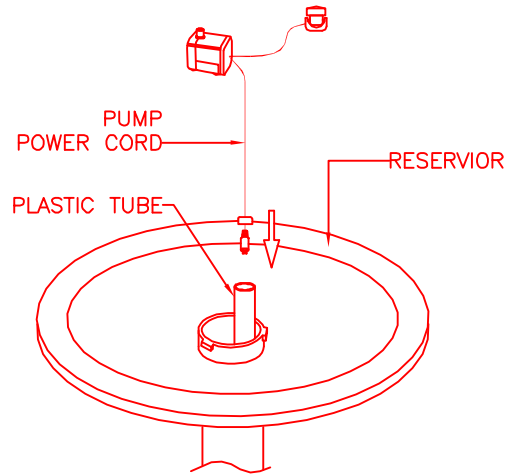

4. PLACE PUMP AND BULB INTO RESERVIOR
AS SHOWN.

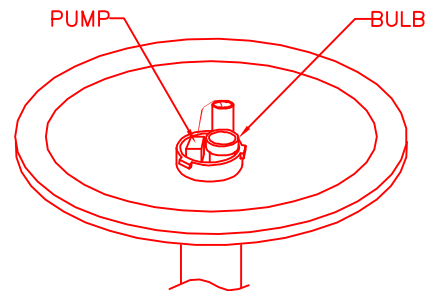

5. ATTACH RUBBER TUBE TO PUMP, PLACE
UPPER COLUMN INTO RESERVIOR AND ROTATE
THE UPPER COLUMN TO SECURE.

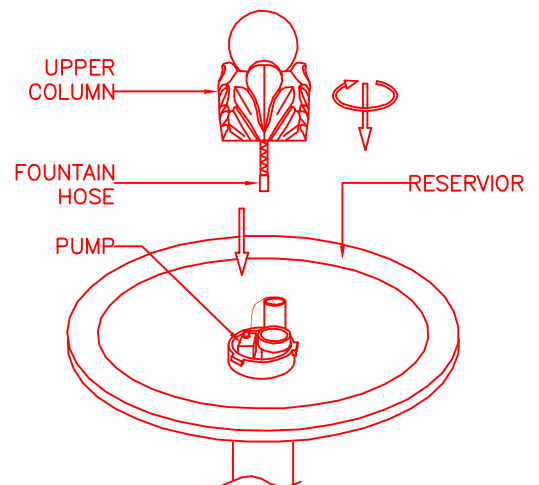

ODEL: 02253

ASSEMBLY INSTRUCTIONS


READ AND SAVE THESE INSTRUCTIONS

FOUNTAIN ASSEMBLY

6. OPTIONAL: INSERT 3 ACCENT BIRDS INTO HOLES IN EDGE OF RESERVIOR.

7. FILL RESERVOIR WITH 2 GALLONS OF WATER TO COMPLETELY SUBMERSE THE PUMP.
(DISTILLED WATER IS RECOMMENDED TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD-UP.)

8. JOIN THE CONNECTORS AT TRANSFORMER AND SCREW THE CAP TO CONNECTOR TIGHTLY TOGETHER.

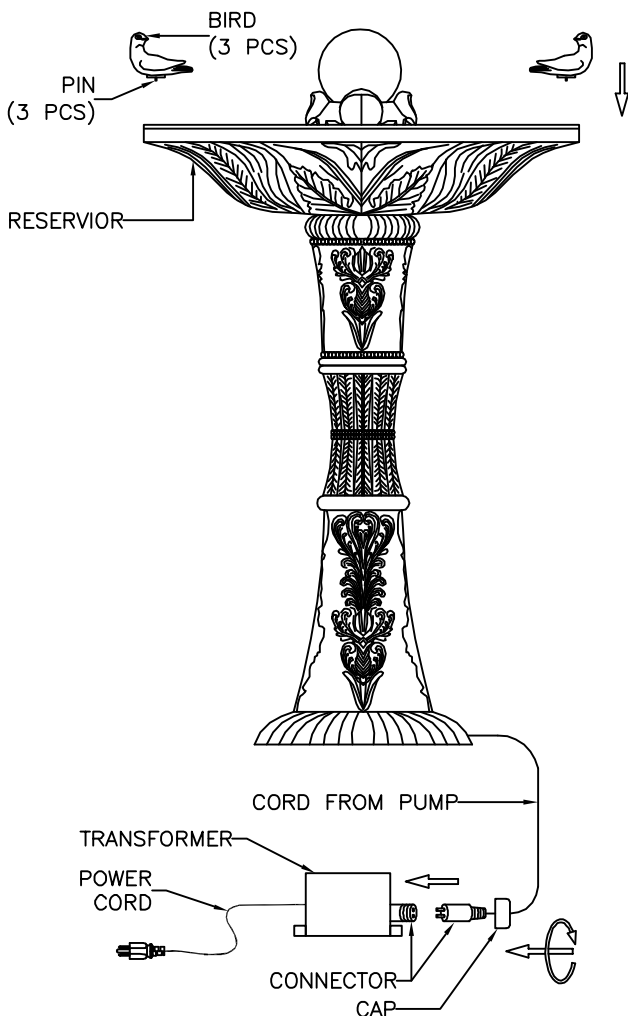

9. PLUG POWER CORD INTO SOCKET, YOUR NEW FOUNTAIN IS READY TO USE.

TROUBLE SHOOTING:

1. IF YOUR FOUNTAIN DOES NOT WORK, CHECK PLUG AT THE SOCKET. MAKE SURE THE PLUG IS FULLY AND PROPERLY INSERTED INTO THE WALL OUTLET.

2. NEXT CHECK TO MAKE SURE THE OUTLET IS POWERED.

3. IF THE FOUNTAIN STILL DOES NOT WORK, PLEASE CONTACT YOUR DISTRIBUTOR OR PLACE OF PURCHASE.

SPLASHING DISCLAIMER:

SPLASHING MAY OCCUR WHEN FOUNTAIN IS INITIALLY TURNED ON. PROTECT SURROUNDING SURFACES AS NEEDED.

IMPORTANT PUMP INFORMATION:

PUMP MUST BE FULLY SUBMERSED IN WATER WHILE OPERATING.

WATER:

TO REDUCE MINERAL DEPOSITS AND BACTERIA BUILD UP THE USE OF DISTILLED WATER IS RECOMMENDED.

WARNING:

*ONCE A WEEK INSPECT FOUNTAIN, FLOOR AND ADJACENT WALL FOR MOISTURE BUILD-UP AND CLEAN AS NECESSARY. THIS IS ESPECIALLY IMPORTANT FOR HUMID ENVIRONMENTS.

**HEAVY STONE FOUNTAIN, TWO PEOPLE REQUIRED TO LIFT AND ASSEMBLE.

***RECOMMENDED FOR OUTDOOR USE ONLY.

****THIS UNIT MUST BE CONNECTED TO A SUPPLY CIRCUIT THAT IS PROTECTED BY A GROUND FAULT CIRCUIT INTERRUPTER (GFCI). THE GFCI SHOULD BE TESTED ON A ROUTINE BASIS. TO TEST THE GFCI, PUSH THE TEST BUTTON. THE GFCI SHOULD INTERRUPT POWER. PUSH THE RESET BUTTON. POWER SHOULD BE RESTORED. IF THE GFCI FAILS TO OPERATE IN THIS MANNER, THE GFCI IS DEFECTIVE.