


### Features

- Vitreous china
- 12" (30.5 cm) rough-in
- 1.6 gpf (6 lpf)
- 2" (5.1 cm) glazed trapway
- Ingenium® flushing system
- Combination toilet
- Less seat and supply
- With Insuliner® insulated tank lining
- Includes left-hand polished chrome trip lever
- 9-3/4" (24.8 cm) x 9" (22.9 cm) water area
- 28-1/8" (71.4 cm) x 17-7/16" (44.3 cm) x 31-3/8" (79.7 cm) [K-3452]
- 28-1/8" (71.4 cm) x 18-3/8" (46.7 cm) x 31-3/8" (79.7 cm) [K-3462]


### ROUND-FRONT TOILETS

## K-3452

ALSO K-3462

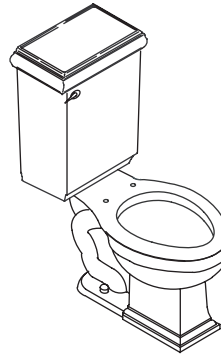

K-3452

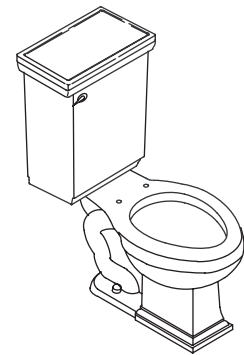

K-3462

### Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.19.2
- Energy Policy Act of 1992
- IAPMO/UPC
- CSA International
- CSA B45.0
- CSA B45.1

### Colors/Finishes

- 0: White
- Other: Refer to Price Book for additional colors/finishes

### Accessories:

- 0: White
- CP: Polished Chrome
- PB: Vibrant® Polished Brass
- Other: Refer to Price Book for additional colors/finishes

### Specified Model

Model	Description	Colors/Finishes	
K-3452	Round-front toilet – Classic design	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3452-U	Round-front toilet with Insuliner – Classic design	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3462	Round-front toilet – Stately design	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-3462-U	Round-front toilet with Insuliner – Stately design	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____

Recommended Accessories			
K-4662	Lustra™ closed-front seat with cover	<input type="checkbox"/> 0	<input type="checkbox"/> Other_____
K-7637	Angle supply with stop – 3/8" NPT	<input type="checkbox"/> CP	<input type="checkbox"/> PB <input type="checkbox"/> Other_____

### Product Specification

The round-front combination toilet shall be made of vitreous china. Toilet shall be 28-1/8" (71.4 cm) in length, 17-7/16" (44.3 cm) in width, and 31-3/8" (79.7 cm) in height [K-3452]. Toilet shall be 28-1/8" (71.4 cm) in length, 18-3/8" (46.7 cm) in width, and 31-3/8" (79.7 cm) in height [K-3462]. Toilet shall have a 9-3/4" (24.8 cm) x 9" (22.9 cm) water area. Toilet shall be for 12" (30.5 cm) rough-in. Toilet shall include a 2" (5.1 cm) glazed trapway and left-hand polished chrome trip lever. Toilet shall be 1.6 gpf (6 lpf) with Ingenium flushing system. The toilet shall be less seat and supply. Toilet shall be available with an Insuliner insulated tank lining (-U). The toilet shall be Kohler Model K-\_\_\_\_-\_\_\_\_ or K-\_\_\_\_-U-\_\_\_\_.

# MEMOIRS®

## Optional Accessories

K-9439 Trip lever – non-CP

PB

Other \_\_\_\_\_

## Technical Information


Fixture:	
Configuration	two-piece, round-front
Water per flush	1.6 gal (6 L)
Passageway	2" (5.1 cm)
Water area	9-3/4" (24.8 cm) x 9" (22.9 cm)
Water depth from rim	6" (15.2 cm)
Seat post hole centers	5-1/2" (14 cm)

### Included components:

Bowl		K-4257
Tank	Classic design	K-4454
	Stately design	K-4464
Tank cover	Classic design	84406
	Stately design	84407
Trip lever		85132-CP
Bolt cap accessory pack		1013092

## Installation Notes

Install this product according to the installation guide.

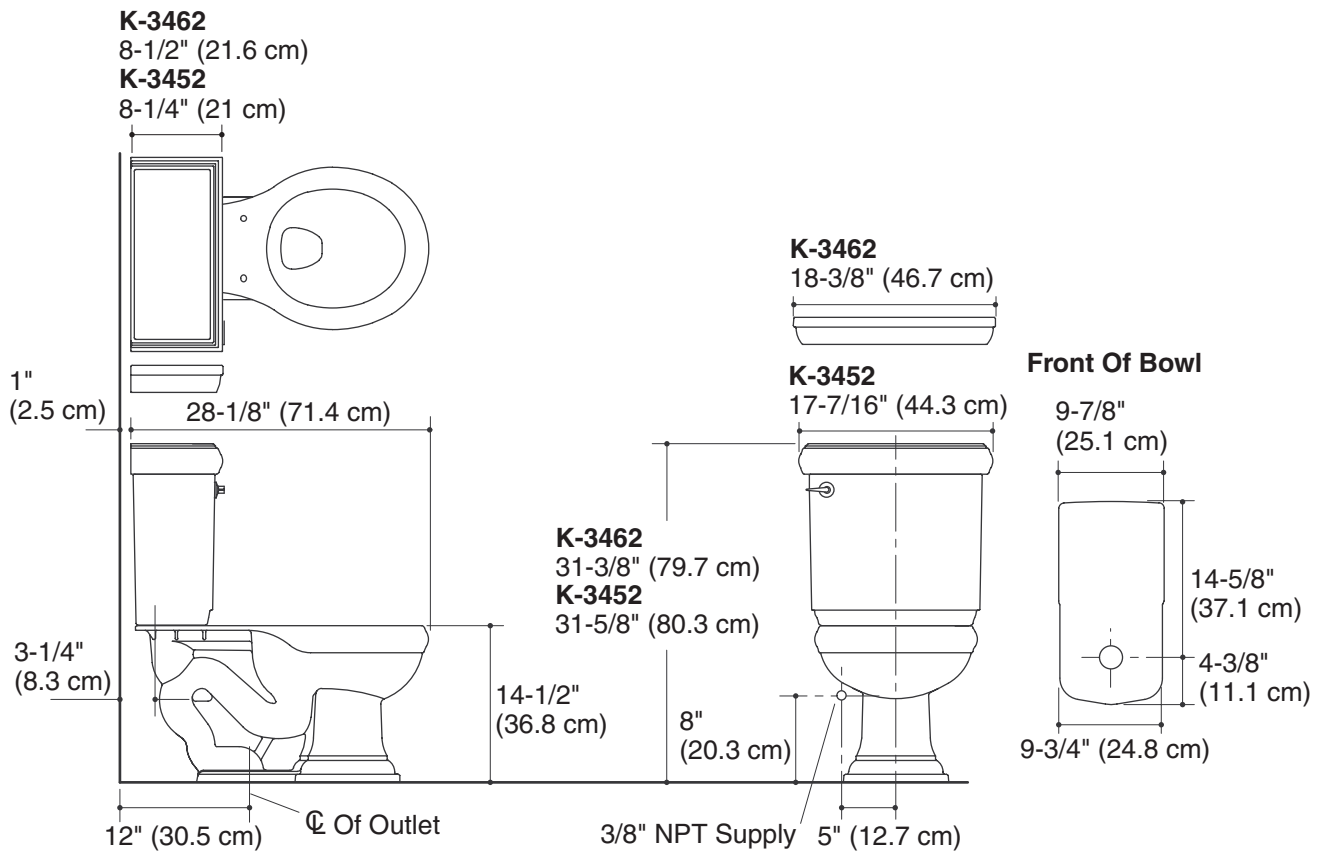

## Product Diagram