

**OVERHEAD RAIN SHOWER
K-8030**


Features

- Available 54 nozzle configuration
- 2.5 gallons (9.5 L) per minute maximum flow rate from each spray head [at 80 psi (552 kPa)]
- 1/2" NPT connections

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ASME A112.18.1/CSA B125.1
- IAPMO/UPC
- Energy Policy Act of 1992 (EPACT)

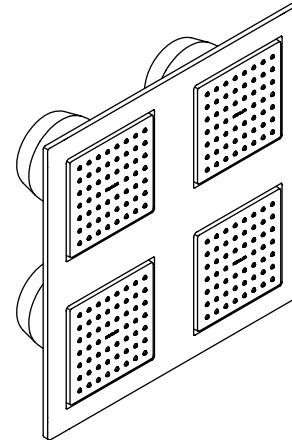

Colors/Finishes

- CP: Polished Chrome
- Other: Refer to Price Book for additional colors/finishes

Specified Model

Model	Description	Colors/Finishes	
K-8030	54 nozzle overhead rain shower	<input type="checkbox"/> CP	<input type="checkbox"/> Other _____


Product Specification

Overhead rain shower shall feature 54 nozzle spray configuration for each spray head. Product flow rate shall be 2.5 gallons (9.5 L) per minute maximum at 80 psi (552 kPa) for each spray head. Product shall have 1/2" NPT connections. Overhead rain shower shall be Kohler Model K-8030-_____.

WATERTILE™ RAIN

Installation Notes

Install this product according to the installation guide.

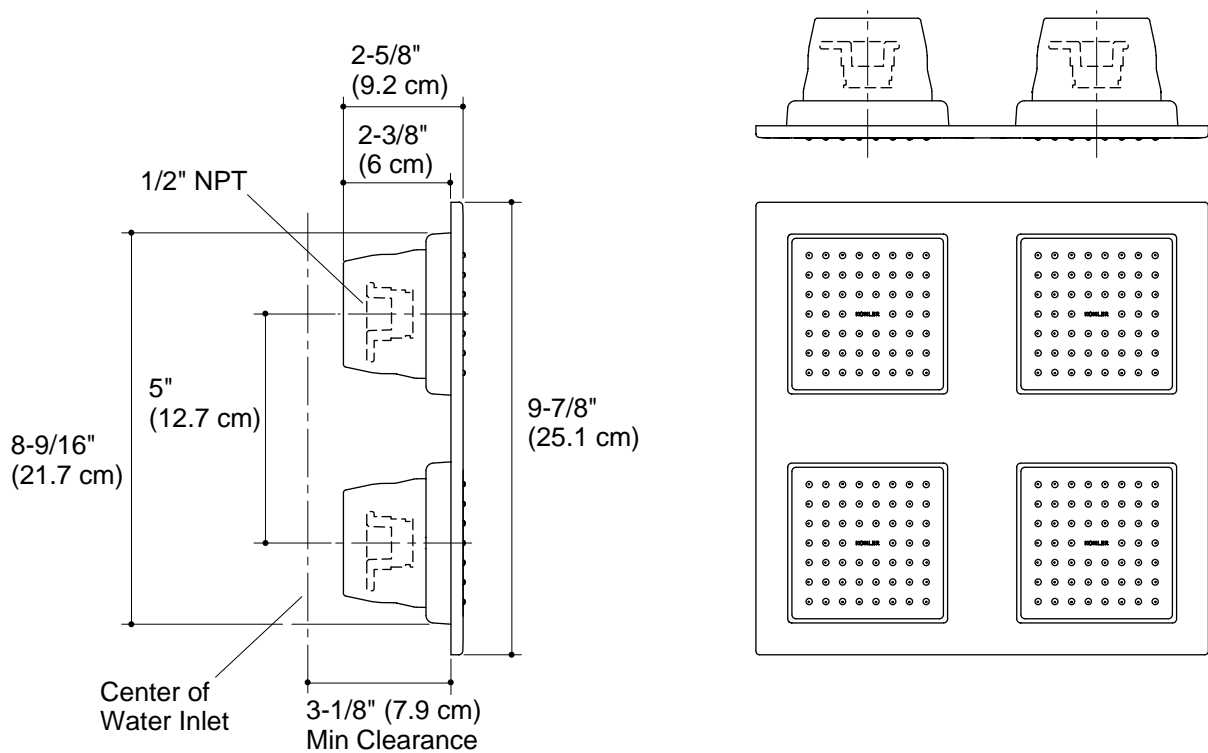

Product Diagram