

# LEUCOS®

LEUCOS USA - INSTRUCTIONS FOR INSTALLATION

## GLO' Ceiling



A1 Enclosed



Two installers



Save instructions

Revised  
19 October 2004


IP20



For self-shielded tungsten halogen lamps.



0.5m Minimum distance between lamp and objects



t 150 °C

**WARNING:** - Disconnect power before installation. - Fixture to be installed by a certified electrician.- Install in accordance with the national and local electrical codes.- Take great care to avoid scratching or chipping the glass when carrying out the operations below.

**ATTENTION:** The manufacturing of the GLO' glass reaches extreme conditions regarding the ability to manufacture hand blown Murano glass. The exceptional extension of the crystal falling by gravity from a height of 3 meters, as well as the instant cooling and heating of the glass in order to carefully measure the width of the neck, lead to the physical and therefore natural presence of bubbles, streaks (stretched bubbles) and natural opacity due to the presence of soda. Therefore, the presence of these physiological elements should not be considered a defect, but rather a characteristic of the glass and a guarantee of its handcraft authenticity.

- Fig.1.** Install structure "A" on the J-Box. by using the four slots "B". Take care to guide the supply wires through the hole "C" provided.
- Fig.1.** Connect supply wires to the terminal block "D". Be careful to check the correct polarity.  
**Please note:** the length of the wire cannot be altered.
- Fig.2.** Cover the wire housing with the metal cone "E" and lock it on the structure by the two side screws.
- Fig.2** Insert the bulb into the lampholder through the opening "F" provided.
- Fig.2-3** Install glass "G" on the flat arm of the structure, as shown, then make sure the installation by tightening the sphere "H" on the threaded top.
- Restore power.

GLO'- GU10 - 1x50W 120V twinline 

### CIRCUIT DIAGRAM:

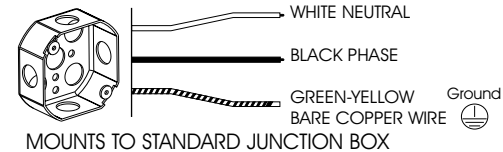


FIG. 1

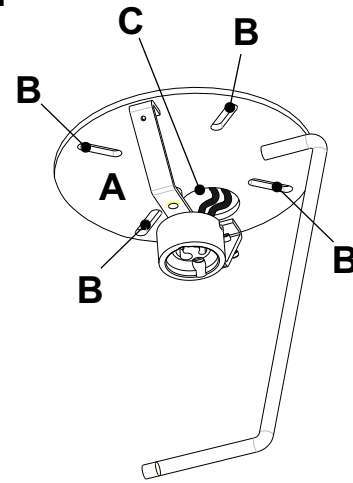


FIG. 2

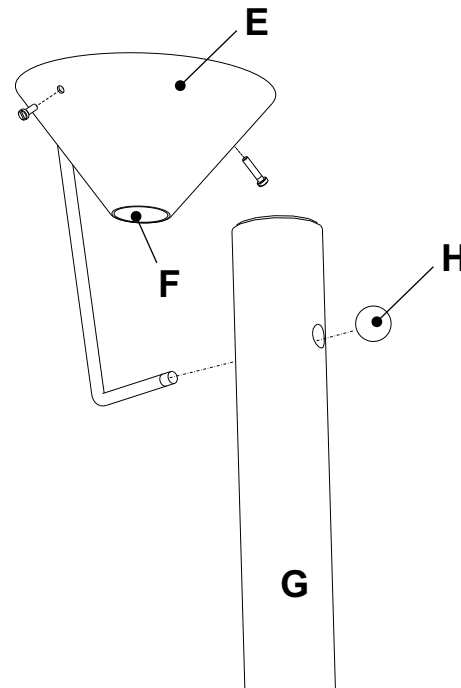


FIG. 3

