

Weblink
123

Project page
378

Design
Poul Henningsen

Concept
PH 5 (1958) provides a glare free illumination. The design of the visible reflectors ensures that light is directed both vertically and horizontally. Light is diffused through a sandblasted glass shield located in the lower shade. The inside cone is painted red, and together with the small blue reflector creates a warmer tone of light.


Finish
White or graphite grey, wet painted.

Material
Shades: Spun aluminum. Concealing shield: Sand-blasted, glass. Struts: Matte chrome plated or purple, rolled aluminum.

Mounting
Canopy: White. Cord type: 3-conductor, 18 AWG white PVC power cord. Cord length: 12'.

Weight
Max. 5 lbs.

Label
cUL, Dry location. IBEW.

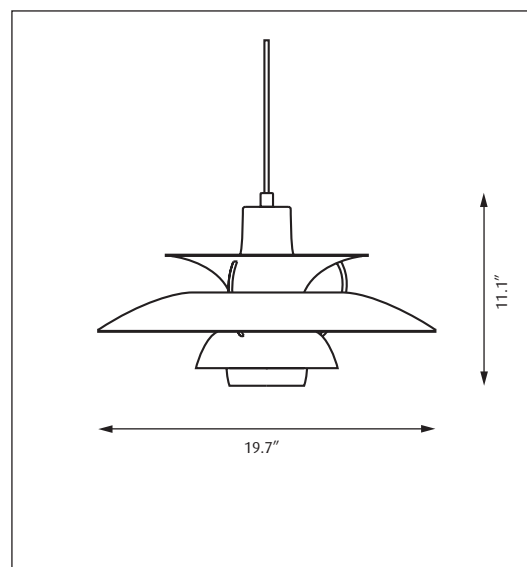

Product code	Light source	Voltage	Finish
PH5	1/23W/CF medium 1/200W/A-23/IF medium	120V	GRP GREY WHT

Specification notes:
a. CF variants provided with a 1/23W/CF medium base self-ballasted lamp in 120V.

Info notes:
I. Graphite grey variant is only available with matte chrome plated struts.
II. White variant is only available with purple struts.
III. The comparable EU version has the following classification: Ingress Protection Code: IP20.





Hanzlik House, Lake Travis

Austin, Texas, USA

Architect

Donlyn Lyndon

Lighting Designer

Richard G. Peters /
O'Mahony & Myer Electrical Engineering
& Lighting Design

Photo

Jacob Termansen