

table

<p>D12 EL</p> <p>35W /12V Halogen-frosted Bi-Pin T-3 GY6.35</p>	<p>D12 EL pt.</p> <p>35W /12V Halogen-frosted Bi-Pin T-3 GY6.35</p>	<p>D12 EL pi.</p> <p>35W /12V Halogen-frosted Bi-Pin T-3 GY6.35</p>
--	--	--

floor

D12 EL t.

35W /12V
Halogen-frosted
Bi-Pin T-3 GY6.35

wall


D12 EL a.45

35W /12V
Halogen-frosted
Bi-Pin T-3 GY6.35

D12 EL a.pi.

35W /12V
Halogen-frosted
Bi-Pin T-3 GY6.35

low-voltage current reaches lamp through the rods with no electrical cable

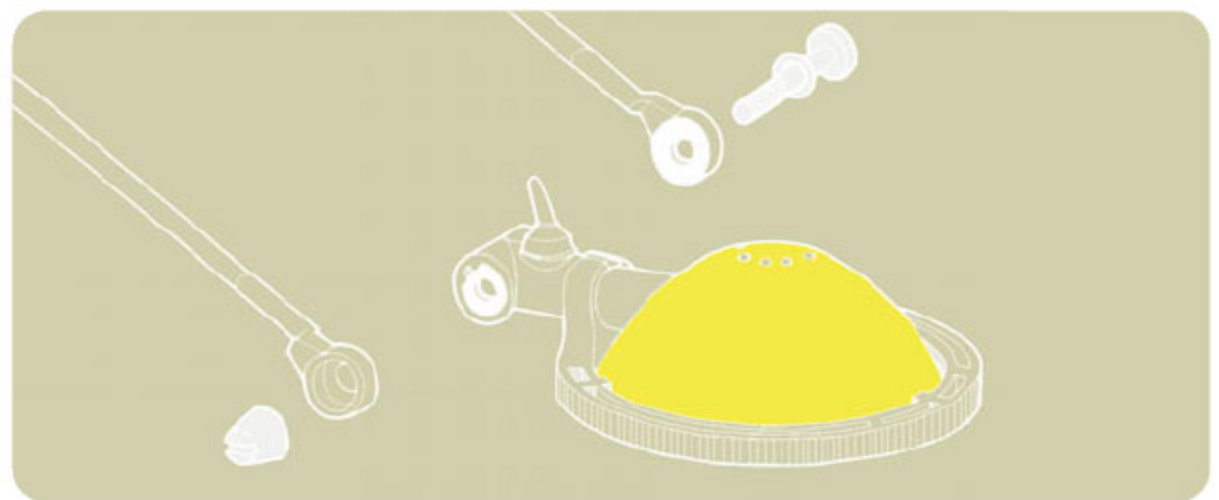

materials

aluminium body reflector in metal or pressed glass with white enamelled interior die-cast aluminium metal parts rynite head anti-UV protection glass

structure finishes



glass reflector finishes

metal reflector finishes

