


September 2007

MAXTRIX™

675 E. Washington Ave, Bridgeport, CT 06608

WEB-SITE: WWW.MAXTRIXKIDS.COM

ASSEMBLY SHEET FOR ARTICLE# 1910 CASTLE BED KIT Parts List

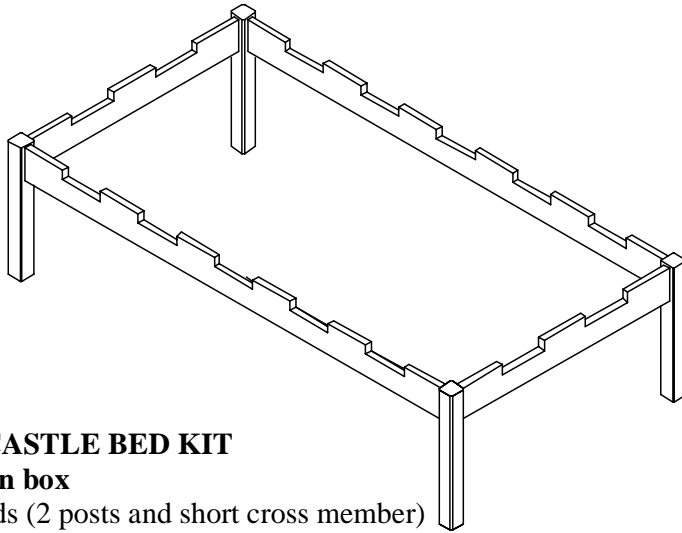

ARTICLE #1910 CASTLE BED KIT

Main components in box

2 x 21060 Castle ends (2 posts and short cross member)

2 x 21061 Castle long cross member

Wood parts bags

4 x 21003 17mm Wedge shape wood plug

Hardware parts bags

8 x 20015 M8 110mm hex bolt

8 x 20019 M8 Cross dowel

4 x 20010 Leg bolt

8 x 20011 Cylinder for set screw

8 x 20012 Set screws

4 x 20009 Washer 2 x 21067 Tray sides


Tools needed: Phillips screwdriver, Flat head screwdriver, Rubber hammer

Important Assembly Notes

Assembly of Castle Bed Kit.

Complete the assembly of the twin bed, before mounting the 2 short end kits on top of the bed.

Insert the cylinder barrels into the 4 large holes on the inside face of the Bed Ends. Make sure the cylinder barrels bolt hole is pointed upwards and the slotted face is facing outward.

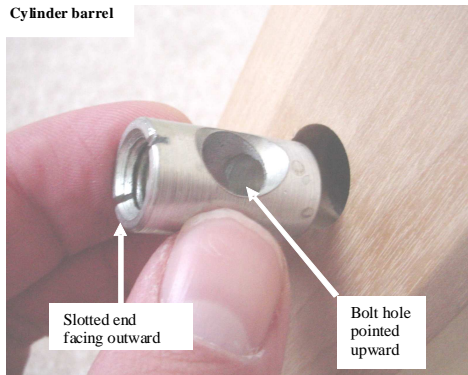

Insert the leg bolt through the washer and into the hole on top of the bed end.



Hereafter screw the set screw into the cylinder barrel screw hole with the hex wrench until tight. Make sure that when tightened, the leg bolt is completely affixed and will not move.

Note: If for some reason, the set screw is unable to hit the “sweet spot” to affix the leg bolt, due to the leg bolt not reaching deep enough, we have built in a fail safe mechanism - simply remove the washer and try again. In this case, - make sure the set screw point can penetrate the neck of the bolt (on both ends of the bolt) - before tightening.

Complete this for all holes on top of the bed ends. Once completed, insert the remaining 4 cylinder barrels into the 4 holes in the 4 holes of the 2 bed ends. 4 posters. Screw the set screws into the cylinder barrel screw holes with the hex wrench until tight. Complete this procedure for

all 4 poster legs. If done correctly, the poster legs will now be rock solid, with very little shaking.

Finally add long cross members in between the posts, / use bolts and cross dowels to affix. Tighten with hex wrench.

Replacement Parts:

Replacement Parts, including additional guard rails, may be obtained from any of our dealers.

THANK YOU FOR PURCHASING MAXTRIX™

IMPORTANT:

ALWAYS REMEMBER TO CHECK AND TIGHTEN LOOSE BOLTS/HARDWARE EVERY MONTH, AS THESE MAY LOOSEN WITH USE OVER TIME.