

PRODUCT DESCRIPTION

- Brass construction w/chrome plated finish
- 1" IPS supply
- 1 1/2" top spud

OPERATION

- Adjustable sensor eyes
- Battery powered (4) AA
- Self-diagnostic electronics
- Piston flushing mechanism
- Low battery indicator light

FLOW

- Operating pressures 10 to 125 psi
- 1.6 gpf (gallons per flush)
- 24 hour sentinel flush
- Manual override button

VALVES


- 1" IPS angle stop (vandal resistant)
- Self cleaning filter system

STANDARDS

- Third party certified by IAPMO and CSA to meet ASME A112.19.2M and all applicable requirements referenced therein and complies with requirements of ASSE 1037 warranty


WARRANTY

- Warranted 1 year for electronic components and 5 years for all other components against material or mfg defects.



1 1/2" Battery Powered Exposed Style Closet Flush Valve

Model: 8310

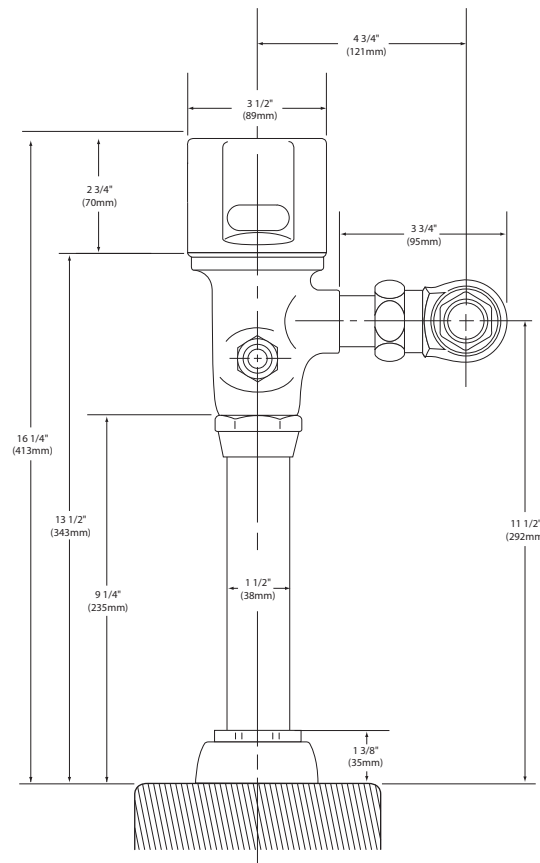

CRITICAL DIMENSIONS

(DO NOT SCALE)