


# Assembly Instructions For

# OLPL6907

(E) 1/09

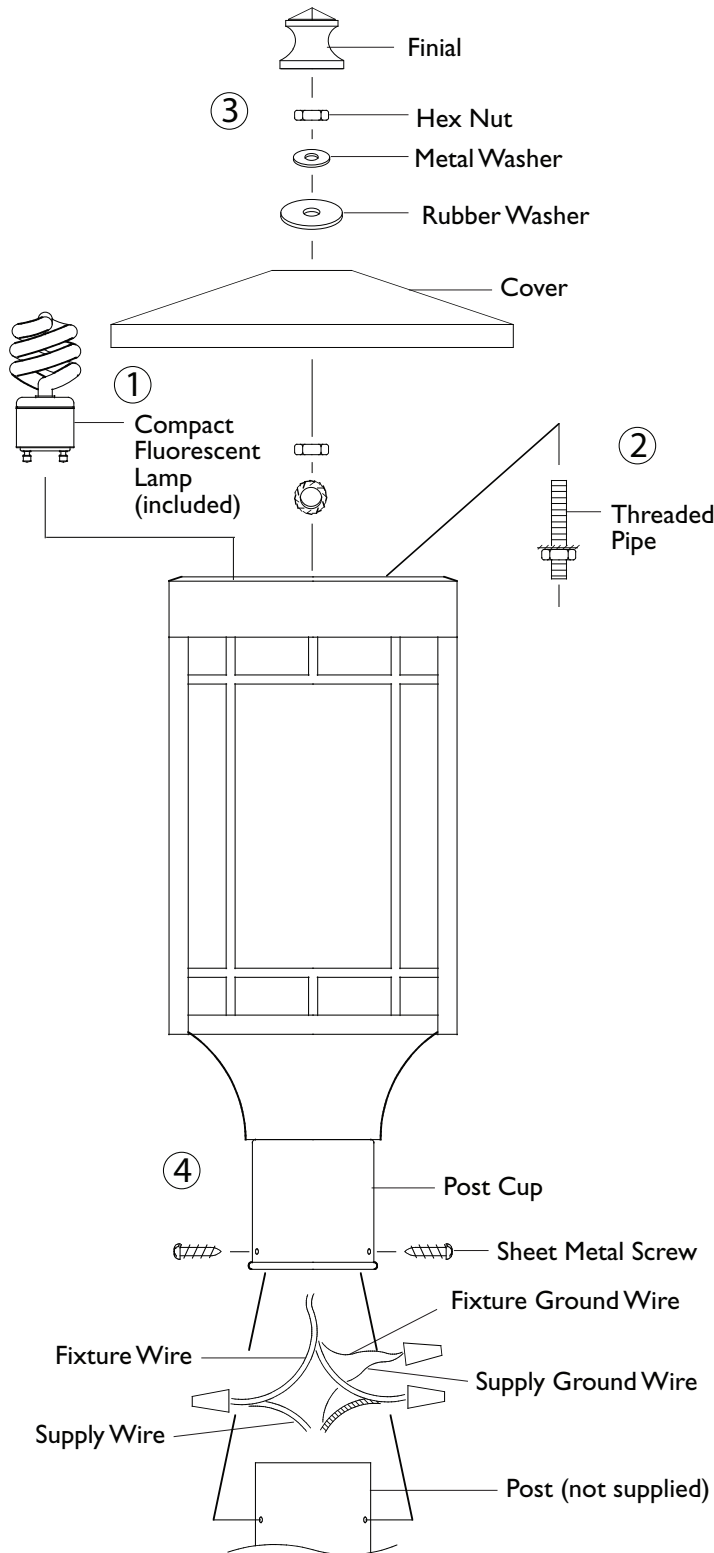


## IMPORTANT TURN OFF THE POWER AT THE MAIN FUSE OR CIRCUIT BREAKER BOX BEFORE STARTING INSTALLATION

Carefully unpack and identify all parts before assembly. Bulb not included.

1. Install compact fluorescent lamp by inserting into slots in socket base, and then twist and lock. See illustration.
2. A. Attached a hex nut onto one end of threaded pipe leaving about 1/2" (13mm) thread exposed.  
B. Insert other end of the pipe from below into center hole of bridge, which is located at top section of main frame.  
C. Fasten the pipe from above with lock washer and hex nut.
3. A. Install cover by fastening with rubber washer, metal washer, and hex nut.  
B. Install finial by screwing onto protruding threaded pipe.
4. Electrical installation onto post: If you are replacing an existing fixture, disconnect and remove old fixture.  
A) Slip post cup over post. Mark position of holes in post cup on post.  
B) Remove post cup and expose the supply wiring from above post. Drill 1/8" (3mm) diameter pilot holes in post at places where marked.  
C) Make wire connections. (wire connectors not provided). Refer to chart below for correct connections. Wire supply wires to fixture wires accordingly.

Connect Black Fixture Wire to:	Connect White Fixture Wire to:
Black Supply Wire or	White Supply Wire or
*Parallel cord (round & smooth)	*Parallel cord (square & ridged)
Clear, Brown, Gold or Black without tracer	Clear, Brown, Gold or Black with tracer
Insulated wire (other than green) with copper conductor	Insulated wire (other than green) with silver conductor

\*Note: When parallel wire (SPT 1 & SPT2) is used. One wire is square shaped or ridged and the other wire will be round in shape or smooth. (See Illustration)



- D) Connect ground wire from supply source to fixture ground wire with connector. Never connect ground wire to black or white power supply wires. Carefully place wires inside post.
- E) Slip post cup onto post. Align holes in post cup with holes in post. Attach post cup to post with sheet metal screws.


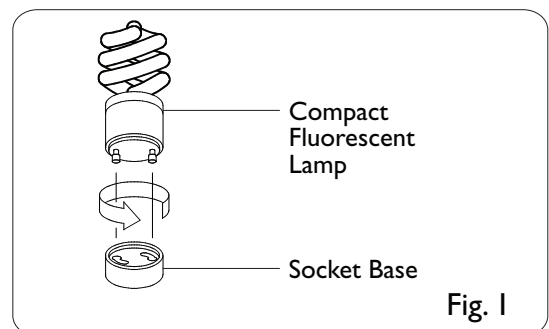


Fig. 1



**MURRAY  
FEISS**

Generation Brands™