


Regulus system

Design | Giancarlo Fassina,
Carlo Forcolini

The Range consists of fittings supplying either direct or indirect, high performance, low energy illumination. Wall or ceiling mounted models for any height requirement. Two different diffusers (direct or indirect distribution) guarantee high output and a particularly pleasing visual effect.
Mounting | Wall and ceiling mount. Suitable for installation on normally inflammable surfaces. Can be mounted to 4" octagonal junction box.
Dimming | Dimming ballasts available on all 54W, Regulus.
Please specify Voltage
Materials | Extruded or die-cast aluminum, extruded acrylic.
Finishes | Metal parts in silver grey, white screen-printed diffuser

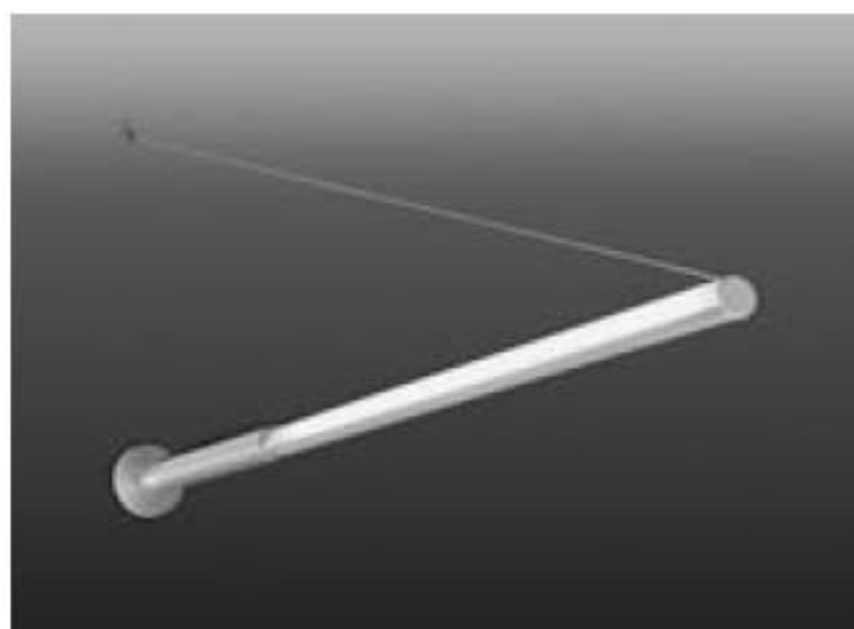

REGULUS PARETE SB (left) Direct or indirect illumination

- 47" length, 1x24W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt
- 59" length, 1x39W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt
- 71" length, 1x54W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt

REGULUS PARETE (up) Direct or indirect illumination

- 72" length, 2x24W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt
- 96" length, 2x39W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt
- 120" length, 2x54W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt



REGULUS TIGE Direct or indirect illumination

- Standard heights 10", 18", 62"
- 72" length, 2x24W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt
- 96" length, 2x39W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt
- 120" length, 2x54W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt
- Custom heights available | 98" maximum

REGULUS TIGE CORTA Direct illumination

- Height 4" (not illustrated)
- 72" length, 2x24W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt
- 96" length, 2x39W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt
- 120" length, 2x54W, T5HO, fluorescent, electronic ballast, universal voltage 120/277 Volt