

STEMMA WIDESPREAD FAUCET, MODEL 5339.801

- Contemporary minimalist styling
- Includes faucet mounting kit, and all-metal pop-up drain assembly to accommodate European and US china
- Cast brass construction
- Quarter-turn washerless ceramic disc valve cartridges
- Installs on 6" to 12" (152mm to 305mm) centers

□ Specify finish: chrome or stainless steel



Maximum Flow Rate: 2.2 gpm (8.3 L/min.)

Low Lead: Meets NSF 61/Section 9 & Prop 65 lead requirements



CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASME A112.18.1

CSA B125

NSF 61/ Section 9

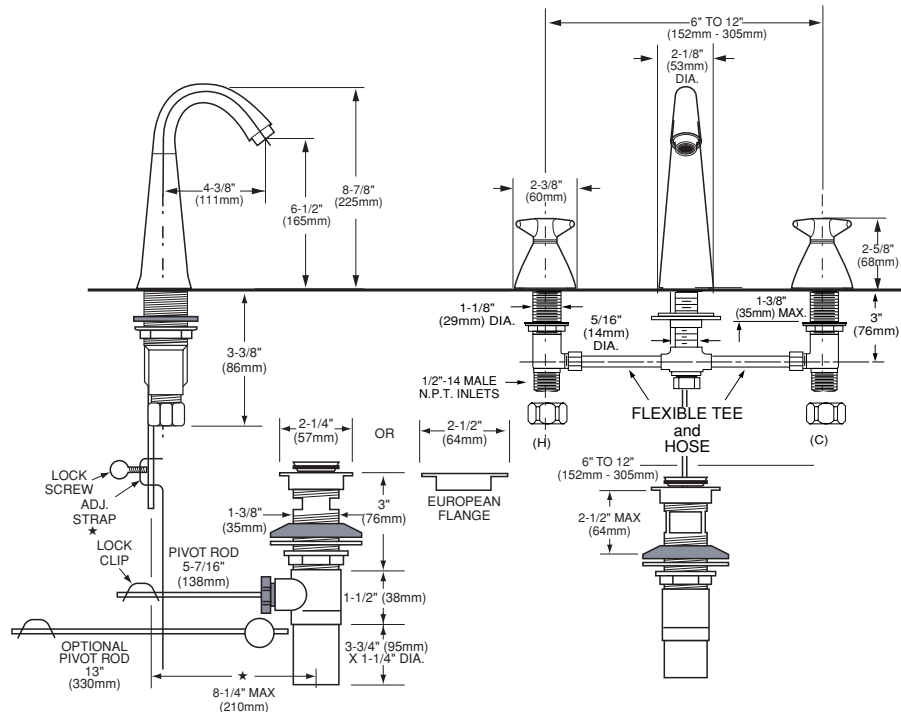

NOTE:

★ MINIMUM ROUGHIN IS OBTAINED WITH ESCUTCHEON ADAPTER THREADED SOCKETS INSTALLED WITH THREADED SECTION FACING CASTING, AND FAUCET STEM ADAPTER GROOVED SECTION FACING CASTING; MAXIMUM ROUGHIN IS OBTAINED BY REVERSING POSITIONS OF THREADED SOCKETS AND FAUCET STEM ADAPTERS.