

REPRISE TWO-HANDLE THERMOSTATIC VALVE, MODEL 5535.540

- Classic Victorian styling
- Coordinated accessories available
- May be used as bath/shower control with optional diverter valve installation kit
- Cast brass construction
- Cross handle controls on/off and volume
- Porcelain lever handle sets and automatically maintains water temperature
- Includes adjustable hot limit safety stop
- Includes escutcheon plate and plaster guard
- 3/4" NPT inlets and outlets

- ☐ Specify assembly finish: chrome, polished brass, polished nickel, or brushed nickel



Extension Kits



- ☐ **963234-0070A** Thermostatic Valve Extension Kit

Maximum Temperature Limit: 112° F
Flow Rate: 13 gpm (49.3 L/min. @40 psi)

CODES AND STANDARDS

These products meet or exceed the following codes and standards:

ASSE 1016
ASME A112.18.1
CSA B125

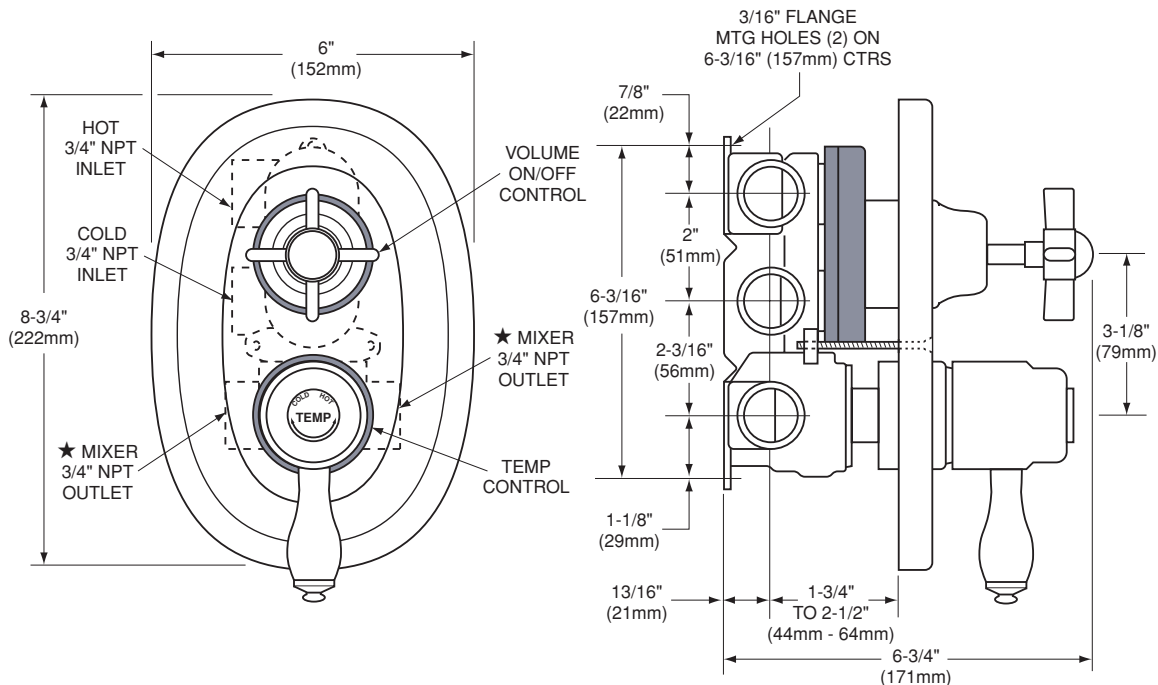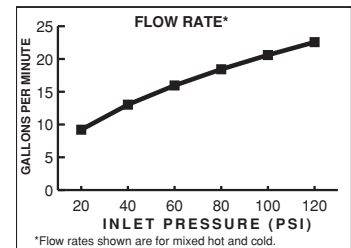

NOTES:

- ★ BOTH MIXER OUTLETS ARE USED ONLY WHEN OPTIONAL BATH/SHOWER DIVERTER IS INSTALLED; OTHERWISE, PLUG UNUSED OUTLET WHEN MIXER IS USED AS BATH OR SHOWER CONTROL.
- ★★ REQUIRES TWIN ELL WHEN USED WITH DIVERTER TUB SPOUT