

## LAGARO™ FREE STANDING BATHING POOL, KIT# 65240

- Contemporary free-standing bath design
- Eurocast reinforced construction with bonded acrylic interior surface finish
- Contoured for lumbar support
- Adjustable levelling feet with decorative covers
- Bath tub exterior can be customized to match bath decor. Recommend acrylic based paint
- Deck mounted faucets require drilling to be done by customer
- Interior finish available in white
- Made in England



### Kit Components:

- 60240** Lagaro Free Standing Bathing Pool Only
- 85200** Lagaro Tub Feet (4)

### **Nominal Dimensions:**

66-1/2" x 31" x 23-7/8" (1689 x 787 x 606mm)



### **Compliance Certifications – Meets or Exceeds the Following Specifications:**

- ANSI Z124.1 for Plastic Bathtubs
- ASTM E162 for Flammability
- NFPA 258 for Smoke Density

### **To Be Specified (Required):**

- Color
- Bath Filler: (specify finish)
- Exposed Lever Center Drain (chrome): 85070

ROUGH IN DIAGRAM AND  
PRODUCT SPECIFICATIONS  
SHOWN ON REVERSE SIDE

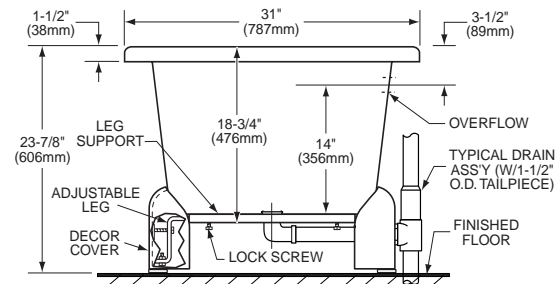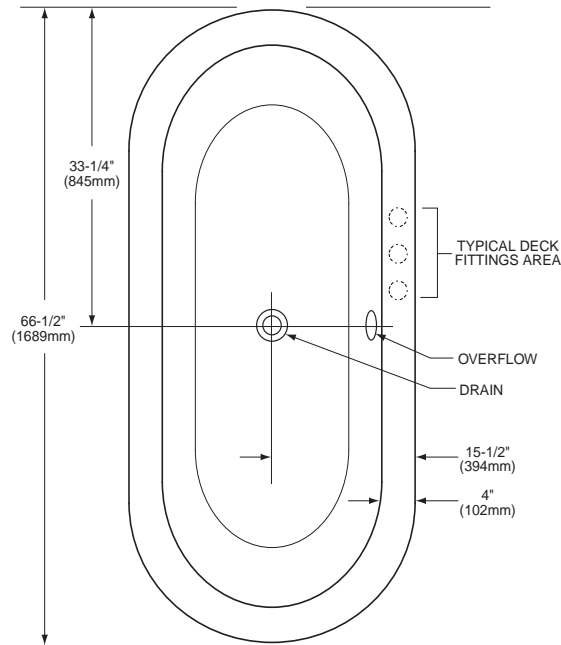

### GENERAL SPECIFICATIONS FOR 65240 BATHING POOL

INSTALLED SIZE	66-1/2" x 31" x 23-7/8" (1689 x 787 x 606mm)
WEIGHT	135 Lbs. (61 Kg)
WEIGHT W/WATER	718 Lbs. (326 Kg)
GALLONS TO OVERFLOW	70 Gal. (265 L)
BATHING WELL AT SUMP	46" x 16" (1168 X 406mm)
BATHING WELL AT RIM	58-3/4" x 23" (1492 x 584mm)
WATER DEPTH TO OVERFLOW	14" (356 mm)
FLOOR LOADING (PROJ. AREA)	50.2 Lbs./Sq. Ft. (245 Kgs/Sq. m)
POINTS	2
CARTON VOLUME	51 Cu. Ft. (1.44 Cu. m)
CARTON SHIPPING WEIGHT	300 Lbs. (136 Kg)

#### NOTES:

BATH CAN BE INSTALLED EITHER ABOVE OR BELOW FLOOR LINE AS PIER, ISLAND OR PENINSULA TYPE INSTALLATION. SUMP OF BATH IS SUPPORTED BY INTEGRAL FEET. NO ADDITIONAL SUPPORT REQUIRED. ENCLOSING MATERIALS BY OTHERS.

● IF INSTALLING A DECK-MOUNTED FITTING, BEFORE DRILLING ANY HOLES: CHECK FOR INTERFERENCE WITH CIRCULATING SYSTEM PIPING AND DRAIN OVERFLOW. MOUNTING HOLES DRILLED BY INSTALLER.

■ REFER TO INSTALLATION INSTRUCTIONS SUPPLIED WITH WHIRLPOOL FOR ADDITIONAL INFORMATION. FITTINGS NOT INCLUDED AND MUST BE ORDERED SEPARATELY. PROVIDE SUITABLE REINFORCEMENT FOR ALL SUPPORTS.

IMPORTANT: Dimensions of fixtures are nominal and may vary within the range of tolerances established by ANSI Standard Z124.1. These measurements are subject to change or cancellation. No responsibility is assumed for use of superseded or voided leaflet.