

HID


**Rectangular  
Roadway**

**Commercial Outdoor**

Type \_\_\_\_\_  
-20  
PSL003

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	Bronze		A	B	C
PSL003	-20	MH (m) 250w ED17	16-1/4	23-1/2	8

Note: A is width, B is length (less arm, which is 4" long), and C is depth.

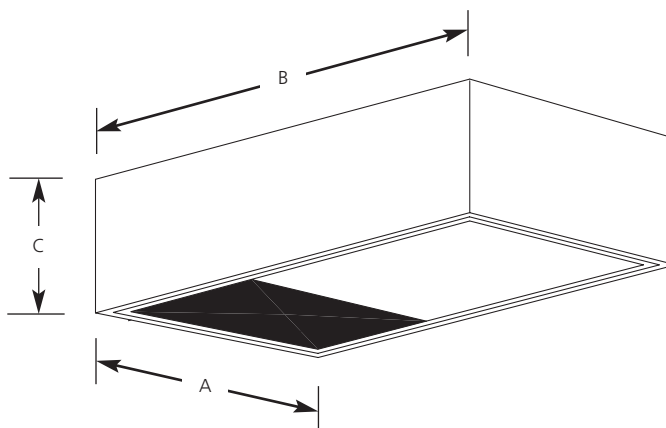

**Specifications:**

Housing

- Single piece formed and welded aluminum box style housing
- Hinge gasketed extruded door with rigid corner bracing and cast zinc latches.
- Hydroformed one piece aluminum reflector
- Flat tempered clear glass lens, sealed into door
- Bronze powder coated finish
- EPA (Effective Projected Area) - 1.9 sq. ft. (0.6 sq. meters)
- Weight = 42 lbs. (19.1 ks)

Optics

- Type III distribution pattern
- Designed for full cutoff classification.

Mounting

- Post side - (Order pole separately, PP4207-20)

Mounting (cont.)

- Includes 6" Rigid Arm for mount to square pole
- Uses #2 arm drill pattern (2-bolt)

Electrical

- HPF 120/208/240/277v Magnetic ballast
- Prewired for 277v
- Rated for -30 degree starting temperature
- Medium based 4 KV rated porcelain sockets

Labeling

- UL-CSA wet location listed