



Incandescent


Broadway Lights
Economy Lights

Bath & Vanity

Type _____

	-10	-15
P3114	<input type="checkbox"/>	<input type="checkbox"/>
P3115	<input type="checkbox"/>	<input type="checkbox"/>
P3116	<input type="checkbox"/>	<input type="checkbox"/>
P3117	<input type="checkbox"/>	<input type="checkbox"/>
P3118	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish		Lamping	Dimensions (Inches)	
	Polished Brass	Polished Chrome		A	B
P3114	-10	-15	3 (m) 60w	24	4-1/4
P3115	-10	-15	4 (m) 60w	30	4-1/4
P3116	-10	-15	5 (m) 60w	36	4-1/4
P3117	-10	-15	6 (m) 60w	48	4-1/4
P3118	-10	-15	8 (m) 60w	60	4-1/4

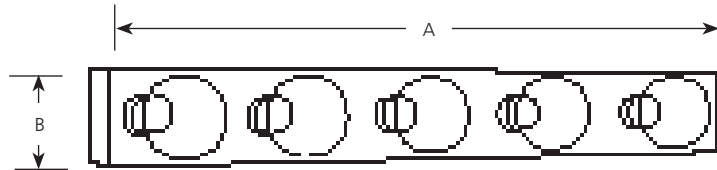

Specifications:

General

- Polished Brass (-10) and Polished Chrome (-15) face plates available
- Steel construction
- Sockets are covered with matching socket cups
- Socket spacing is 7-1/2" on centers
- Medium based G lamps recommended

Electrical

- Medium based phenolic sockets
- Pre-wired with sockets in place

Labeling

- UL-CUL listed

Mounting

- Wall mount
- Ceiling mount only using 25 watt lamps
- Full length back plate covers outlet box
- Unit can be direct wired without outlet box

Progress Lighting
Post Office Box 5704
Spartanburg, South Carolina
29304-5704

www.progresslighting.com

Rev. 1/03




Incandescent

Economy Broadway Lights
Aluminum Construction

Bath & Vanity

Type	-10AL	-15AL
P3114	<input type="checkbox"/>	<input type="checkbox"/>
P3115	<input type="checkbox"/>	<input type="checkbox"/>
P3116	<input type="checkbox"/>	<input type="checkbox"/>
P3117	<input type="checkbox"/>	<input type="checkbox"/>
P3118	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish		Lamping	Dimensions (Inches)	
	Polished Brass	Polished Chrome		A	B
P3114	-10AL	-15AL	3 (m) 60w	24	4-1/4
P3115	-10AL	-15AL	4 (m) 60w	30	4-1/4
P3116	-10AL	-15AL	5 (m) 60w	36	4-1/4
P3117	-10AL	-15AL	6 (m) 60w	48	4-1/4
P3118	-10AL	-15AL	8 (m) 60w	60	4-1/4

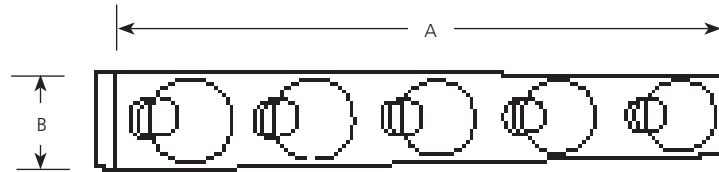

P3116

Specifications:

General

- Polished Brass (-10) is a specular anodized finish, Polished Chrome (-15) is a plated finish
- Aluminum face plate
- Sockets are covered with matching aluminum socket cups
- Back plate is protected steel
- Socket spacing is 7-1/2" on centers
- Medium based G lamps recommended

Electrical

- Pre-wired with sockets in place
- Medium based phenolic sockets

Labeling

- UL-CUL listed

Mounting

- Wall mounted
- Ceiling mount only using 25 watt lamps
- Full length back plate covers a standard 4" recessed octagonal outlet box
- Unit can be direct wired without an outlet box

Progress Lighting
Post Office Box 5704
Spartanburg, South Carolina
29304-5704

www.progresslighting.com