



Fluorescent

Standard
White Diffuser
Standard Ballast


Undercabinet

Type _____

-30

P7009

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	White		A	B	C
P7009	-30	F40 or F34T12	48	1-3/4	5-1/4

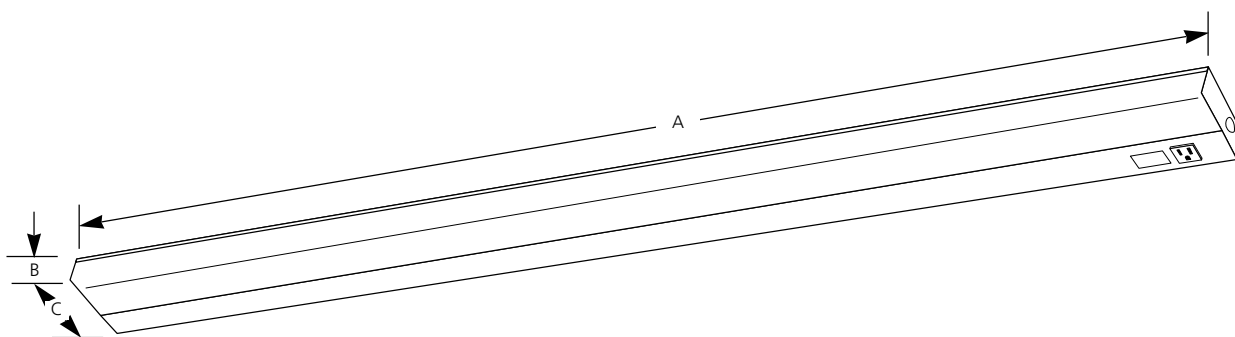

Specifications:

General

- Trim, energy efficient fluorescent
- White baked enamel housing
- White acrylic diffuser
- Diffuser snaps securely into place without the use of tools
- Steel chassis and ballast cover

Electrical

- Standard 120V NPF ballast on P7009-30
- K.O. for switch and G.C.O. (P8608-30 accessory)

Labeling

- UL-CUL damp location listed

Mounting

- End KO's for continuous row mounting

Progress Lighting
Post Office Box 5704
Spartanburg, South Carolina
29304-5704

www.progresslighting.com

Rev. 3/01



Fluorescent

Standard
White Diffuser
Electronic Ballast


Undercabinet

Type _____

-30EB

P7009

Catalog No.	Finish	Lamping	Dimensions (Inches)		
	White		A	B	C
P7009	-30EB	F32T8	48	1-3/4	5-1/4

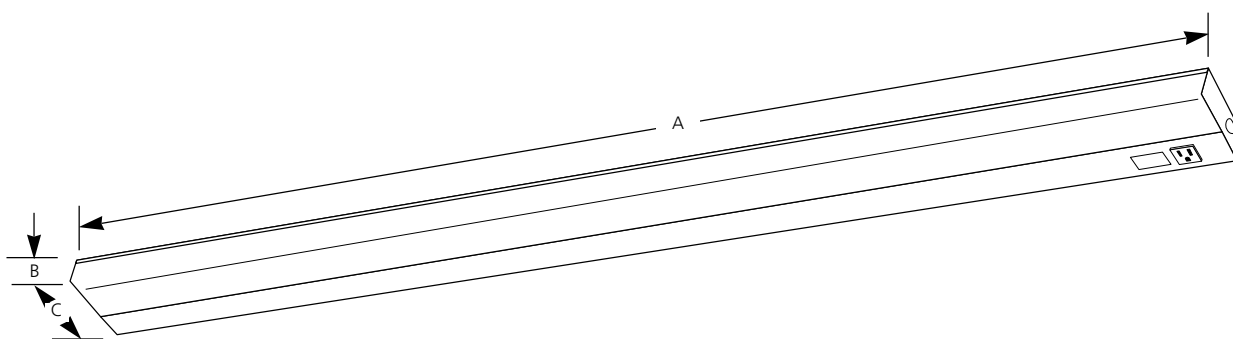

Specifications:

General

- Trim, energy efficient fluorescent
- White baked enamel housing
- White acrylic diffuser
- Diffuser snaps securely into place without the use of tools
- Steel chassis and ballast cover

Electrical

- Electronic 120/277V HPF ballast
- K.O. for rocker switch (P8603-01) and G.C.O. (P8608-30 accessory)

Labeling

- UL-CUL damp location listed

Mounting

- End KO's for continuous row mounting

Progress Lighting
Post Office Box 5704
Spartanburg, South Carolina
29304-5704

www.progresslighting.com

Rev. 3/01