


Type	_____	
	-30	-30EB
P7010	<input type="checkbox"/>	<input type="checkbox"/>
P7011	<input type="checkbox"/>	<input type="checkbox"/>

Catalog No.	Finish		Starter Switch	Lamping	Dimensions (Inches)		
	White	White			A	B	C
P7010	-30	-30EB*	Yes	1-F13T5	5	21	1
P7011	-30	-30EB*	No	1-F13T5	5	21	1

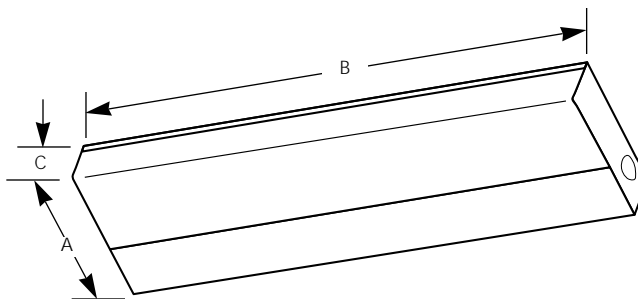

Specifications:

General

- Trim, energy efficient fluorescent
- White baked enamel housing
- White acrylic diffuser
- Diffuser snaps securely without the use of tools
- Steel chassis and ballast cover

Mounting

- Flush mounted under cabinets and shelves, over a desk, in a kitchen or work area
- 1/2" KO's in ends for continuous row mounting or end electrical feed
- 1/2" KO in back for electrical feed
- Keyhole slots on top for ease of mounting

Electrical

- Standard 120v NPF ballast on P7010-30 & P7011-30
- Electronic 120v NPF ballast on P7010-30EB & P7011-30EB
- Starter switch furnished on P7010-30 & -30EB
- KO for starter switch on P7011-30 & -30EB
- KO for G.C.O. (P8608-30 accessory) on all

Labeling

- UL-CUL damp location listed

* Non-stock