


INSTALLATION INSTRUCTIONS

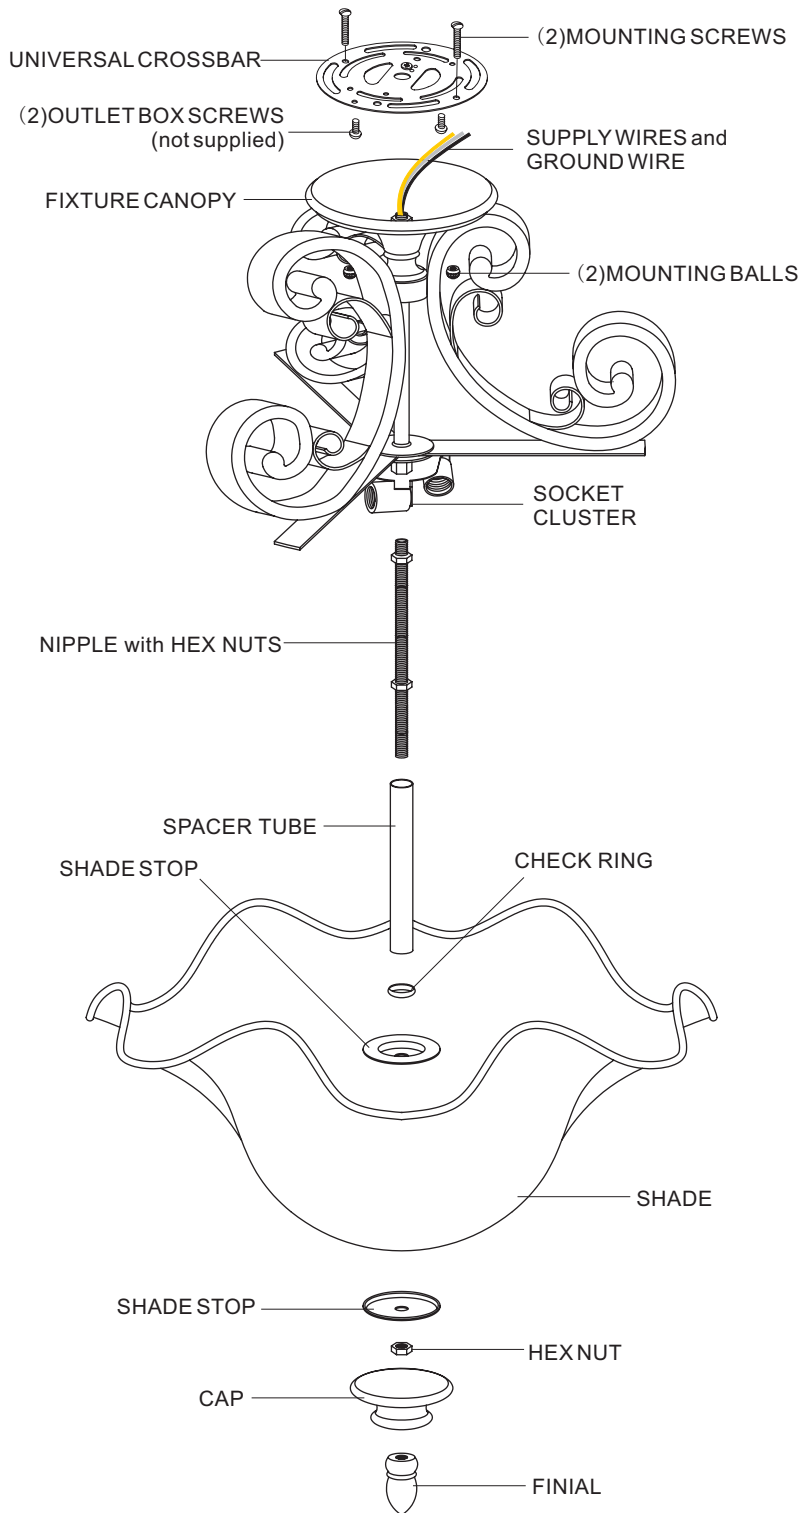

1. Before beginning the installation , carefully unpack and identify all parts , referring to the illustration.
2. Turn the electrical power to installation point OFF at the circuit breaker .
3. Locate the NIPPLE with HEX NUTS. Thread the top end of the NIPPLE onto the hex coupling underside of the SOCKET CLUSTER. Use plier, thread the HEX NUT against the hex coupling and hand tighten until snug.
4. Remove another HEX NUT from the NIPPLE. Position the SPACER TUBE and CHECK RING over the NIPPLE. And then thread the HEX NUT back onto the NIPPLE to secure them. Hand tighten until snug. Proceed to locate the SHADE STOP, SHADE, and SHADE HOLDER over the end of the nipple and secure with the the rest HEX NUT. Hand tighten until snug.
5. Locate the CAP over the end of the NIPPLE and secure with the FINIAL. Hand tighten until snug.
6. Locate the (2) MOUNTING SCREWS and thread them into the back of the UNIVERSAL CROSSBAR , making sure that they match the holes in the FIXTURE CANOPY . Using (2) OUTLET BOX SCREWS (not supplied) , fasten the UNIVERSAL CROSSBAR to the OUTLET BOX .
7. **MAKING THE WIRING CONNECTIONS:**
 Using wire connectors (not supplied) connect the HOUSE GROUND WIRE to the FIXTURE GROUND WIRE ; connect the HOUSE WHITE WIRE to the FIXTURE SUPPLY WIRE (WHITE or RIBBED SIDE) ; connect the HOUSE BLACK (or RED) WIRE to the FIXTURE SUPPLY WIRE (BLACK or SMOOTH SIDE) . Wrap each connection with approved electrical tape.
8. Carefully tuck all of the wiring up into the outlet box , and fit the FIXTURE CANOPY over the MOUNTING SCREWS . Secure the FIXTURE CANOPY to the ceiling with the (2) MOUNTING BALLS , making sure that the balls are fully threaded onto the MOUNTING SCREWS before tightening .
9. Install the correct bulbs referring to the fixture markings and/or labels for maximum wattage.
10. Restore power to installation point ON . Retain this sheet for future reference .