


INSTALLATION AND SAFETY INSTRUCTIONS HC-562

WARNING: BE SURE ELECTRICITY TO THE SYSTEM YOU ARE WORKING ON IS SHUT OFF; EITHER THE FUSE REMOVED OR THE CIRCUIT BREAKER IS SET AT OFF. ALL CONNECTIONS MUST BE MADE AND TESTED ACCORDING TO NATIONAL AND LOCAL ELECTRICAL CODES. IF YOU ARE UNCLEAR AS HOW TO PROCEED, CONTACT A QUALIFIED ELECTRICIAN.

1. Thread lamp into socket and slide shroud onto housing.
2. Attach fixture assembly to weather-tight outlet box such as 120v stabilizer stake (#9364-12), (not included).
3. Adjust aiming angle and secure with swivel screw.

NOTE: LENS RETAINING RING IS USED FOR OPTIONAL LOUVERS OR GLASS ACCESSORIES

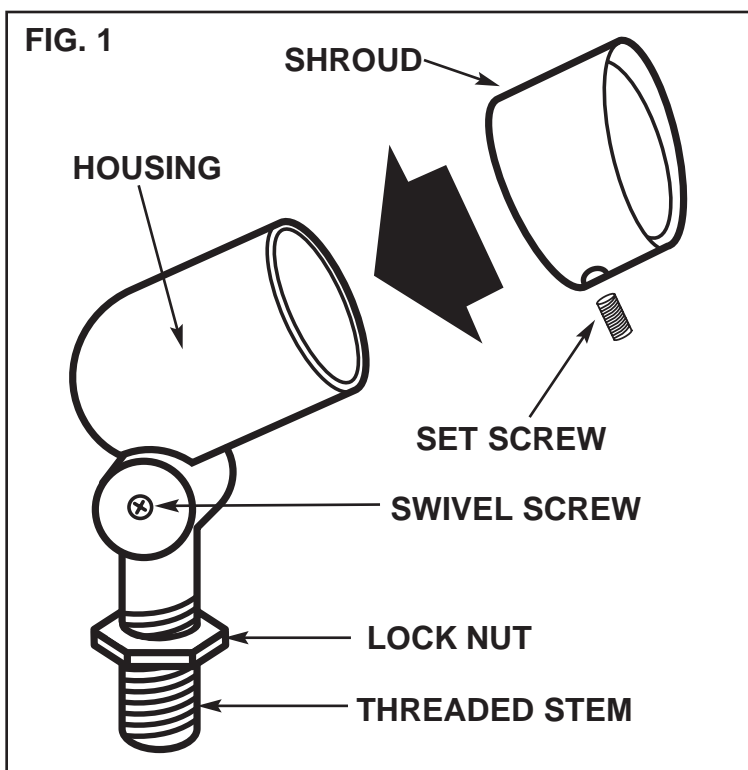

GROUNDING INSTRUCTIONS: Connect ground wire from fixture to ground wire from supply with UL listed wire nuts.

NOTE: Underwriters Laboratories (U.L.) does not require all fixtures to have ground wires. These fixtures still meet all U.L. specifications. The listing mark of Underwriters on the product identifies products manufactured under its listing and Follow-Up Service Programs.

NEVER CONNECT GROUND WIRE TO BLACK OR WHITE POWER SUPPLY WIRES.

CONNECTIONS

A. Take note of the color of the wire(s) on your fixture. Identify which group your fixture wire(s) falls into and connect the wires according to the directions below:

GROUP A: CONNECT TO BLACK HOUSE WIRE	FIGURE 2	GROUP A: CONNECT TO WHITE HOUSE WIRE
BLACK 		WHITE
*PARALLEL WIRE (ROUND & SMOOTH)		*PARALLEL WIRE (SQUARE & RIDGED)

*Note: When parallel wire is used, the tracer wire is square shaped or ridged and less tracer wire is round in shape or smooth. (Seen best when viewed from wire end.) To separate wires, grasp the ends of each wire and pull apart.

- B. Take your fixture wire(s) from group A and place evenly against the black wire from the outlet box. **DO NOT** twist wires together before using wire connectors.
- C. Fit a wire connector (not supplied) over the wires and screw the connector clockwise until you feel a firmness.
- D. Try gently to pull the connector off the wires. If you can pull the connector off, carefully re-do steps B and C, as above and check again for a firm connection.
- E. Connect the fixture wire from group B to the white wire from the outlet box in the same manner.



sea gull lighting®

Installation And Safety Instruction

HC-562

061005

Line art shown may not exactly match the fixture enclosed. However, the installation instructions do apply to this fixture.

Fill In Item Number On Carton And File This Sheet For Fixture Reference. ITEM# _____