

DESCRIPTION

- Metal construction with chrome plated, LifeShine® stainless or LifeShine® brushed bronze finishes
- 1/2" IPS connections will accept standard ball nose connection for 3/8" tubing
- Designed to be installed through 2, 1-1/4" (32mm) min. dia. holes
- Hydrolock™ quick connect installation
- Includes optional hot and cold temperature indicator

OPERATION

- Lever style handle
- Temperature controlled by 130° arc of handle travel

FLOW

- Aerator is limited to 2.2 gpm max. (8.3 L/min)

CARTRIDGE


- 1225 cartridge design with nonmetallic/nonferrous and stainless steel materials

STANDARDS

- Third party certified to CSA B125, ASME A112.18.1M, ANSI A117.1 and all applicable requirements referenced therein
- Certified to ANSI/NSF 61/9
- Complies with California Proposition 65 and with the Federal Safe Drinking Water Act


WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations

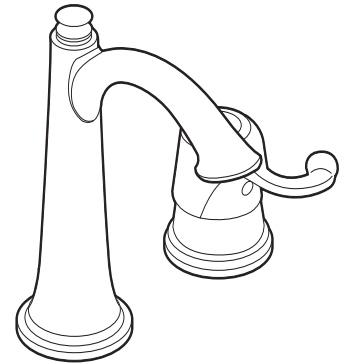

**Savvy™
Single-Handle Prep Bar Faucet**

Models: S691, S691SL, S691BB

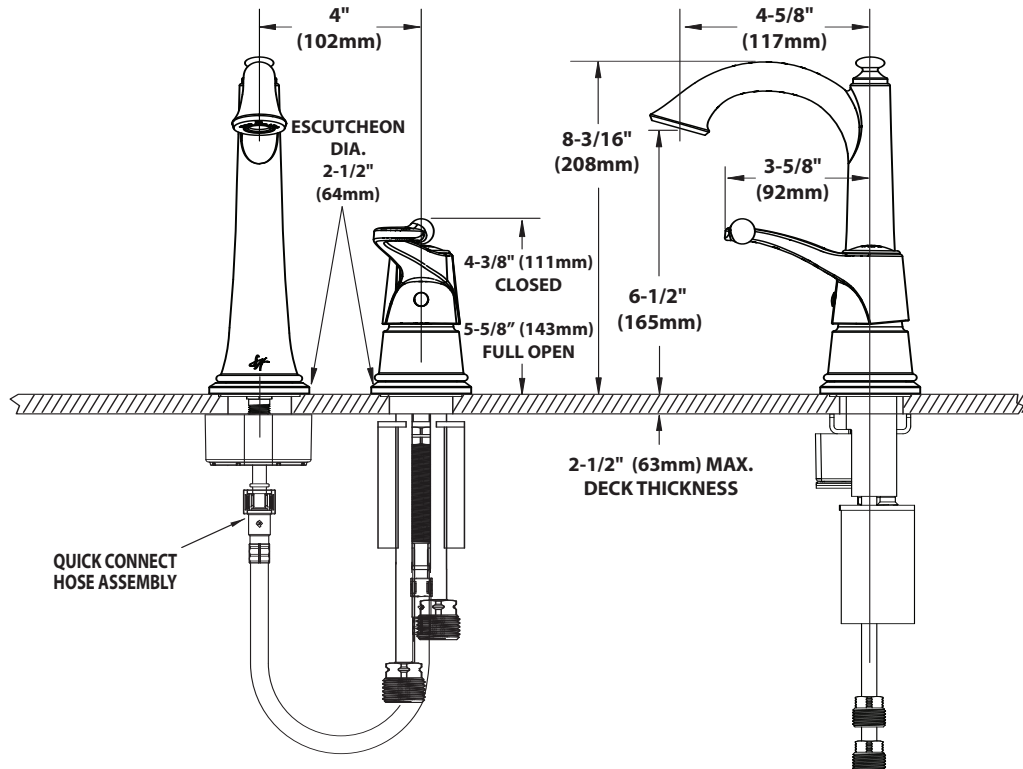

CRITICAL DIMENSIONS

(DO NOT SCALE)