


Important: Always unplug the power cord before installing or replacing bulb and before cleaning or other maintenance.

This light should be installed by a licensed electrician

LAMP INSTALLATION AND ASSEMBLY

1. Shut off power to the outlet box.
2. Attach the universal mounting plate to the outlet box using outlet box screws.
3. Determine the height which the fixture is to be hung. Loosen strain relief in the canopy to adjust length of cable. Be sure to secure the strain relief once the desired length is obtained
4. Insert bulbs in socket **NOTE: DO NOT TOUCH THE GLASS PART OF THE BULB WITH BARE HANDS.** Oil from fingerprints will reduce life of the bulb.
5. Screw protection glass over bulbs.
6. Place glass shade over the socket and secure it by pushing it all the way down.
7. Make appropriate electrical connections using wire nuts. If there is no green ground wire from the outlet box, then connect the fixture wire to the mounting plate with the green screw provided. Place connections in outlet box.
8. Attach canopy over outlet box with canopy nuts.
9. The cable lengths can be shortened if necessary by adjusting the position of the cable terminals.
10. Restore power to fixture.

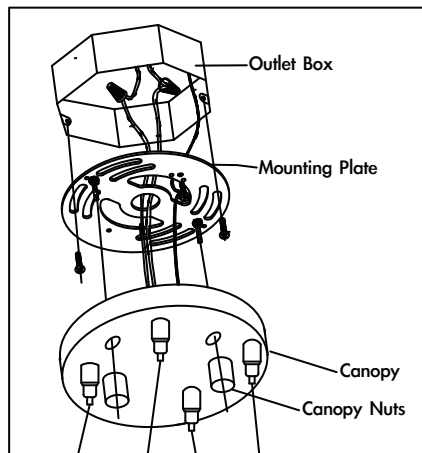

Important Safety Instructions

Lighted lamp is HOT!

1. Disconnect and allow to cool for at least 5 minutes before replacing bulb.
2. Bulb gets HOT quickly! Be sure power is off when re-lamping.
3. Do not touch hot enclosure.
4. Do not direct light at persons.
5. Do not look directly at lighted bulb.
6. Keep lamp away from curtains, draperies, and similar materials.
7. Use only a 120v, maximum 50watt, G9 base, halogen bulb.
8. Do not touch bulb at any time. Use a soft cloth to clean. Oil from skin may damage bulb integrity.
9. Do not operate the lamp with damaged or missing shield.
10. Damaged shields should be replaced before lamp is used.

