

Important: Always disconnect the power before installing or replacing bulb and before cleaning or other maintenance.


This light should be installed by a licensed electrician

LAMP INSTALLATION AND ASSEMBLY


1. Shut off power to the outlet box. (fig. A)
2. Attach the universal bar to the mounting plate using the included screws.
3. Attach the universal bar assembly to the outlet box using outlet box screws.
4. Make appropriate electrical connections using wire nuts. If there is no green ground wire from the outlet box, then connect the fixture wire to the mounting plate with the green screw provided. Place connections in outlet box.

-For outdoor installation : To prevent the water from flowing into the outlet box, put a bead of weather-proof caulking or silicone sealant around the inside edge of the backplate. Leave a 1/2" gap at the bottom to allow condensed moisture to drain.


5. Attach back plate to mounting plate with backplate screws. If installing outdoors, use the sealing washer, placed under top backplate screw.
6. Install medium base bulb (not included).
7. Slide shade onto the fixture.
8. Restore power to the fixture.

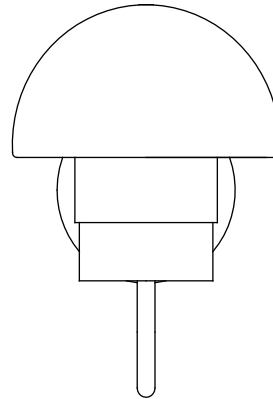

4912

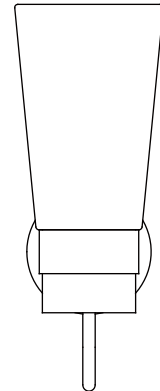

4910

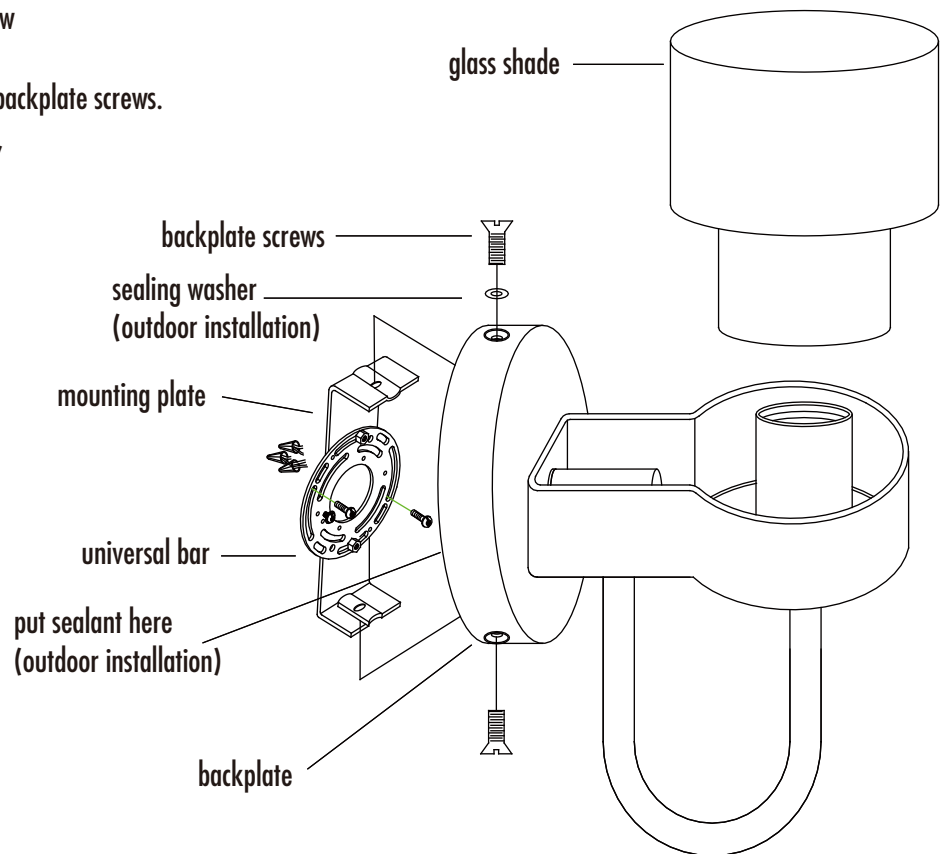

4911

