



Steambaths and Saunas

**Steam Generator****Model: SM-4****Features**

5-year parts warranty - 2-year labor warranty

Generator typically can be installed up to 25 ft. from the bathing area

Diagnostic LED Displays

Stainless Steel Construction

Solid-State Circuitry

**Codes/Standards**


UL 499

UL/CUL Listed

City of LA - Approved

City of New York - M.E.A. Approved

State of Mass. Approved

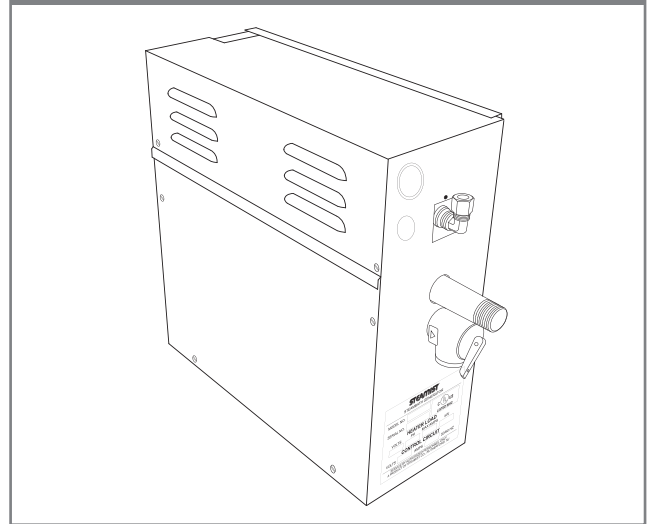**SM-4****Steam Generator Specification Chart**

Model Number	Product Number	KW Rating	Max. Cu. Ft. Range*	Volts/Phase/Max. Amps	Wire Size 90°C Copper AWG	Line Fuse	Dimensions L x W x H
SM-4	4000 4001	4	65	240/1/17 208/1/20	10 10	25 25	15" x 6" x 15.5"

\*Refer to sizing guidelines to accurately determine the proper size generator for the installation.

**Required Equipment**

TC-110, TC-125, TC-135, TC-150, DSC-425, or DSP Controls

**Required Electrical Service**

Dedicated circuit required: See Specification Chart for proper electrical requirements

**Product Information**

Water Supply - 3/8" Compression Fitting

Steam Line - 3/4" Brass NPT male thread

Pressure Relief Valve - 3/4" NPT female thread

Drain Line - None required

Auto Drain - Factory Installed Option

**Generator**

Weight - 30 lbs.

**Installation Notes**

Steam Generators can be typically mounted within 25 ft. of the bathing area.

Steam Generators should be accessible for service.

Do not install generators outside, in moist, humid area or in an area where parts may freeze or corrode.



Steamhead to be mounted 18" above floor or 6" above rim of tub and as far from the seating area as possible.

**Rough-in Notes**

Access: 21" W x 18" D x 22" H (28" W with Auto Drain)

Dimensional Drawing

Model: SM-4

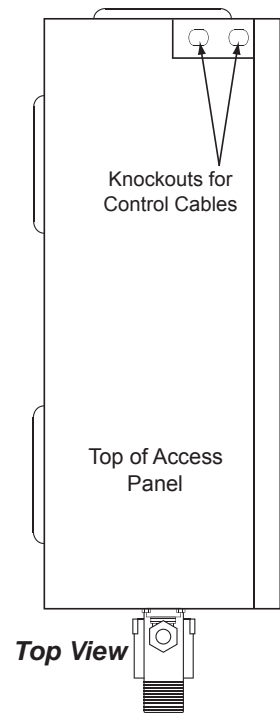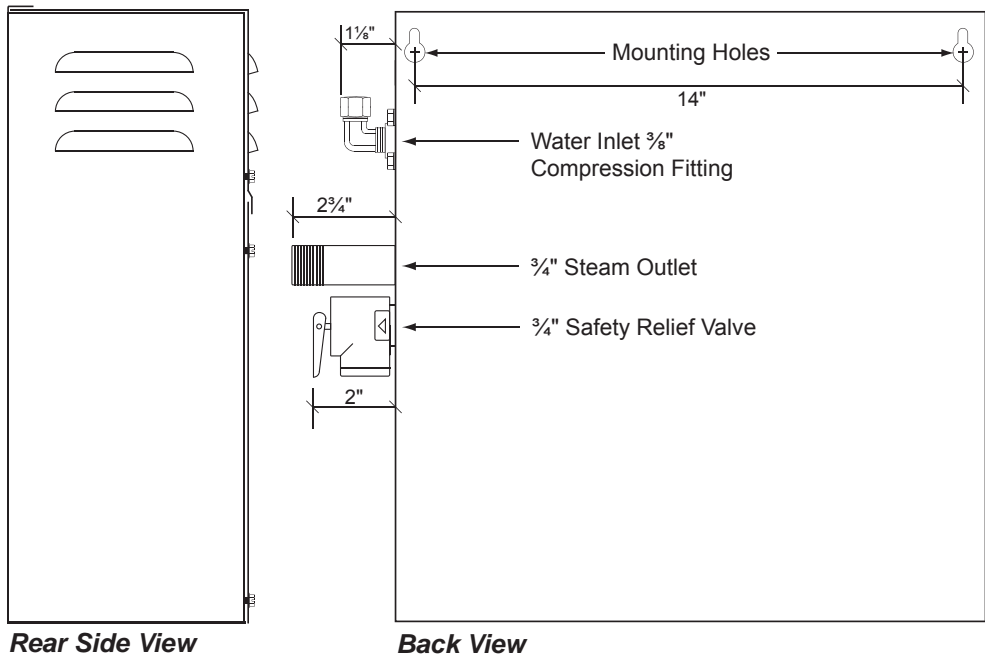

\*Add  $\frac{1}{4}$ " to the dimension for the louvers

